

Storm Water Pollution Prevention Plan (SWPPP)

**Mountain Valley Pipeline Project
Laydown Yard 029**



Mountain Valley Pipeline, LLC
2200 Rice Drive, Suite 200
Canonsburg, PA 15317

Stormwater Pollution Prevention Plan (SWPPP)
In compliance with:
Project Specific Standards and Specifications, including
Applicable Portions of the General VPDES Permit for Discharges of Stormwater
From Construction Activities, Permit No. VAR10
Virginia Stormwater Management Program (VSMP)

Mountain Valley Pipeline

SWPPP Coordinator:

Brian M. Clauto

(Name)

(Signature)

Sr. Environmental Coordinator

(Title)

EQT Corporation

(Company)

724-873-3465

(Phone #)

Delegation of Authority to SWPPP Coordinator:

Robert J. Cooper, SVP-MVP
Construction and Engineering

(Name of Person(s) or Position(s))

(Signature)

Mountain Valley Pipeline, LLC

(Company)

2200 Energy Drive, Suite 200
Canonsburg, PA 15317

(Address)

412-395-3361

(Phone #)

CERTIFICATION STATEMENT

I certify under penalty of law I have read and understand this document and this document and all attachments were prepared in accordance with a system designed to assure qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature¹:	Date:
Printed Name: Robert J. Cooper	Title: SVP-MVP Construction and Engineering

¹ Certification will be signed by a *responsible corporate officer* or by a *duly authorized representative* of that person. Specific requirements and responsibilities of the responsible corporate officer or duly authorized representative as well as delegate of authority to SWPPP Coordinator are discussed in detail below.

Certification of Stormwater Pollution Prevention Plan Revisions

Amendments, modifications, and updates will be made to the Stormwater Pollution Prevention Plan (SWPPP) whenever there is a change in the design, construction, operation, or maintenance that has a significant effect on the potential discharge of pollutants to surface waters. Revisions may include additional or modified control measures identified in the field during construction. These small field-approved changes will be documented and dated on the construction alignment sheets, site plans, and/or inspection reports. Revisions to the SWPPP narrative will be recorded within Appendix 2 in the format shown below, as necessary:

Signature¹:	Date:
Printed Name:	Title:
Revision 1	Revision Description: EXAMPLE #1

Signature¹:	Date:
Printed Name:	Title:
Revision 2	Revision Description: EXAMPLE #2

Signature¹:	Date:
Printed Name:	Title:
Revision 3	Revision Description: EXAMPLE #3

Signatory Requirements

As stipulated in the Virginia Stormwater Management Act, the Virginia Erosion and Sediment Control Law, and associated regulations, where applicable; all reports, including SWPPPs, and other information requested by the State Water Control Board (Board) or DEQ will be signed by the following person or by a duly authorized representative of that person:

For a corporation: by a responsible corporate officer. For the purpose of this chapter, a responsible corporate officer means (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy-making or decision-making functions for the corporation; or (ii) the manager of one or more manufacturing, production, or operating facilities, provided the manager is authorized to make management decisions that govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long-term compliance with environmental laws and regulations; the manager can ensure that the necessary system are established or actions taken to gather complete and accurate information for Commonwealth permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.

A person is a duly authorized representative only if:

- The authorization is made in writing by a responsible corporate officer
- The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for DETI (a duly authorized representative may thus be either a named individual or any individual occupying a named position); and
- The signed and dated written authorization is included in the SWPPP. A copy must be provided to DEQ, if requested.

Changes to authorization If a duly authorized person is no longer accurate because a different individual or position has responsibility for the overall operation of the construction activity, a new authorization satisfying the duly authorized person requirements will be submitted to DEQ prior to or together with any reports or information to be signed by an authorized representative.

Certification: Any person signing a document will make the following certification:

“I certify under penalty of law that I have read and understand this document and that this document and all attachments were prepared in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.”

Delegation of Authority to SWPPP Coordinator

All reports required by the Virginia Stormwater Management Act, the Virginia Erosion and Sediment Control Law, and associated regulations, where applicable, including SWPPPs, and other information request by the Board or DEQ will be signed by a responsible corporate officer or by a duly authorized representative of that person. A person is a duly authorized representative only if:

- The authorization is made in writing by the responsible corporate officer;
- The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plan manager, operator of a well or well field, superintendent, position of equivalent responsibility, or an individual or a position having overall responsibility for environmental matters for the operator. (A duly authorized representative may thus be either named individual or any individual occupying a named position); and
- The signed and dated written authorization is included within the SWPPP.

If a duly authorized representative is no longer accurate because a different individual or position has responsibility for the overall operation of the construction activity, a new authorization satisfying the above requirements will be submitted to DEQ prior to or together with any reports or information to be signed by an authorized representative.

Stormwater Pollution Prevention Plan (SWPPP)
Mountain Valley Pipeline, Laydown Yard 029
Virginia Department of Environmental Quality

TABLE OF CONTENTS

I.	Introduction	
	Overall Project Summary	4
	A. Site Access	4
	B. Applicability of General VPDES Permit for Discharges of Stormwater from Construction Activities	5
	C. Plan Purpose	5
II.	Plan Requirements	
	A. General Requirements	6
	1. Project Design Plan Approval	6
	2. Plan Administration	6
	3. Plan Updates and Modifications	7
	4. Safety and Environmental Awareness Program (SEAP)	7
	B. Specific Requirements	7
	1. Stormwater Pollution Prevention Plan (SWPPP).....	7
	2. Controls and Measures	8
	3. Project Design Plans (ESC Plan)	9
	a. Limits of Clearing	9
	b. Construction Access Establishment	9
	c. Erosion and Sediment Control Installation	9
	d. Instream BMPs.....	10
	e. Dry Crossing Techniques.....	10
	f. Protect Slopes.....	11
	g. Convey Stormwater in a Non-Erosive Manner.....	11
	h. Control Other Pollutants	11
	i. Control Dewatering.....	11
	j. Maintain BMPs	12
	k. Manage the Project	12
	4. Stormwater Management Plan	13
	5. Pollution Prevention Plan.....	13
	a. Spills	15
	b. Fuels and Oils	16
	c. Hazardous Substances and Toxic Chemicals.....	17
	d. Sanitary Waste	17
	e. Concrete	18
	f. Water Testing.....	18
	g. Spill Reporting Forms and Guidelines.....	18

6. Receiving Waters	18
7. Total Maximum Daily Load (TMDL) Limitations and Impaired Waters	18
8. Maintenance	19
9. Inspections	19
C. Critical Areas and Components	21
1. Soil Segregation and Stabilization	21
a. Topsoil Segregation	21
b. Temporary and Permanent Stabilization.....	22
i. Temporary Stabilization	
ii. Permanent Stabilization	
c. Immediate Stabilization	23
i. Stream Bank Stabilization	
ii. Wetlands	
d. Mulching	23
e. Installation and Seed Mixes	24
i. Seedbed Preparation	
ii. Installation of Saplings	
iii. Erosion Control Fabric	
iv. Bare-Root Sapling and Shrub Planting	
v. General Seed Mixes	
vi. Seeding Rates	
vii. Seeding of Permanent Vegetation	
viii. Seed Mixes for National Forest Lands	
ix. Low-Maintenance Seed Mix	
2. Waters of the United States (WOTUS).....	26
a. Wetland Crossings	27
b. Waterbody Crossings	27
c. Crossing Methods	27
i. Flume Pipe Crossing	
ii. Cofferdam	
iii. Dam and Pump	
iv. Equipment Bridges	
v. Temporary Road Crossings	
d. Clearing.....	30
e. Sediment Barriers.....	30
f. Restoration	31
i. Restoration per FERC Procedures	
g. Post-Construction Maintenance	32
3. Karst Terrain	34
a. Guidance for Construction in Karst Terrain	34
b. Karst Terrain Specialists and Inspections	34
c. Identifying Potential Karst Features	34
d. Measures to Avoid Impacts	35

e. Reportable Spills	35
4. Acid Soils	35
5. Time of Year Restrictions, Endangered & Threatened Species....	36

III. Important Guidance Documents to Reference

Document	Approval/Revision Date*	Location On-Site*
MVP Specific Annual Standards & Specifications	June 20, 2017	
Joint Permit Application & Nationwide Permit 12	December 26, 2017	
FERC Documents	October 13, 2017	
MVP-LY-029 Approved Plans		

* Table to be updated by SWPPP Coordinator when information becomes available.

IV. Appendices

- Appendix 1—General VPDES Permit for Discharges of Stormwater from Construction Activities
- Appendix 2—Record of Land Disturbance and SWPPP Modifications (Major Revisions)
- Appendix 3—Record of Site Inspections
- Appendix 4—Record of Contractor Certifications
- Appendix 5—Record of Inspector Certification
- Appendix 6—Temporary BMP Location Tracking Table (Minor Revisions)
- Appendix 7—Project Design Plans (Erosion and Sediment Control Plan Sheet Excerpts)
- Appendix 8—Record of SWPPP Availability
- Appendix 9—Spill Prevention Controls and Countermeasure Plan (SPCC)
- Appendix 10—Miscellaneous [*Maps, Impaired Waters Fact Sheets, Time-of-Year Restriction Table, etc.*]

Stormwater Pollution Prevention Plan (SWPPP)

Mountain Valley Pipeline – Laydown Yard 029

I Introduction

The Mountain Valley Pipeline (Project) installation will extend from the existing Equitrans, L.P. transmission system and other natural gas facilities in Wetzel County, West Virginia to Transcontinental Gas Pipe Line Company, LLC's (Transco) Zone 5 Compressor Station 165 in Pittsylvania County, Virginia. In addition to the pipeline, the Project will include approximately 171,600 horsepower (hp) of compression at three compressor stations currently planned along the route, as well as measurement, regulation, and other ancillary facilities required for the safe and reliable operation of the pipeline. The pipeline is designed to transport up to 2.0 billion dekatherms per day of natural gas. A project location map is provided in Appendix 10.

The Laydown Yard 029 (MVP-LY-029) is located within Giles County and consists of approximately 5.42 acres of industrial land to be converted to a temporary pipe laydown and vehicle parking area. As shown in the plans, no earth disturbance is anticipated. The pipeline construction corridor generally will be 125 feet wide, although the LOD will be narrower where necessary to minimize impacts to sensitive resources. Fifty feet will be maintained as the permanent right of way (ROW) unless otherwise noted. This area is required to provide a safe non-congested work area. The additional temporary right-of-way will be necessary for the safe travel of construction and maintenance vehicles and equipment as well as stockpiling any additional material that may be encountered during trenching. At a majority of the wetland and stream crossings, the LOD has been reduced to 75 feet in an effort to reduce adverse impacts to these aquatic resources.

Permanent and temporary access roads are necessary to construct and maintain the project. The authorized LOD for access roads is typically 40 feet. However, the actual road width and area of disturbance will typically be less than the 40-foot LOD depicted on the approved Plan Drawings.

Additional Temporary Workspaces (ATWS) are also incorporated within the LOD to provide areas for vehicle parking, material storage, turning radius along access roads, staging areas, and support areas for stream and wetland crossings. MVP will employ special construction techniques where the slopes typically exceed 20 percent throughout the Giles County, which may also be required in expanded workspace areas.

Additional ancillary aboveground facilities will ultimately include pig launcher and receiver sites at the beginning and end of the pipeline and meter station, along with mainline valve (MLV) sites within the pipeline permanent ROW.

A) *Site Access*

Field investigations have identified the availability of both public and private roads that will be sufficient in providing access to most work areas for the pipeline installation. In most instances, existing access roads would only be for temporary use in the support of the construction phase of the project. Once construction is complete, the use and ownership of the temporary access roads will be returned to the

private landowner. Permanent access roads are necessary for safe operation and maintenance of the pipeline. Through landowner agreements, MVP will continue use of these private roads during operation of the pipeline facilities. Following construction, MVP will return both temporary and permanent roads to pre-existing conditions unless otherwise noted in the approved plans.

The attached Erosion and Sediment Control Plans Construction Sheets (Appendix 7) identify both the permanent and temporary access roads as either being “Maintained” or “Graded and Maintained”. A “Maintained” access road will only require crushed stone placement and appropriate smoothing if rutting or roadway degradation occurs. The sheet flow along the “Maintained” roadways will be controlled using existing drainage infrastructure. Additional BMPs will be installed as necessary to prevent any off-site movement of sediments during construction use. A “Graded and Maintained” roadway may require temporary widening, minor grading, and/or crushed stone placement to maintain the existing road surface. The sheet flow along these roadways will be controlled with drainage channels, broad based dips, and waterbars per the approved ESC plans. Additional BMPs will be installed as necessary to prevent any off-site movement of sediment.

New access roads are proposed in limited areas. Streams, wetlands, or other aquatic features along the existing access roads will be crossed according to the appropriate detail on the project plan drawings. Culverts to be replaced or constructed were sized using the Rational Formula for a 24-hr 10-year storm and Manning’s Equation. In areas with unexpected drainage, culverts will be appropriately sized and installed to meet or exceed the requirements in the Virginia Erosion and Sediment Control Management Handbook Third edition 1992.

B) Applicability of General VPDES Permit for Discharges of Stormwater from Construction Activities

Discharges of uncontaminated stormwater associated with the construction of natural gas transmission pipelines and certain associated facilities are not subject to a permitting requirement under the Clean Water Act, 33 U.S.C. § 1342(l)(2); 40 C.F.R. § 122.26(a)(2), or State Water Control Law, 9VAC25-870-380.A.2. For this reason, the Project will not be covered by the General VPDES Permit for Discharges of Stormwater from Construction Activities, 9VAC25-880-70 (General Permit).

Nevertheless, the State Water Control Law provides that projects covered under annual standards and specifications should be “consistent with” the General Permit, including its requirements for a SWPPP, Va. Code § 62.1-44.15:31. Accordingly, this Plan has been prepared to be consistent with all relevant and applicable conditions of the General Permit. Relevant provisions of the General Permit are cited in this Plan where appropriate and are thereby incorporated by reference. A complete list of the incorporated provisions of the General Permit can be found in Appendix 1.

C) Plan Purpose

The Stormwater Pollution Prevention Plan (SWPPP) is referred to as the “Plan.” The purpose of the Plan is to:

1. Identify potential sources of pollution that may reasonably be expected to affect the quality of stormwater discharges from the construction site, and,

2. To describe and ensure the implementation of practices that will be used to reduce pollutants in stormwater discharges from the construction site and to assure compliance with the applicable conditions of the General Permit.

Implementation of the components of this SWPPP are required as a condition of the Project Specific Standards and Specifications (PSS&S). Prior to any earth disturbing activities, the Erosion and Sediment Control Plans and Stormwater Management Plans must be approved by DEQ. References to the PSS&S in this SWPPP refer to the version that was approved by DEQ on June 20, 2017, and any subsequently approved revisions thereto.

II Plan Requirements

A) General Requirements

1) Incorporation of DEQ-Approved Project Design Plans

It was required that MVP submit Erosion and Sediment Control Plans (ESC Plans) to DEQ for review and approval prior to commencing any land disturbing activities. To be approved, the plans must be consistent with the PSS&S, state requirements for erosion and sediment control (including Virginia Erosion and Sediment Control Handbook, Third Edition), and applicable requirements the General Permit. These DEQ approved plans are referred to in the SWPPP as the “Project Design Plans”. The SWPPP requirements of the General Permit are satisfied by incorporating by reference the Project Design Plans developed for this construction activity, *provided that they meet or exceed the requirements of Part II.A. of the General Permit*. Relevant excerpts from the approved Project Design Plans are included in Appendix 7 of this SWPPP.

2) Plan Administration

The Plan shall be certified in accordance with the applicable conditions of the General Permit (the certification statement is presented in the beginning of this Plan). Copies of the Plan shall be kept on-site and be made available to the Department, or other regulatory agencies having authority, upon request. The Plan must also be available to all operators identified as having responsibilities to carry out provisions contained in the Plan.

The Plan must be made available to the agencies listed in the Section II.D.2 of the General Permit at the time of on-site inspections. The Plan must be maintained on-site when no personnel are present – if no such location exists on-site, notice of the SWPPP’s location must be posted in accordance with the Section II.C of the General Permit. Furthermore, a sign or some form of notice must be posted near the entrance of the construction site (Section II.C.). Additionally, the Plan must be made available to the public either electronically or by hard copy per Section II.D.3 of the General Permit. A Record of SWPPP Availability is enclosed within Appendix 8.

3) Plan Updates & Modifications

The Plan shall be amended whenever there is a change in design, construction, operation, or maintenance of the construction site that has a significant effect on the potential for the discharge of pollutants to surface waters and that has not been addressed in the normal implementation of the Plan. The Plan shall also be updated whenever it is found to be ineffective in meeting the applicable requirements of the General Permit. If approval by DEQ is necessary for the control measure, revisions shall be completed no later than seven calendar days following approval. Procedures and information on major and minor modifications are described in detail in the PSS&S and can be found in Appendices 3 and 7 of the SWPPP.

Modifications to the Plan as well as dates of major land disturbance, stabilization, and activity will be noted within the “Record of Land Disturbance and SWPPP Modifications” document found within Appendix 2. If modification or amended activities cannot be adequately described within Appendix 2, additional documentation will be included within the Plan.

4) Safety and Environmental Awareness Program

DEQ must be provided written or electronic notification at least 10 business days prior to pre-construction conferences and Safety and Environmental Awareness Program (SEAP) training. SEAP will be presented by MVP staff to DEQ staff during each spread’s pre-construction meeting and subsequently to all visitors, agency representatives, contractors, and company staff before entering the Project work limits.

B) *Specific Requirements*

1) Stormwater Pollution Prevention Plan Contents

Many of the applicable items required by the General Permit (Part II A., Appendix 1) can be found in the Project Design Plans, which are incorporated by reference into this Plan. A summary of the required elements is provided in Table 1, with a reference to the sheet number in the design plans where the required element can be located.

Table 1. Site Description Elements

Please refer to the referenced location (i.e. Plan Sheet #) in the Project Design Plans or as referenced elsewhere.

General Permit Part II A.1...	<u>REQUIRED ELEMENT</u>	<i>Location</i>¹ Approved MVP-LY-029 Plan
c.	A copy of the VPDES Construction General Permit.	See Appendix 1
d.	Description of construction activity.	NARRATIVE 1 OF 4 & LY-029-007 of 10
e.	A legible site plan, to include the following:	-
e.(1)	Directions of stormwater flow and approximate slopes anticipated after major grading activities.	SHEETS LY-029-009 of 10 & LY-029-010 of 10
e.(2)	Limits of land disturbance including steep slopes and natural buffers around surface waters that will not be disturbed.	SHEETS LY-029-009 of 10 – LY- 029-010 of 10
e.(3)	Location of major structural and nonstructural control measures.	SHEETS LY-029-009 of 10 & LY-029-010 of 10
e.(4)	Locations of surface waters.	See Exhibit 3B, Appendix 10
e.(5)	Locations where concentrated stormwater is discharged.	SHEETS LY-029-010 of 10
e.(6)	Locations of support activities, when applicable and when required by DEQ (vehicle washing areas, storage areas, concrete wash out areas, fueling areas, sanitary waste facilities, etc.)	See onsite map
e.(7)	The location of the on-site rain gauge or methodology established in consultation with DEQ.	See Appendix 4 (Inspection Forms)
-	<u>ADDITIONAL INFORMATION</u>	-
	A legible general location map	See Appendix 10
	Description of construction sequence of site development activities.	NARRATIVE 4 OF 4
	Record of dates when major grading activities occur.	See Appendix 2
	Receiving and impaired waters information.	See Sect. II.B.6 & 7 below
	Description of other potential pollution sources, including vehicle fueling, chemical storage areas, sanitary waste facilities, construction debris, litter, etc.	See Sect. 5 below & Appendix 9

¹[Attach to this Plan any required elements that are not found in the design plans.]

2) Controls and Measures

The General Permit requires the use of various types of controls and measures that are implemented to control pollutants in stormwater discharges from the project site. The General Permit conditions specifically require the implementation of erosion and sediment control practices (both structural and non-structural), stormwater management practices, and specific other controls to reduce the discharge of pollutants. All E&S and SWM/BMP controls employed in this project were selected to meet and/or exceed state and local requirements and are detailed in the Project Design Plans.

3) Project Design Plans (Excerpts of Erosion and Sediment Control Plans)

The Project Design Plans for this project contain detailed information regarding erosion and sediment controls used in this project. Specifically, E&S control measures can be found on the Project Design Plans; Sheets #LY-029-10 of 10 (also located within Appendix 7). The Project Design Plans, PSS&S, and General Permit include conditions which are detailed below.

General stabilization and structural controls will be used in sediment and erosion control practices to divert stormwater flows away from exposed areas, convey runoff, prevent sediments from moving off-site, and reduce the erosive forces of runoff waters.

a. Limits of Clearing

Clearing limits will be staked and visibly flagged prior to construction. Adjacent sensitive areas and no-access roads will be demarcated by signage and/or orange construction fence.

b. Construction Access Establishment

The majority of access to the site will be via existing roads. Construction entrances will be installed on site access roads to remove sediment prior to exiting the site. Construction entrances will follow VESCH STD & SPEC 3.02. In instances where there are private residential driveways along the access roads, the construction entrance has been moved past the residential driveways. This was done to prevent the residents from driving over the construction entrances.

c. Erosion and Sediment Control Installation

The Project Design Plans utilize several best management practices (BMPs) throughout the Project area to prevent sediment from leaving the site. As depicted on the plans, controls will be placed along the boundaries of sensitive areas, at stream and wetland crossings, downslope of all stockpiles, and where the potential for off-site sediment transport exists. The BMPs to be used throughout this project include:

- Safety Fence (VESCH STD & SPEC 3.01)
- Construction Entrance (VESCH STD & SPEC 3.02)
- Sediment Barriers (VESCH STD & SPEC 3.04, 3.05, 3.06, and 3.27)
- Belted Silt Retention Fence (see detail MVP-ES9)
- Compost Filter Sock (see detail MVP-ES3).
- Super Silt Fence (see detail MVP-ES9.2-.2A)
- Clean Water Diversions (see detail MVP-ES50-50.1)
- Temporary Diversion Dike (VESCH STD & SPEC 3.09)
- Temporary & Permanent Slope Breakers/Temporary Right-of-Way Diversion (VESCH STD & SPEC 3.11)
- Temporary Stream Crossing (Equipment Crossing) (VESCH STD & SPEC 3.24)

- Dewatering Structure (VESCH STD & SPEC 3.26)
- Rock Check Dam (VESCH STD & SPEC 3.20)
- Outlet Protection (VESCH STD & SPEC 3.18)
- Soil Stabilization Blankets & Matting (VESCH STD & SPEC 3.36), as well as hydraulically applied soil stabilization blankets and matting such as Earthguard, Flexterra, or equivalent (see details MVP-ES40 and MVP-ES40.1)
- Vegetative Streambank Stabilization (VESCH STD & SPEC 3.22)
- Trench Plugs/Breakers (see detail MVP-20)
- Pumped Water Filter Bag (see detail MVP-ES2)

d. Instream BMPs

Procedures for stream crossings include:

- Minimize clearing and grubbing of vegetation adjacent to streams as noted on approved plans;
- Only that area which is required for pipeline installation shall be disturbed within the proposed LOD or right-of-way at stream crossings;
- Locating staging areas 50 feet away from the stream where possible;
- Storing chemicals, storing equipment, washing equipment, or refueling equipment must be done in areas that are greater than 100 feet away from stream;
- Spoil placement and BMPs will be monitored at all times during stream crossing procedures; once work within a stream area is started, it will be conducted continuously to completion, emphasis will be placed on minimizing time of disturbance;
- Spoils from stream crossings must be placed at least 10 feet from the water's edge; and
- Construction equipment will not be allowed in the stream channel when excavation can be done from either side of a temporary crossing while working at the stream crossing.

The following sections describe stream crossing techniques that may be used during pipeline relocation/installation activities. Refer to the detail sheets and approved Project Standards and Specifications for additional information.

e. Dry Crossing Techniques

These techniques will be used to perform pipeline work in a relatively dry working condition and include pump around, flume pipe, and cofferdam (Porta-dam) crossing methods. The deciding factors selecting the crossing technique for a given crossing are stream size, flow, and water depth. Horizontal Directional Drilling and conventional boring are also techniques that are utilized in specific areas of the project. E&S control measures will be installed prior to any earth disturbance and refurbished if necessary immediately after disturbance of the waterbody. Further details on procedures for the installation and maintenance of crossing methods can be found within Section C-2 (Waters of the United States – Wetland and Waterbody Crossing Methods) of the PSS&S.

f. Protect Slopes

MVP will employ special construction techniques within areas considered as steep slope conditions as discussed in Section 1.3 of the PSS&S.

The Project Design Plans show the placement of steep slope erosion controls on all slopes greater than 30-percent. These slopes will be stabilized with steep slope soil stabilization blankets and matting techniques in accordance with VESCH STD & SPEC 3.36. In addition to VESCH STD & SPEC 3.36, MVP may utilize hydraulically applied soil stabilization blankets and matting (i.e., Earthguard, Flexterra or equivalent) as an alternative to rolled erosion and sediment control blanket material. Information regarding the hydraulically applied blankets is provided in details MVP-ES40 and MVP-ES40.1.

Permanent and temporary ROW Diversions/Waterbars are depicted on the plans and are placed along the pipeline following the spacing specified in PSS&S detail MVP-17. ROW Diversions/Waterbars are intended to reduce runoff velocity and divert water off the construction ROW to prevent slope erosion. Permanent waterbar cross slopes will not exceed 5% and will have end treatments to ensure non-erosive velocities and discharge as sheetflow.

g. Convey Stormwater in a Non-Erosive Manner

Stormwater from the site will be managed as needed to satisfy the 9VAC25-870-66 water quantity requirements. Details pertaining to stormwater runoff considerations, stormwater BMP designs, and associated calculations are provided in Sections 4.0 and 5.0 of the PSS&S.

h. Control Other Pollutants

Sediment removed from BMPs will either be spread in a protected area to dry and then recycled as fill material or disposed of at an approved waste disposal site. Used water filter bags will be disposed of at an authorized waste facility. The contractor will not illegally bury, dump, or discharge building material or wastes at the site.

i. Control Dewatering

The pipeline trench will be cleared of debris and dewatered prior to lowering in pipe or equipment. Water from dewatering operations will be filtered through an approved filter bag that will comply with manufacturer's recommendations for inspection and maintenance, passed through a DEQ standard dewatering structure, and discharged in a manner that does not result in accelerated erosion or adversely affect off-site property. Trench dewatering will be conducted through a filter bag (see detail MVP-ES2) and placed within a dewatering structure in accordance with VESCH STD & SPEC 3.26. Pumped Water Filter Bags should be replaced as often as necessary to maintain function and prevent a failure of the filter bag. Dewatering activity will be monitored at all times the activity is ongoing.

Pumps used in the dewatering activity will be placed in a secondary containment measure to prevent spills of fuel or oil to the ground surface in accordance with the SPCC Plan. Dewatering structures will be constructed in a stabilized area away from waterbodies and wetlands and sized according to the intended use. Discharge will be monitored and controlled to prevent erosion and sedimentation from occurring to adjacent areas as well as to prevent over pumping of the dewatering structure. The discharge will be directed away from any waterbody, wetland or other sensitive environmental resources. The discharge activity will be monitored during the activity to ensure that the discharge is thoroughly filtered and no erosion or sedimentation occurs at the discharge point.

j. Maintain BMPs

Temporary and permanent E&S control BMPs shall be maintained and repaired as needed to assure continued performance of their intended function. Maintenance and repair shall be conducted in accordance with the corresponding VESCH Standards and Specifications as well as the approved PSS&S.

Inspection of all E&S control BMPs within disturbed areas will be performed as specified in Section 2.0 within the PSS&S and at a frequency of at least once every four business days.

Repairs or maintenance shall be performed as soon as practicable, as specified in the PSS&S. All public and private roads adjacent to a construction entrance must be inspected and cleaned of debris that originated from the construction site.

k. Manage the Project

A copy of the ESC Plans and appropriate inspection/maintenance logs are to be kept on site at all times during active construction.

The project will be generally maintained in accordance with the following:

- i. Coordination with Utilities – Notify VA One Call by calling 811 or 1-800-552-7001 at least 3 days prior to construction.
- ii. Inspection and Monitoring – E&S BMPs will be inspected as discussed in the previous section. Temporary and permanent E&S BMPs will be maintained and repaired as needed.
- iii. Reporting – The E&S plan holder will notify the VA DEQ of any spill/discharge of pollutants as required by applicable law (see Table 2 below).
- iv. Equipment Maintenance – Maintenance of equipment will be performed using accepted practices (i.e. plastic mats, drip pans, etc.)

4) Stormwater Management Plan

Stormwater management plans ensure the implementation and maintenance of post-development stormwater management controls to minimize pollutants in stormwater discharges from the site after final stabilization. Stormwater management controls that mitigate changes to pre-development runoff characteristics assist in protecting and maintaining the physical and biological characteristics of receiving streams and wetlands. Therefore, SWPPPs must include an approved stormwater management plan for new construction activities, a stormwater management plan compliant with the requirements of 9VAC25-870-93 through 9VAC25-870-99 of the VSMP Regulation for existing construction activities, or a stormwater management plan prepared in accordance with department-approved PSS&S and applicable amendments.

The Project Design Plans contain detailed information regarding stormwater management for this project. Specifically, elements required by 9VAC25-870 can be found in the approved plan set.

5) Pollution Prevention Plan

The following Pollution Prevention Plan (Table 2) addresses potential pollution-generating activities that could affect the quality of stormwater discharges from construction and related support activities. Specific locations of potential pollutants can be found on the updated project design plans or as referenced elsewhere. The person responsible for implementing the pollution prevention plan is the Lead Environmental Inspector. All necessary personnel must be familiar with pollution prevention practices and procedures.

Further detail regarding the plan for storing oil as a part of construction to prevent a discharge into navigable waters or adjoining shorelines can be found in Appendix 9: Spill Prevention Control and Countermeasure Plan (SPCC).

Note: Section 3.1.3 within the SPCC states, “In areas where hazardous materials are required to be stored or used within a wetland, the Contractor shall prepare and submit for approval a secondary containment plan before working in the wetland area.” Contrary to the SPCC, in an effort to further reduce the unlikely possibility of an unauthorized discharge, the PSS&S states that no refueling, hazardous materials storage, equipment maintenance, or equipment parking will take place within 100 feet of the waterbody or wetland crossing. If pumps are being used within the waterbody or wetland crossing, small quantities of fuel in Gerry cans may be stored on site with the pump in a secondary spill containment device, otherwise fuel may not be stored within waterbody and wetland crossings.

Table 2. Pollution Prevention Plan

Prevention - Minimizing- Containing - Cleanup – Reporting		
Any discharge/spill must be reported to the appropriate authorities immediately, but no later than 24 hours, if it meets or exceeds the applicable reportable threshold for the spilled material. Any Fish Kills must be reported. Reporting information regarding specific substances can be found below.		
Potential Pollution Generating Activities:		Prevention/Response Quick Reference Chart
Hazardous Materials	Fuels, Hydraulic Oils and Vehicle Maintenance	Vehicle refueling and maintenance operations will be conducted at a dedicated location away from surface waters. Secondary containment (berms), readily available spill kits and cover will be provided where appropriate. For additional information, see Section 5.b below.
	Soaps, Solvents, Detergents & Wash Water	Chemicals will be safely stored in sealed containers when not in use. Clean-up and disposal will be done in a manner to prevent contact with stormwater, utilizing tarps, buckets, and proper disposal techniques. For additional information, see Section 5.c below.
	Hazardous or Toxic Chemicals	Chemicals will be stored in sealed containers in a safe location. Likely chemicals on site include: asphalt sealants, adhesives, concrete admixtures, fertilizers, pressurized gasses, and landscape materials. For additional information, see Section 5.c below.
	Fertilizers	Fertilizers will be applied per manufactures recommendations and not during rainfall events. For additional information, see section 5.c below.
	Sanitary Wastes	On site portable lavatories must be located away from surface waters and storm drains. Any spills must be cleaned according to federal, state and local regulations. For additional information, see section 5.d below.
	Welding Byproducts	All welding byproducts, including welding rods and gasses, will be handled and disposed of according to the manufacturers' recommendations.
Non-Stormwater Discharges (Examples listed in Sect 2. B. 10)	Wash Water without Soaps	Wash water will be directed to sediment basins or traps, using filtration devices such as filter bags or sand filters, or similarly effective controls.
	Site Excavation Dewatering	Must pass through a sediment trapping device and be released onto a stabilized surface. Conveyance channels must be stabilized.
	Hydrostatic Testing	All hydrostatic testing releases will be to uplands and will comply with monitoring and effluent limits requirements specified in DEQ General Permit No. VAG83 (9VAC25-12-80). Releases that inadvertently flow into surface waters must be documented and notice provided to DEQ in accordance with VAG83.
	Utility Flushing	Energy from clean water releases must be appropriately dissipated in a stabilized area. For additional information, see Section 5.f below.
Managing Waste	Concrete Waste & Wash Water	Per MVP-ES18 within the PSS&S, a suitable impervious geomembrane liner shall be placed at the location of the concrete washout with compost filter socks staked around the circumference of the liner so as to form a ring with the ends of the sock located at the upslope corner. Under no circumstances may wash water from concrete delivery vehicles be allowed to enter any surface water.
	Solid Waste	All solid waste and debris must be deposited in dumpsters and kept out of surface waters.
Other		

The following points serve as a reference; for additional information regarding reporting oil discharges/spills, refer to Appendix 9: SPCC.

a. Spills

Releases of sewage, industrial waste, other wastes, any noxious or deleterious substance or hazardous substance that are equal to or exceed the reportable quantity established under applicable federal or state law (40 CFR Part 110, 40 CFR Part 117, 40 CFR Part 302, or Va. Code §62.1-44.34:19), will be reported to the Department in accordance with Part III G. of the General Permit immediately upon discovery of the discharge, but no later than 24 hours after discovery. A reportable quantity of oil is defined by the EPA as a discharge to surface waters that causes a film, sheen, or discoloration of the surface of the water or adjoining shoreline or that causes sludge upon or emulsion deposits beneath the surface of the water or on adjacent shorelines. Reports will be made to the following:

1) Virginia DEQ Central Office

Phone: (804) 698-4000

For reports outside normal working hours, leave a message.

2) Virginia Department of Emergency Management

Emergency Operations Center (EOC)

Phone: 1-(800) 468-8892

Report in case of emergency.

Notification of any spills must be reported immediately to MVP's EI/LEI, construction spread PM and MVP's Environmental Coordinator. Notification to appropriate agencies will be made by MVP's environmental coordinator. Materials and equipment necessary for oil or chemical spill cleanup will be kept in the temporary material storage trailer onsite. Equipment will include, but not be limited to, brooms, dust pans, mops, rags, gloves, goggles, universal absorbents, sand, saw dust, and plastic and metal trash containers.

All oil or other chemical spills will be cleaned up immediately upon discovery. Spills of oil that cause a film, sheen, or discoloration or sludge or emulsion as described above will be reported to the National Response Center at 1-800-424-8802. If reaching the National Response Center is not practicable, the spill will be reported to the U.S. Coast Guard or EPA Predesignated On-Scene Coordinator for the geographic area where the spill occurs. Spills of oil from a facility of more than 1,000 gallons of oil in a single discharge or spills of oil from a facility of more than 42 gallons of oil in each of two discharges occurring within any twelve-month period must also be reported to the EPA Regional Administrator within 60 days from the time the facility becomes subject to 40 C.F.R. §112.4.

In the event of a hazardous spill or release contact: 9-1-1

Spills of hazardous substances equal to or above the reportable quantity for the substance within any 24-hour period will be reported to the appropriate federal agency, as soon as the

Lead Environmental Inspector has knowledge of the discharge, pursuant to procedures at 33 C.F.R. §153.203. Any personnel with knowledge of such a discharge shall immediately notify the Lead Environmental Inspector to allow for this reporting to occur.

Releases of hazardous substances equal to or above the reportable quantity for the substance within any 24-hour period will be reported immediately to the National Response Center at 1-800-424-8802 as soon as the Lead Environmental Inspector has knowledge of any release. Any personnel with knowledge of such a release shall immediately notify the Lead Environmental Inspector, MVP's construction spread PM and Environmental Coordinator. The MVP Environmental Coordinator will make all notifications to the appropriate agencies.

Other primary points of contact:

1) Brian Clauto – Senior Environmental Coordinator – EQT Corporation
Phone: (724) 873-3465 (o) or (412) 295-4184 (c)

2) MVP Personnel(s)* _____
Phone: _____

3) FERC Inspector(s)* _____
Phone: _____

4) DEQ Inspector(s)* _____
Phone: _____

*Contact information to be inserted by SWPPP Coordinator when information available.

b. Fuels and Oils

(i) The State Code of Virginia §62.1-44.34:19 states;

A. Any person discharging or causing or permitting a discharge of oil into or upon state waters, lands, or storm drain systems within the Commonwealth or discharging or causing or permitting a discharge of oil which may reasonably be expected to enter state waters, lands, or storm drain systems within the Commonwealth, and any operator of any facility, vehicle or vessel from which there is a discharge of oil into state waters, lands, or storm drain systems, or from which there is a discharge of oil which may reasonably be expected to enter state waters, lands, or storm drain systems, shall, immediately upon learning of the discharge, notify the Board, the director or coordinator of emergency services appointed pursuant to § 44-146.19 for the political subdivision in which the discharge occurs and any other political subdivision reasonably expected to be affected by the discharge, and appropriate federal authorities of such discharge. Notice will be deemed to have been given under this section for any discharge of oil to state lands in amounts less than twenty-five gallons if the recordkeeping requirements of subsection C of § 62.1-44.34:19. 2 have been met and the oil has been cleaned up in accordance with the requirements of this article.

B. Observations and data gathered as a result of the monthly and quarterly inspection activities required by § 62.1-44.34:15. 1 (1) (d) shall be maintained on site pursuant to § 62.1-44.34:19. 2, and compiled into a summary, on a form developed by the Board, such summary to be submitted to the Board annually on a schedule established by the Board. Should any such observations or data indicate the presence of petroleum hydrocarbons in ground water, the results shall be reported immediately to the Board and to the local director or coordinator of emergency services appointed pursuant to § 44-146.19.

- (ii) Any on-site storage tanks will have a means of secondary containment.
- (iii) All mobile equipment will have spill kits on board, be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage.
- (iv) Petroleum products will be stored in labeled, sealed containers.
- (v) Spill kits will be included with all fueling sources and maintenance activities.

c. Hazardous Substances and Toxic Chemicals

- (i) Spills or releases of hazardous substances that exceed the reportable quantity threshold must be reported as stated above in Section II.B.5.a. The EPA lists reportable quantity thresholds under 40 CFR part 117 and 40 CFR part 302.
- (ii) All paint containers and curing compounds will be tightly sealed and stored when not required for use. Excess paint will not be discharged to the storm sewers, but will be properly disposed according to the manufacturer's instructions. Spray guns will be cleaned on a removable tarp.
- (iii) Chemicals used on-site will be kept in small quantities and stored in closed containers under cover and kept out of direct contact with stormwater. As with fuels and oils, any inadvertent spills will be cleaned up immediately and disposed of according to federal, state, and local regulations.
- (iv) Fertilizers will be applied only in the minimum amounts recommended by the manufacturer.
- (v) Fertilizers will be worked into the soil to limit exposure to stormwater.
- (vi) Fertilizers will be stored under cover and partially used bags will be transferred to a sealable bin to avoid spills.

d. Sanitary Waste

Portable lavatories will be located on-site and serviced on a regular basis by a contractor. They will be located in upland areas away from direct contact with surface waters. Any

spills occurring during maintenance servicing will be cleaned up immediately, including any contaminated soils, and disposed of according to all federal, state, and local regulations.

e. Concrete

- (i) Concrete trucks will not be allowed to wash out or discharge surplus concrete or drum wash water on the site, except in a specially designated concrete washout area which contains a geomembrane and compost filter socks around the circumference. Refer to MVP-ES18 within the PSS&S for further information.
- (ii) Form release oil will be applied over a pallet covered with an absorbent material to collect excess fluid. The absorbent material will be replaced and disposed of properly when saturated.

f. Water Testing

When testing/cleaning of water supply lines, any uncontaminated discharge from the tested pipe will be collected and conveyed to a completed stormwater pipe system for ultimate discharge into a sedimentation basin or SWM/BMP facility or conveyed as sheet flow onto a stabilized area as necessary.

- g. Spill Reporting Forms and Guidelines for oil discharges/spills can be found in Appendix 9 – SPCC.

6) Receiving Waters

The receiving waters for the Laydown Yard 029 are Stony Creek (050500020305). The location can be found on USGS Quad maps and National Wetlands Inventory (NWI) maps within Appendix 10. The receiving waters for this project are not impaired for nitrogen, phosphorous, or sediment and do not trigger additional requirements outlined in the General Permit. However, these additional requirements are met or exceeded for the entire Project by the criteria implemented in the Plans and PSS&S. Factsheets for waters identified as impaired by other pollutants in the 2016 § 305(b)/303(d) Water Quality Assessment Integrated Report (along with any associated documentation) can be found in Appendix 10.

7) Total Maximum Daily Load (TMDL) Limitations & Impaired Waters

There is not a TMDL for the MVP-LY-029 site located in the Stony Creek Watershed however there is an impaired water classification for PCB in fish tissue. MVP has reviewed federal, state and local regulations applicable to the six (6) counties within the Project for impaired waterbodies that have an established Total Maximum Daily Loads (TMDL) for certain pollutants. The pollutants of potential concern are nutrients, including nitrogen and phosphorous (during post-construction), and sediment (during construction and post-construction).

8) Maintenance

Maintenance of the erosion and sediment controls and the stormwater management/BMP facilities incorporated into this project must be maintained on a regular basis to assure their continued effectiveness. This includes repairs to all erosion and sediment controls, including cleanout of all BMPs and stormwater management facilities at the required intervals. Critical areas, as described in more detail within Section II.C 1 – 6, pose additional installation and maintenance requirements which relate to landslide susceptible areas, steep slopes, and areas along the Project containing varying soil properties and erodibility factors. Those controls found to be ineffective during routine inspections (as described in the following section) shall be repaired before the next anticipated storm event or as soon as practicable. A more detailed description of the maintenance procedures is contained in the project design plans, General Details Set Narrative pages 1-4, and is incorporated in this Plan for reference.

9) Inspections

The Project will have one Lead Environmental Inspector (LEI) and at least one Environmental Inspector (EI) per construction spread. Inspection staff requirements will be determined by MVP based on the construction activities being undertaken and accessibility to the active areas while providing appropriate coverage to maintain environmental compliance. The LEI and EI will be required to be knowledgeable of environmental permit compliance requirements, be experienced in ESC and SWM BMP installation, operation and maintenance requirements, Project permit conditions and experienced with the FERC's Plan and Procedures. The LEI/EI will review the implementation of the Standards and Specifications and any applicable environmental permits, resolve apparent conflicts between permits and the PSS&S, and coordinate with the Construction Supervisor about additional measures which may be needed to address erosion and sedimentation. The LEI will also keep a daily log of activity documenting Project activities related to environmental permit compliance and corrective measures implemented, site visitors (i.e. non-project staff), waterbody and wetland crossing activity logs, and ESC installation and maintenance activities. The Lead Environmental Inspector, Environmental Inspector, Qualified Personnel and delegation of authority will be identified and appropriate contact information will be included in the SWPPP prior to or during the preconstruction meeting.

The Environmental inspection staff's responsibilities include:

- Ensuring compliance with the requirements of PSS&S;
- Ensuring compliance with all other federal and state permitting conditions relating to environmental compliance related to ESC, SWM, NWP12, VMRC and 401WQC;
- Ensuring compliance with the FERC's Plan and Procedures, the environmental conditions of the FERC's Certificate of Public Convenience and Necessity, the environmental mitigation measures proposed by MVP in the application submitted to FERC, and other environmental permits and approvals issued to MVP;
- Verifying that the limits of authorized construction work areas and locations of access roads are properly marked before clearing activities commence;

- Verifying the location of drainage and irrigation systems;
- Identifying stabilization needs in all areas;
- Locating dewatering structures and slope breakers to ensure they will not direct runoff into waterbodies or wetlands, known cultural resource sites or sensitive species habitat;
- Verifying that trench dewatering activities do not result in the deposition of sand, silt, and/or sediment near the point of discharge into a wetland or waterbody. If such deposition is discovered, the dewatering activity shall be stopped and the design of the discharge shall be changed to prevent reoccurrence;
- Testing subsoil and topsoil in agricultural and residential areas as necessary to measure compaction and determine the need for corrective action;
- Advising the Inspector when conditions (such as wet weather) make it advisable to restrict construction activities;
- Ensuring restoration of contours and topsoil;
- Approving imported soils for use in agricultural and residential areas;
- Ensuring that temporary erosion controls are properly installed, inspected and maintained;
- Inspecting temporary ESC measures and SWM BMPs:
 - Immediately following initial installation;
 - At least once every four business days
- Ensuring compliance with any more stringent plan requirements during construction activities within the Total Maximum Daily Loads (TMDL) watersheds of impaired waters located in Montgomery, Roanoke and Franklin Counties.
- Ensuring the repair of all ineffective temporary ESC measures within 24 hours of identification, or as soon as conditions allow if compliance with this time frame would result in greater environmental impacts;
- Keeping records of compliance with the environmental conditions, and the mitigation measures required by Federal or state environmental permits during active construction and restoration; and
- Establishing a program to monitor the success of restoration. Implementation of this program may be transferred to the company's operating section upon completion of construction and restoration activities.
- Daily monitoring and recording rainfall data for at least one on site rain gauge per spread.

MVP will provide weekly e-reporting to the VA DEQ linear projects inbox LinearProjects@deq.gov, which will then be directed to the appropriate VA DEQ representatives and/or applicable regional office. Inspection reports will be submitted based on MVP's construction spread break basis and identified as such. MVP intends to utilize four (4) construction spreads for Project construction activities in the Commonwealth. Weekly reports will be submitted the week following the inspections and will include the weekly inspection report per spread as well as the post-rainfall event inspections that occur during the reporting week. The reports shall include the following:

- Inspection reports;
- Pictures;
- Complaint logs and complaint responses; and

- Other compliance documents.

The name, phone number, and qualifications of the qualified personnel conducting inspections required by the General Permit can be found in the Record of Inspector Certification document within Appendix 5.

If, as a result of the inspection, the site conditions and/or control measures are found to have changed, the Plan shall be updated within a period of 7 calendar days. If control measures need to be modified to assure effectiveness or if additional measures are determined to be necessary, implementation shall be completed prior to the next anticipated storm event or as soon as practicable. The operator shall implement any corrective action(s) identified as a result of an inspection as soon as practicable but no later than 7 days after discovery or a longer period as approved by DEQ.

A report summarizing the inspections and the subsequent maintenance activities must be completed and maintained as part of the Plan. The inspection forms are included in Appendix 3. Required elements include major observations (including information on control measure performance and incidents of non-compliance), and information on the inspecting personnel. If an inspection does not identify any incidents of non-compliance, then the certification statement contained in the inspection form will apply. The inspection report(s) and any actions taken in accordance with Part II must be retained by the operator as part of the SWPPP for at least three years from the date the project is complete.

The Project will have a FERC third-party inspector as required. This inspector will have peer status with all other activity inspectors and shall have the authority to stop activities that violate the environmental conditions of the FERC certificate or other authorizations and order corrective action once approval has been granted by the MVP Project Manager.

C) *Critical Areas and Components*

Critical areas throughout the project will be treated as described below.

Note: Not all critical areas described within this section and corresponding sections of the appendices exist within Laydown Yard 029.

1) Soil Segregation and Stabilization

a. Topsoil Segregation

Topsoil will be segregated in all approved areas of the Project including pastureland, upland forested areas, residential areas, meadowlands, wetlands without standing water or saturated soil, areas requested by the landowner, or where directed by the Environmental Inspector. The topsoil will be stored separately from trench subsoil and replaced on top of the subgrade during final grading in preparation of restoration.

Topsoil will be stored along the edge of the temporary LOD, maintaining a 10-foot setback from both waterbody and wetland boundaries. In non-saturated/non-standing water wetland areas, the top 12 inches of wetland soil will be segregated from the trench line during trenching activities to be used during restoration.

Topsoil will be stripped from the full ROW as required by DEQ. During construction, topsoil storage piles shall be stabilized or protected with sediment trapping measures. Within deep soil at least 12 inches of topsoil will be segregated. Where soils are shallow, every effort will be made to segregate the entire topsoil layer. In residential areas, topsoil replacement (i.e. importation of topsoil) is an acceptable alternative to topsoil segregation. Topsoil may not be used to fill sandbags or to pad the piping.

For further details on topsoil segregation, management, and replacement, Section 2.4.1 in the PSS&S and detail MVP-ES46.1 through MVP-ES 46.3 provide additional guidance.

After final grading of replaced topsoil occurs throughout Project areas, soil stabilization should occur within 7 days after grade is achieved. If portions of the Project area will not be restored to final grade, but expected to remain dormant for longer than 14 days, the area should be stabilized within 7 days. Further details on soil stabilization are provided below.

b. Temporary and Permanent Stabilization

i. Temporary Stabilization

Per the VESCH STD and SPEC 3.31 and the General Construction Sequence #11 in the Mountain Valley Pipeline Plan of Development, Temporary Stabilization needs to be applied for any of the following conditions:

- When a denuded area remains idle for more than 7 days;
- When an acceptable final grade cannot be achieved (e.g., during winter or early spring construction);
- When permanent seeding cannot be applied due to adverse soil and weather conditions.

ESC measures will be monitored and maintained until conditions improve and final cleanup can be completed in the next recommended planting window.

- Variance included within Plan Set
 - a) MVP proposed to utilize the VESCH standard 3.31 Temporary Seeding mix during project activities with the addition of Browntop millet (*Panicum Ramosum*) to match the temporary seed mix required by the United States Forest Service (USFS) for use on Jefferson National Forest Lands.
 - b) The temporary seeding proposed for use on the project are presented in PSS&S Appendix A, MVP typical construction detail MVP-ES11.10 and included in the general details.

ii. Permanent Stabilization

Per the VESCH STD and SPEC 3.32, all disturbed soils will be stabilized within 7 days of final grading, weather and soil conditions permitting. Permanent vegetation shall not be

considered established until a ground cover is achieved that is uniform, mature enough to survive and will inhibit erosion. Reseeding will be performed until this is accomplished. For permanent stabilization, the recommended seed application rate will be doubled to ensure adequate final stabilization of the appropriate species.

c. Immediate Stabilization

The following need to be immediately stabilized per the Minimum Standards and Specifications of the Virginia Erosion and Sediment Control Handbook and Virginia Regulations 9VAC25-840 Erosion and Sediment Control Regulations:

- Slopes greater than 33%
- Earthen structures such as dams, dikes and diversions
- Water Bars
- The bed and banks of a watercourse after work within the watercourse is complete
- Sediment traps and basins
- Areas disturbed during the removal of the erosion controls (per the ESC Narrative)
- Areas that will be dormant for more than one year (per the General Construction Sequence)

i. Stream Bank Stabilization

- a. Permanent stabilization shall occur immediately upon installation, backfilling, and grading at each stream crossing;
- b. Stream banks will be restored by vegetative stabilization (VESCH STD & SPEC 3.22) where site conditions warrant, or by riprap (VESCH STD & SPEC 3.19) where bank slopes are 3h:1v or steeper;
- c. Soil Stabilization Blankets & Matting needs to be installed per the VESCH STD & SPEC 3.36, as well as hydraulically applied soil stabilization blankets and matting such as Earthguard, Flexterra, or equivalent (see details MVP-ES40 and MVP-ES40.1);
- d. Vegetative Streambank Stabilization (VESCH STD & SPEC 3.22).

ii. Wetlands

The success of wetland revegetation will be monitored in accordance with the Federal Energy Regulatory Commission (FERC) Plan and Procedures as well as any other applicable requirements from the U.S. Army Corp of Engineers. Restoration and post construction monitoring will need to follow the requirements outlined by FERC.

Additionally, all Right-of-Ways (ROW) will be restored to pre-development conditions per the Erosion and Sediment Control Narrative.

d. Mulching

Following seed application, mulch will be applied immediately. Mulch shall be used in conjunction with temporary seeding operations as specified in VESCH STD and Spec 3.31. Mulch can consist of straw, erosion control fabric, or some functional equivalent. Mulch will

be free of noxious weeds. Hay shall not be used as mulch. Mulch and related materials need to be applied in accordance with VESCH STD 3.35.

- i. Mulch will be spread uniformly over the area to cover at least 75 percent of the ground surface at a rate of 2 tons/acre of straw or its equivalent as required by the United States Forest Service
 - ii. If wood chips are used as mulch, the application rate will not exceed 6 tons/acre and the equivalent of 12 lbs./acre available nitrogen per ton will be added per VESCH Table 3.35-A
 - iii. Application of liquid mulch binders and tackifiers may be used in place of mechanical crimping/anchoring
 - a. Heaviest application will occur on crest of ridges and steep slope areas (including spoil piles) to prevent mulch displacement
 - b. Mulch application will be monitored and function throughout the Project duration
 - c. If mulch coverage is determined to be sparse due to wind or other factors, reapplication will be conducted as needed
 - iv. Mulch will be anchored to minimize loss by wind and water
 - a. When anchoring by mechanical means, a mulch-anchoring tool will be used to properly crimp the mulch to a depth of 2 to 3 inches
 - b. When anchoring with liquid mulch binders, rates recommended by the manufacturer will be used
 - c. Liquid mulch binders will not be used within 100 feet of wetlands or water bodies
 - v. Compost Filter Socks
 - a. Following determination that the site has achieved vegetative stabilization, the compost filter sock will be “opened” and the mulch contained within will be spread within the limits of disturbance per the Construction Sequence.
- e. Installation and Seed Mixes
- i. Seedbed Preparation
 - a. If tilling cannot be accomplished, one of the following steps must be done per the MVP PSS&S:
 - Adding of lime and fertilizer (per VESCH Table 3.31-A requirements)
 - Disking the top 4-6 inches of the soil
 - Soil roughening
 - b. When hydro seeding is to be used, the seedbed will be scarified to facilitate lodging and germination of the seed
 - c. Unless site-specific recommendations are received from the land owners or land management agencies, MVP will incorporate 4,000 lbs./acre of pulverized agricultural grade lime and 1,000 lbs./acre of 10-20-10 fertilizer into the soil
 - d. Soil pH modifier and fertilizer will be incorporated into the top two (2) inches of soil as soon as possible after application
 - e. Other fertilizer formulations, including slow-release sources of nitrogen (preferred from a water quality standpoint), may be used provided they can supply the same amounts and proportions of plant nutrients)

- f. PCB-free hydro seed will be used if available
- ii. Installation of Saplings
 - a. If saplings are required to be planted within the temporary ROW areas, this will be conducted in accordance with Section 2.9.6 – Bare Root Seeding Sapling and Shrub Planting (see Appendix A – STD & SPEC: Plates 3.37-4, 3.38-8, and 3.38-9) unless otherwise specified by applicable permit conditions. See also MVP-ES47 for bare root sapling and shrub planting details.
- iii. Erosion Control Fabric
 - a. Jute thatching or bonded fiber blankets, at a minimum, will be installed on waterbody banks at the time of final bank re-contouring
 - b. The erosion control fabric will be anchored with staples or other appropriate devices
 - c. Fiber matrix or polyacrylamide based erosion control products (see details MVP-ES40 and MVP-ES40-1) may be substituted for erosion control blanket in agricultural areas
- iv. Bare Root Sapling and Shrub Planting
 - a. Planting of bare-root saplings and shrubs will occur within select areas of the Project (see details MVP-ES11.8 and MVP-ES11.9). The purpose of these plantings is to establish target native tree species comparable to the region, site characteristics (e.g., topography; soil characteristics; adjacent vegetation), and adjacent forest composition in order to encourage the timely reestablishment of habitat removed during Project construction.
- v. General Seed Mixes
 - a. Seed mixes are summarized in details MVP-ES11.1 through 11.5. In areas where a specific mitigation seed mix is not required, the contractor will implement VESCH STD & SPEC 3.32 Table 3.32-C (Site Specific Seeding Mixtures for Appalachian/Mountain Area).
- vi. Seeding Rates
 - a. These will be based on pure live seed and used within 12 months of seed testing.
 - b. Seed will be uniformly applied using a broadcast seeder, drill, culti-packer seeder or hydroseeder.
 - c. When dry seeding, the seeding depth should be ¼ to ½ inch. Twice the supplier's recommended rate of inoculant will be used on dry seeding, five times the recommended rate if hydroseeded.
 - d. During hydroseeding, it is recommended to add 50% more seed to the tank if a machinery breakdown occurs (If the breakdown exceeds two (2) hours, a full rate of new seed may be necessary).
 - e. Asphalt binders will not be used when hydroseeding near wetlands or water bodies
 - f. The upland seed mix should not be applied within wetlands boundaries.

- g. Seeding and mulching in cultivated cropland will conform to the adjacent off ROW area unless otherwise requested by the landowner in writing.
 - h. For temporary and permanent stabilization measures, the recommended seed application rate will be doubled to ensure adequate stabilization.
- vii. Seeding of Permanent Vegetation
- a. Seeding will be performed within the recommended seeding dates in the VESCH. If seeding cannot be done within those dates, appropriate temporary erosion control measures will be used and seeding of permanent vegetation will be performed at the beginning of the next recommended seeding season
 - b. Permanent seed may be applied out of the recommended window in addition to temporary seeding; however, the contractor must be prepared to return during the next recommended seeding window to reseed any areas that did not develop adequate permanent cover. Lawns may be seeded on a schedule established with the landowner.
- viii. Low-Maintenance Seed Mix
- a. VESCH STD & SPEC 3.32 Table 3.32-C will be the default unless otherwise specified in the applicable permit conditions, mitigation specifications or landowner agreements
 - b. Certified seed will be used whenever possible, and will be applied to the ROW within 12 months of the testing date
 - c. Legume seed will be treated with an inoculant specific to the species

For additional details, please refer to Appendix C of the PSS&S, which provides guidelines for seed mixes and erosion control seeding techniques to be used in reclamation and restoration of disturbed soils associated with pipeline installations and repairs/maintenance on the Monongahela and George Washington-Jefferson National Forests.

2) Waters of the United States

To minimize impacts to waterbody and wetland crossings, they will be treated as separate construction entities, except during clearing activities. Additionally, efforts will be made to cross these areas during low flow conditions. The Environmental Inspector for each specified waterbody crossing will maintain a copy of the SWPPP which will document crossing details. At each wetland/waterbody crossing, a PVC pipe (or equivalent) will be stationed containing the permit, approvals, and wetland crossing details/plans. Once grubbing and grading starts at a waterbody or wetland crossing it will be actively conducted for consecutive days until the crossing is completed and the work area restored. Crossings will be constructed as close to perpendicular to the axis of the waterbody channel as engineering and routing conditions permit. If the pipeline parallels a waterbody, at least 15 feet of undisturbed vegetation will be maintained between the waterbody and the right-of-way, if possible, except at the crossing location. Where waterbodies meander or have multiple channels, the pipeline will be routed to minimize the number of waterbody crossings. A more detailed overview of crossing procedures for both wetlands and waterbodies is described below.

Staging areas for waterbody and wetland crossings will be located outside the buffer areas and will be the minimum necessary to stage the waterbody or wetland crossing. No refueling, hazardous materials storage, equipment maintenance, or equipment parking will take place within 100 feet of the waterbody or wetland crossing. If pumps are being used within the waterbody or wetland crossing, small quantities of fuel in Jerry cans may be stored on site within a spill containment device, otherwise fuel may not be stored within waterbody and wetland crossings. Equipment and vehicles will not be washed in any waterways. The LEI/EI will specify additional stabilization measures as needed to prevent equipment from rutting within waterbody and wetland crossings.

a. Wetland Crossings

Wetland crossings will be constructed using standard trench-and-backfill methods. Heavy equipment working in wetlands will utilize equipment mats or other suitable methods, such as timber rip rap, to minimize soil disturbance and compaction. Clearing activities within wetland areas will be restricted to the 75-foot temporary construction LOD. Trees located within 15 feet of the pipeline with roots that could compromise the integrity of the pipeline coating may be selectively cut and removed from the permanent ROW.

b. Waterbody Crossings

Per MS-13, when a live waterbody must be crossed by construction vehicles more than twice in a 6-month period, a temporary stream crossing of non-erodible material must be provided. The principal methods of crossing waterbodies in the Commonwealth will be open-cut dry-ditch. These methods include Flume Pipe Crossing, Cofferdam Crossing, and Dam and Pump. Though these serve as the principal methods of crossing waterbodies, Stony Creek will be crossed via conventional boring methods. In this event, the crossing will be conducted in accordance with details of all federal and state permitting requirements.

Although generalized construction sequences are provided in Section 2.0 for stream and wetland crossings, and a generalized list of procedures that will be followed at stream crossings is provided in Section 3.3 of the PSS&S, procedures of special emphasis are discussed in more detail below. The methods described below will be employed unless incompatible or more stringent requirements are imposed by the U.S. Army Corps of Engineers (USACE), DEQ, Virginia Marine Resources Commission (VMRC), or other appropriate federal or state authority.

c. Crossing Methods

i. Flume Pipe Crossing

If a flume crossing is planned, the flume to carry the stream flow across the ditch may be installed during the grubbing/grading phase. Trench excavation, pipeline installation, backfilling, and stabilization processes will be completed within a 72-hour period from flume installation to stabilization of the stream bank. The flume crossing method requires implementation of the following steps:

- a. Install flume pipe after blasting (if necessary), but before trenching;

- b. Use sand bag or sand bag/plastic sheeting diversion structure or equivalent to develop an effective seal and to divert stream flow through the flume pipe (some modifications to the stream bottom may be required to achieve an effective seal);
- c. Properly align flume pipe to prevent bank erosion and streambed scour;
- d. Do not remove flume pipe during trenching, pipe laying, or backfilling activities, or initial streambed restoration efforts; and
- e. Remove all flume pipes and dams that are not also part of the equipment bridge as soon as final cleanup of the streambed and bank are complete.

ii. Cofferdam

This procedure may be used for crossing channels 10 feet or wider, and involves constructing a cofferdam within the construction ROW (using cofferdam products) and enclosing approximately 60% of the streambed into a semi-circle.

- a. The cofferdam shall seal tightly to the streambed to minimize water from entering the construction area.
 - i. Utilize saddle bags filled with clean pea gravel or sand for pipe weights within waterbody or wetland crossings to ensure negative buoyancy.
- b. Pumps will be needed to dewater within the cofferdam excavation area.
- c. All earth disturbances will occur in the dry area behind the cofferdam.
- d. Once the pipe is installed, the excavated area will be backfilled and stabilized.
- e. Sediment barriers within the waterline should be in good working order before the cofferdam is removed.
- f. Stabilization will be with either rip rap or vegetation.
- g. The cofferdam is then set up from the opposite bank, extending far enough to include the tie-in point in the mid-stream area.
- h. Clean up and restoration of the excavated area follows the same procedures listed above.

iii. Dam and Pump

Dam and Pump method may be used without prior approval for crossings of waterbodies where pumps can adequately transfer streamflow volumes around the work area, and there are no concerns about sensitive species passage. Implementation of the dam-and-pump crossing method must meet the following performance criteria:

- a. Use sufficient pumps, including on-site backup pumps, to maintain downstream flows.
- b. Construct dams with materials that prevent sediment and other pollutants from entering the waterbody (e.g., sandbags or clean gravel with plastic liners)
- c. Screen pump intakes to minimize entrainment of fish
- d. Prevent streambed scour at pump discharge, and
- e. Continuously monitor the dam and pumps to ensure proper operation throughout the waterbody crossing.

iv. Equipment Bridges

For crossings of all state-designated fisheries as well as waterbodies with sensitive species concerns, all construction equipment will cross the waterbody on an equipment bridge. Only clearing equipment may cross waterbodies before installation of equipment bridges. The number of such crossings of each waterbody will be limited to one per piece of equipment.

For crossings of waterbodies greater than 10 feet in width, use of equipment operating in the waterbody will be limited to that needed to construct the crossing. All other construction equipment must cross on an equipment bridge. Equipment bridges will be used at all stream crossings. No fill or temporary culverts will be used to facilitate equipment bridges.

Soil will not be used to construct or stabilize equipment bridges, rather they will be constructed using one of the following methods:

- Equipment pads and culverts
- Flexi-float portable bridge(s)

Each equipment bridge will be designed and maintained to withstand and pass the highest flow that would occur while the bridge is in place and prevent soil from entering the waterbody. Equipment bridges will be removed following completion of restoration of the ROW unless it is authorized to remain as a permanent bridge. If there will be more than 30 days between final cleanup and the beginning of permanent seeding and reasonable alternative access to the right-of-way is available, equipment bridges will be removed as soon as possible after final cleanup.

v. Temporary Road Crossings

Temporary road crossings, consisting of bridges of timber mats and flume(s), will be installed to cross minor or intermediate streams. Timber mats shall be used to cross smaller streams where the span of the mat will stretch from bank to bank. Clean rock fill and flumed crossings will be utilized where it is not feasible to utilize timber mats. As an alternative, portable bridges may be used instead for small crossings. Equipment will not be allowed to ford flowing streams during construction activities. Temporary road crossings of streams must maintain adequate flow downstream.

All crossings of waterbodies (including minor water bodies, state designated fisheries, and waterbodies with sensitive species of concern) will be crossed with timber mats or temporary bridging (i.e. Bailey Bridges). A complete listing of the water body crossings is included on sheet 12.35ES of the Erosion and Sediment Control Plan and further details on the sequence of construction through waterbody crossings is described in more detail below.

d. Clearing

Waterbody and wetland crossings will be clearly marked in the field prior to the start of tree clearing activities. Care will be taken during clearing operations not to deposit mud in open water, and to minimize rutting of the right-of-way. All woody debris will be removed from within the waterbody or wetland crossing for disposal. Vegetation will be cut off at ground level, leaving existing root systems in place, and removed from the wetland for disposal. Timber riprap may be employed to stabilize the equipment work area provided all timber is obtained from within the approved construction work area. All timber riprap must be installed to facilitate removal upon completion of construction. Any disturbed soil will be mulched before the clearing crew leaves the waterbody or wetland crossing. The LOD at wetland crossings has been reduced from 125 feet to 75 feet to minimize impacts. Clearing activities within wetland areas will be restricted to the 75-foot temporary construction LOD.

Before grading begins and as grubbing progresses, sediment barriers (staked bales or silt fence, compost filter socks, etc.) will be installed across the construction area at the edge of the water or the edge of the wetland, and along the sides of the construction work area as needed to prevent the flow of spoil into the waterbody or wetland. Stump removal, topsoil segregation, and excavation would be limited to the area immediately over the trench line within the 50-foot permanent ROW easement per NWP12 Regional Condition 3.b.iii, FERC PROCEDURES and Project's FERC Certificate conditions. Trees located within 15 feet of the pipeline with roots that could compromise the integrity of the pipeline coating may be selectively cut and removed from the permanent ROW. A limited amount of stump removal and grading may be conducted within the permanent ROW easement in wetlands to ensure a safe working environment. In wetlands, very little grading is expected, as topography is generally flat and low-lying. Temporary ROW diversions (interceptor diversions) will be installed at the ends of the waterbody or wetland crossing.

e. Sediment Barriers

Sediment barriers will be installed across the entire construction right-of-way at all waterbody crossings. Sediment barriers will be properly maintained throughout construction and reinstalled as necessary (such as after backfilling of the trench) until replaced by permanent stormwater management controls or restoration of adjacent upland areas is complete. Where waterbodies are adjacent to the construction right-of-way, sediment barriers will be installed along the edge of the construction right-of-way as necessary to contain spoil and sediment within the ROW. Trench plugs will be used at all non-flumed waterbody crossings to prevent diversion of water into upland portions of the pipeline trench and to keep any accumulated trench water out of the waterbody. Trench plugs will be of sufficient size to withstand upslope water pressure.

Final grading will begin promptly after backfilling is completed. If final grade is reached on any portion of the site, vegetation will be applied within 7 days to prevent erosion. Disturbed areas will be restored to pre-construction contours, and in wetlands, the original topsoil will be applied preserving the native seed bank which will enable restoration with native plant species. Sediment barriers at the edge of the wetland or edge of the water will be repaired or replaced as necessary.

Permanent ROW diversions (interceptor diversions) will be installed at the edge of the 50-foot buffer area or base of the slope nearest the waterbody and wetland. All materials used to stabilize the equipment work area will be removed (e.g. timber riprap or timber mats). If soil and weather conditions prevent final grade to be established (e.g. if the permit specified a winter construction window), a temporary approximate grade will be established. ESC measures will be restored or replaced as needed, and temporary stabilization will be applied.

f. Restoration

Restoration will begin immediately after final grade is established. Stream banks will be restored by vegetative stabilization (VESCH STD & SPEC 3.22) where site conditions warrant. At stream crossings, woody stem vegetation reestablishment will be limited to the temporary right of way which will be about 12.5 feet on either side of the permanent ROW. Vegetative stabilization generally includes planting a perennial conservation seed mix from VESCH STD & SPEC 3.32 Table 3.32-B. If grubbing has not been extensive, then native shrub and tree species are expected to sprout and regenerate naturally. Seed will be applied before mulch is applied to the area. Rock, soil from outside the wetland, tree stumps, or brush riprap will not be used to stabilize the right-of-way in wetlands. A sediment barrier will be maintained at the edge of the water until revegetation is successful. Wetlands will be seeded in accordance with VESCH STD & SPEC 3.31 Table 3.31-B and mulched with clean straw. A sediment barrier will be maintained around the restored area until revegetation is successful. The buffers will be restored using the procedures for upland areas. For all affected forested wetlands, restoration activities will be conducted in accordance with the Project's approved permit conditions and mitigation requirements.

i. Restoration per FERC Procedures

- a) Use clean gravel or native cobbles for the upper 1 foot of trench backfill in all waterbodies that contain cold-water fisheries.
- b) For open-cut crossings, stabilize waterbody banks immediately and install temporary sediment barriers within 24 hours of completing instream construction activities. For dry-ditch crossings, complete streambed and bank stabilization before returning flow to the waterbody channel.
- c) Return all waterbody banks to preconstruction contours or to a stable angle of repose as approved by the Environmental Inspector.
- d) Install erosion control fabric or a functional equivalent on waterbody banks at the time of final bank recontouring. Do not use synthetic monofilament mesh/netted erosion control materials in areas designated as sensitive wildlife habitat unless the product is specifically designed to minimize harm to wildlife. Anchor erosion control fabric with staples or other appropriate devices.
- e) Application of riprap for bank stabilization must comply with COE, or its delegated agency, permit terms and conditions.
- f) Unless otherwise specified by state permit, limit the use of riprap to areas where flow conditions preclude effective vegetative stabilization techniques such as seeding and erosion control fabric.
- g) Revegetate disturbed riparian areas with native species of conservation grasses, legumes, and woody species, similar in density to adjacent undisturbed lands.

g. Post-Construction Maintenance

- i. No routine vegetation mowing or clearing will be conducted over the full width of the permanent ROW. However, to facilitate periodic corrosion/leak surveys, a corridor centered on the pipeline and up to 10 feet wide may be cleared at a frequency necessary to maintain the 10-foot corridor in an herbaceous state. In addition, trees that are located within 15 feet of the pipeline that have roots that could compromise the integrity of the pipeline coating may be cut and removed from the permanent right-of-way
- ii. Native herbaceous and woody shrub species are allowed to reestablish in the wetland ROW
- iii. Do not use herbicides or pesticides in or within 100 feet of a waterbody except as allowed by the appropriate land management or state agency
- iv. Time of Year Restrictions (TOYR) specified in section VII.A.5 of the Plan (April 15 – August 1 of any year) apply to routine mowing and clearing of riparian areas
- v. Monitor and record the success of wetland revegetation annually until wetland revegetation is successful.
- vi. Wetland revegetation shall be considered successful if all of the following criteria are satisfied:
 - a) the affected wetland satisfies the current federal definition for a wetland (i.e., soils, hydrology, and vegetation);
 - b) vegetation is at least 80 percent of either the cover documented for the wetland prior to construction, or at least 80 percent of the cover in adjacent wetland areas that were not disturbed by construction;
 - c) if natural rather than active revegetation was used, the plant species composition is consistent with early successional wetland plant communities in the affected ecoregion; and
 - d) invasive species and noxious weeds are absent, unless they are abundant in adjacent areas that were not disturbed by construction.
- vii. Within 3 years after construction, a report will be filed with the Secretary of FERC identifying the status of the wetland revegetation efforts and documenting success. The requirement to file wetland restoration reports with the Secretary does not apply to projects constructed under the automatic authorization, prior notice, or advance notice provisions in the FERC's regulations.
 - a) For any wetland where revegetation is not successful at the end of 3 years after construction, develop and implement (in consultation with a professional wetland ecologist) a remedial revegetation plan to actively revegetate wetlands. Continue revegetation efforts and file a report annually documenting progress in these wetlands until wetland revegetation is successful.
- viii. Per the Nationwide Permit of the Army Corps of Engineers Section 23 part (c)
 - a) Compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate or the adverse effects of the proposed activity are minimal, and provides a project-specific waiver of this requirement. For wetland losses of 1/10-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that

compensatory mitigation is required to ensure that the activity results in minimal adverse effects on the aquatic environment. Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of 33 CFR part 332.

- ix. Temporary Seeding
 - a) Unsaturated wetlands will be temporarily seeded in accordance with Typical Construction Detail MVP-ES11.4 (Appendix B) and mulched with clean straw (where required), then allowed to revegetate with native seedbank present in the segregated topsoil.
 - b) A sediment barrier will be maintained around the restored area until revegetation is successful.
- x. For wetlands that are saturated or have standing water present, use these guidelines as reference:
 - a) Topsoil segregation will be conducted to the extent practicable
 - b) Following installation of the pipeline, the trench will be backfilled using native wetland soils and restored to preexisting conditions.
 - c) No soil or rock will be imported for use during backfilling of the trench.
 - d) Temporary seed will be applied to wetland areas to temporarily stabilize the area while the native wetland seedbank reestablishes the area with native vegetation.
 - e) No seeding should be conducted in areas of standing water. The riparian buffers will be restored using the procedures discussed above for upland areas.
 - f) Installation of Saplings: If saplings are required to be planted within the temporary ROW areas, this will be conducted in accordance with Section 2.9.6 – Bare Root Seeding Sapling and Shrub Planting (see Appendix A – STD & SPEC: Plates 3.37-4, 3.38-8, and 3.38-9) unless otherwise specified by applicable permit conditions.

In addition to the above mentioned details, the reference materials relevant to wetlands and waterbodies along the Project are outlined below:

- Joint Permit Application (JPA) & Nationwide Permit 12 (NWP)—Approved December 26, 2017
 - Hydrostatic Testing Plan – Attachment B Section 4.0
 - Time of Year Restrictions – Attachment E Section 3.0
 - Project Construction Narratives – Attachment H-2 Section 2.0
 - Temporary Impact Restoration Narrative – Attachment H-2 Section 3.0
 - List of impacts with stream designation (Class V & VI) – Attachment H-2 Table 2.2
 - Plan views of all impacts—Attachment H-3
 - List of VMRC impacts with TOYR – Attachment H-5 Table 1
 - VMRC Crossing plan views and cross sections—Attachment H-5

3) Karst Terrain

Portions of the alignment are underlain by karst terrain, an environmentally sensitive landscape characterized by the presence of sinkholes, caverns, irregular pinnacled bedrock surface, and springs.

The nature of karst features to act as a conduit to the subterranean environment creates a distinct risk for groundwater contamination. Any known discharges (including, but not limited to, stormwater, sediment, pollutants, or hydrostatic testing water) to a karst feature should be reported to the MVP Karst Specialist(s) immediately. Contact information for the Karst Specialists assigned by MVP are listed in Appendix 4 of the SWPPP.

a. Guidance for Construction in Karst Terrain

Guidance and requirements for identifying and mitigating karst features and the associated potential hazards before and during construction of the project is provided in the PSS&S through the following appendices:

Appendix H: Karst Hazard Assessment

Appendix L: Karst Mitigation Plan

Karst features located within the secondary karst buffer (minimum ¼-mile) and construction easement (minimum 150-feet) of the proposed MVP alignment are summarized in Table 2 of the Karst Hazard Assessment, including description of the feature, potential impacts, and recommendations. For map sheets and location information on these features, see Figures 1 – 3 in Appendix A in the Karst Hazard Assessment.

b. Karst Terrain Specialists and Inspections

Where karst features occur in the limits of disturbance, Karst Specialists (KS) will be deployed to complete inspections prior to tree clearing or land disturbance, as well as during construction. Requirements for karst terrain inspections by the “KS team” area defined in Section 2.0 of the Karst Mitigation Plan, which also states that two or more KS will be available to conduct multiple inspections in karst terrain where construction crews may be working at different locations simultaneously.

c. Identifying Potential Karst Features

If observed in the LOD, the following may be indications of a karst feature, and should be inspected and documented by the Karst Specialist:

- i. Soil subsidence
- ii. Rock collapse
- iii. Sediment filling
- iv. Sinking streams or notable surface water infiltration
- v. Spring / seep / flooding

- vi. Cave or void space

Additional guidance for identification of suspected karst features can be found in the Karst Mitigation Plan: 3.0 Management of Newly Identified Karst Features.

d. Measures to Avoid Impacts

The required measures to avoid impacts to the karst aquifer and environment are outlined in the Karst Mitigation Plan. Per Section 4.4, the following general guidelines shall be adhered to for construction activity in karst terrain:

- i. Equipment shall not be parked or left idling for extended periods of time (more than 12 hours), or refueled or serviced within 100 feet of any karst feature.
- ii. Equipment refueling will not be performed within flagged or marked buffer areas of streambeds, sinkholes, fissures, or areas draining into these or other karst features, except by hand-carried cans (5-gallon maximum capacity) when necessary.
- iii. Equipment servicing and maintenance areas will be sited outside of flagged or marked buffer areas of streambeds, sinkholes, fissures, or areas draining into these or other karst features.
- iv. Equipment washing operations shall be located outside of the karst buffer area
- v. Hazardous materials, chemicals, fuels, lubricating oils, and petroleum products shall not be stored within 100 feet of any karst feature.
- vi. All equipment shall be checked by a construction inspector daily for leaks prior to beginning work in karst areas. If leaks or damaged/defective equipment are discovered, containment will be deployed immediately and the equipment repaired or removed.

e. Reportable Spills

If a reportable spill (as defined in 40 CFR Part 302) occurs within a karst feature or water body, refer to Section 3.1.3 of the MVP Spill Prevention, Control and Countermeasure (SPCC) Plan for required action and response.

4) Acid Soils

Areas of acid soils are known to occur within portions of the Project area in Virginia. In order to identify and mitigate potential impacts should these soils be encountered, an Acid Forming Materials (AFM) Identification and Testing Work Plan was developed for implementation during Project activities. The AFM Plan is provided in Appendix G of the PSS&S, under the Acid Forming Materials Mitigation Plan Standards and Specifications for Virginia.

Section 4.0 of the Mitigation Plan outlines the overall mitigation strategy, as well as the responsibilities of the Environmental Inspector (EI), who is tasked with identifying and evaluating risk in areas of potential AFM.

The Environmental Inspector must be familiar with the Mitigation Plan requirements, and be equipped to coordinate mitigation measures in the field, should AFM's be encountered. Field Testing methods to be used by the Environmental Inspector to identify AFM's are described in Section 3.0 of the Mitigation Plan.

Refer to Figures 1 – 3 of the Mitigation Plan for locations and descriptions of AFM's within the project alignment.

5) Time of Year Restrictions and Endangered and Threatened Species

If the below indicated species is present within the waterbody or adjacent area, no in-stream construction activities will be conducted during the following time windows unless written approval is received from the appropriate federal or state agency:

- a) Coldwater Fisheries – March 1 through June 30;
- b) Coolwater and Warmwater Fisheries – April 15 through July 15;
- c) Natural Trout Streams;
 - i. October 1 through March 31 (Brown Trout and Brook Trout)
 - ii. March 15 through May 15 (Rainbow Trout)
- d) Stockable Trout Streams – There is no time of year restrictions (TOYR) for stockable trout, however, as required by the VDGIF, VDGIF regional offices will be consulted before constructing in stockable trout streams;
- e) Roanoke Log Perch – March 15 through June 30
- f) Orange-fin Madtom – March 15 through May 31;
- g) Atlantic Pigtoe and James Spiny mussel – May 15 through July 31;
- h) Green Floater and Yellow Lampmussel – April 15 through June 15 and August 15 through September 30.

Refer to Appendix 10 for the Time of Year Restriction Table which identifies all stream crossings and correlating TOYR and endangered and threatened species (if applicable) within the Project area.

REFERENCES

Federal Energy Regulatory Commission, Office of Energy Projects, 2013. *Upland Erosion Control, Revegetation, and Maintenance Plan*.

Federal Energy Regulatory Commission, Office of Energy Projects, 2013. *Wetland and Waterbody Construction and Mitigation Procedures*.

Mountain Valley Pipeline, LLC. *Project Specific Standards and Specifications for Virginia*. June 2017.

U.S. Department of Environmental Quality. *Virginia Environmental Geographic Informational Systems: 2016 Impaired Waters Database GIS Applications*. Impaired waters data retrieved from http://www.deq.virginia.gov/mapper_ext/?service=public/2016_adb_anyuse

Virginia Department of Conservation and Recreation. *Virginia Erosion and Sediment Control Handbook*. Third Edition, 1992.

Virginia Department of Game and Inland Fisheries, Environmental Services Section. *Time of Year Restrictions (TOYR) and other Guidance*, 2017. Data retrieved from <http://www.dfig.virginia.gov/environmental-programs/environmental-services-section/>

\\Kent\wssi\Projects\22000s\22800\22865.01\Admin\09-COMP\Laydown Yard 029\SWPPP\SWPPP-LY-029 2018-05-18.docx

APPENDIX 1

Storm Water Construction General Permit No. VAR10

General VPDES Permit for Discharges of Stormwater from Construction Activities
General Permit No.: VAR10

As Mentioned on page 5 of the SWPPP, discharges of uncontaminated stormwater associated with the construction of natural gas transmission pipelines and certain associated facilities are not subject to a permitting requirement under the Clean Water Act, 33 U.S.C. § 1342(l)(2); 40 C.F.R. § 122.26(a)(2), or State Water Control Law, 9VAC25-870-380.A.2. For this reason, the Project will not be covered by the General VPDES Permit for Discharges of Stormwater from Construction Activities, 9VAC25-880-70 (General Permit).

Nevertheless, the State Water Control Law provides that projects covered under annual standards and specifications should be “consistent with” the General Permit, including its requirements for a SWPPP. Va. Code § 62.1-44.15:31. Accordingly, this Plan has been prepared to implement all relevant and applicable conditions of the General Permit. Relevant provisions of the General Permit are cited in this Plan where appropriate and are thereby incorporated by reference. The following is a complete list of incorporated provisions of the General Permit.

General Permit Part I, Sections B, C, D, E, & G
General Permit Part II Sections A1. d & e, A.2 –G
General Permit Part III Sections A-J, K.2-.4 L, & N-W



COMMONWEALTH of VIRGINIA
DEPARTMENT OF ENVIRONMENTAL QUALITY

General Permit No.: VAR10

Effective Date: July 1, 2014

Expiration Date: June 30, 2019

**GENERAL VPDES PERMIT FOR DISCHARGES OF STORMWATER FROM CONSTRUCTION
ACTIVITIES**

**AUTHORIZATION TO DISCHARGE UNDER THE VIRGINIA STORMWATER MANAGEMENT
PROGRAM AND THE VIRGINIA STORMWATER MANAGEMENT ACT**

In compliance with the provisions of the Clean Water Act, as amended, and pursuant to the Virginia Stormwater Management Act and regulations adopted pursuant thereto, operators of construction activities are authorized to discharge to surface waters within the boundaries of the Commonwealth of Virginia, except those specifically named in State Water Control Board regulations that prohibit such discharges.

The authorized discharge shall be in accordance with this cover page, Part I - Discharge Authorization and Special Conditions, Part II - Stormwater Pollution Prevention Plan, and Part III - Conditions Applicable to All VPDES Permits as set forth herein.

PART I

DISCHARGE AUTHORIZATION AND SPECIAL CONDITIONS

A. Coverage under this general permit.

1. During the period beginning with the date of coverage under this general permit and lasting until the general permit's expiration date, the operator is authorized to discharge stormwater from construction activities.
2. This general permit also authorizes stormwater discharges from support activities (e.g., concrete or asphalt batch plants, equipment staging yards, material storage areas, excavated material disposal areas, borrow areas) located on-site or off-site provided that:
 - a. The support activity is directly related to the construction activity that is required to have general permit coverage for discharges of stormwater from construction activities;
 - b. The support activity is not a commercial operation, nor does it serve multiple unrelated construction activities by different operators;
 - c. The support activity does not operate beyond the completion of the last construction activity it supports;
 - d. The support activity is identified in the registration statement at the time of general permit coverage;
 - e. Appropriate control measures are identified in a stormwater pollution prevention plan and implemented to address the discharges from the support activity areas; and
 - f. All applicable state, federal, and local approvals are obtained for the support activity.

B. Limitations on coverage.

1. Post-construction discharges. This general permit does not authorize stormwater discharges that originate from the site after construction activities have been completed and the site, including any support activity sites covered under the general permit registration, has undergone final stabilization. Post-construction industrial stormwater discharges may need to be covered by a separate VPDES permit.
2. Discharges mixed with nonstormwater. This general permit does not authorize discharges that are mixed with sources of nonstormwater, other than those discharges that are identified in Part I E (Authorized nonstormwater discharges) and are in compliance with this general permit.
3. Discharges covered by another state permit. This general permit does not authorize discharges of stormwater from construction activities that have been covered under an individual permit or required to obtain coverage under an alternative general permit.
4. Impaired waters and TMDL limitation. Discharges of stormwater from construction activities to surface waters identified as impaired in the 2012 § 305(b)/303(d) Water Quality Assessment Integrated Report or for which a TMDL wasteload allocation has been established and approved prior to the term of this general permit for (i) sediment or a sediment-related parameter (i.e., total suspended solids or turbidity) or (ii) nutrients (i.e., nitrogen or phosphorus) are not eligible for coverage under this general permit unless the operator develops, implements, and maintains a SWPPP that minimizes the pollutants of concern and, when applicable, is consistent with the assumptions and requirements of the approved TMDL wasteload allocations. In addition, the operator shall implement the following items:

- a. The impaired water(s), approved TMDL(s), and pollutant(s) of concern, when applicable, shall be identified in the SWPPP;
 - b. Permanent or temporary soil stabilization shall be applied to denuded areas within seven days after final grade is reached on any portion of the site;
 - c. Nutrients shall be applied in accordance with manufacturer's recommendations or an approved nutrient management plan and shall not be applied during rainfall events; and
 - d. The applicable SWPPP inspection requirements specified in Part II F 2 shall be amended as follows:
 - (1) Inspections shall be conducted at a frequency of (i) at least once every four business days or (ii) at least once every five business days and no later than 48 hours following a measurable storm event. In the event that a measurable storm event occurs when there are more than 48 hours between business days, the inspection shall be conducted on the next business day; and
 - (2) Representative inspections used by utility line installation, pipeline construction, or other similar linear construction activities shall inspect all outfalls discharging to surface waters identified as impaired or for which a TMDL wasteload allocation has been established and approved prior to the term of this general permit.
5. Exceptional waters limitation. Discharges of stormwater from construction activities not previously covered under the general permit issued in 2009 to exceptional waters identified in 9VAC25-260-30 A 3 c are not eligible for coverage under this general permit unless the operator implements the following:
- a. The exceptional water(s) shall be identified in the SWPPP;
 - b. Permanent or temporary soil stabilization shall be applied to denuded areas within seven days after final grade is reached on any portion of the site;
 - c. Nutrients shall be applied in accordance with manufacturer's recommendations or an approved nutrient management plan and shall not be applied during rainfall events; and
 - d. The applicable SWPPP inspection requirements specified in Part II F 2 shall be amended as follows:
 - (1) Inspections shall be conducted at a frequency of (i) at least once every four business days or (ii) at least once every five business days and no later than 48 hours following a measurable storm event. In the event that a measurable storm event occurs when there are more than 48 hours between business days, the inspection shall be conducted on the next business day; and
 - (2) Representative inspections used by utility line installation, pipeline construction, or other similar linear construction activities shall inspect all outfalls discharging to exceptional waters.
6. There shall be no discharge of floating solids or visible foam in other than trace amounts.
- C. Commingled discharges. Discharges authorized by this general permit may be commingled with other sources of stormwater that are not required to be covered under a state permit, so long as the commingled discharge is in compliance with this general permit. Discharges authorized by a separate state or VPDES permit may be commingled with discharges authorized by this general permit so long as all such discharges comply with all applicable state and VPDES permit requirements.

D. Prohibition of nonstormwater discharges. Except as provided in Parts I A 2, I C, and I E, all discharges covered by this general permit shall be composed entirely of stormwater associated with construction activities. All other discharges including the following are prohibited:

1. Wastewater from washout of concrete;
2. Wastewater from the washout and cleanout of stucco, paint, form release oils, curing compounds, and other construction materials;
3. Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance;
4. Oils, toxic substances, or hazardous substances from spills or other releases; and
5. Soaps, solvents, or detergents used in equipment and vehicle washing.

E. Authorized nonstormwater discharges. The following nonstormwater discharges from construction activities are authorized by this general permit when discharged in compliance with this general permit:

1. Discharges from firefighting activities;
2. Fire hydrant flushings;
3. Waters used to wash vehicles or equipment where soaps, solvents, or detergents have not been used and the wash water has been filtered, settled, or similarly treated prior to discharge;
4. Water used to control dust that has been filtered, settled, or similarly treated prior to discharge;
5. Potable water sources, including uncontaminated waterline flushings;
6. Routine external building wash down where soaps, solvents or detergents have not been used and the wash water has been filtered, settled, or similarly treated prior to discharge;
7. Pavement wash waters where spills or leaks of toxic or hazardous materials have not occurred (or where all spilled or leaked material has been removed prior to washing); where soaps, solvents, or detergents have not been used; and where the wash water has been filtered, settled, or similarly treated prior to discharge;
8. Uncontaminated air conditioning or compressor condensate;
9. Uncontaminated ground water or spring water;
10. Foundation or footing drains where flows are not contaminated with process materials such as solvents;
11. Uncontaminated excavation dewatering, including dewatering of trenches and excavations that have been filtered, settled, or similarly treated prior to discharge; and
12. Landscape irrigation.

F. Termination of general permit coverage.

1. The operator of the construction activity shall submit a notice of termination in accordance with 9VAC25-880-60 to the VSMP authority after one or more of the following conditions have been met:

- a. Necessary permanent control measures included in the SWPPP for the site are in place and functioning effectively and final stabilization has been achieved on all portions of the site for which the operator is responsible. When applicable, long term responsibility and maintenance requirements shall be recorded in the local land records prior to the submission of a notice of termination;
 - b. Another operator has assumed control over all areas of the site that have not been finally stabilized and obtained coverage for the ongoing discharge;
 - c. Coverage under an alternative VPDES or state permit has been obtained; or
 - d. For residential construction only, temporary soil stabilization has been completed and the residence has been transferred to the homeowner.
2. The notice of termination should be submitted no later than 30 days after one of the above conditions in subdivision 1 of this subsection is met. Authorization to discharge terminates at midnight on the date that the notice of termination is submitted for the conditions set forth in subdivisions 1 b through 1 d of this subsection. Termination of authorizations to discharge for the conditions set forth in subdivision 1 a of this subsection shall be effective upon notification from the department that the provisions of subdivision 1 a of this subsection have been met or 60 days after submittal of the notice of termination, whichever occurs first.
 3. The notice of termination shall be signed in accordance with Part III K of this general permit.

G. Water quality protection.

1. The operator must select, install, implement and maintain control measures as identified in the SWPPP at the construction site that minimize pollutants in the discharge as necessary to ensure that the operator's discharge does not cause or contribute to an excursion above any applicable water quality standard.
2. If it is determined by the department that the operator's discharges are causing, have reasonable potential to cause, or are contributing to an excursion above any applicable water quality standard, the department, in consultation with the VSMP authority, may take appropriate enforcement action and require the operator to:
 - a. Modify or implement additional control measures in accordance with Part II B to adequately address the identified water quality concerns;
 - b. Submit valid and verifiable data and information that are representative of ambient conditions and indicate that the receiving water is attaining water quality standards; or
 - c. Submit an individual permit application in accordance with 9VAC25-870-410 B 3.

All written responses required under this chapter must include a signed certification consistent with Part III K.

PART II

STORMWATER POLLUTION PREVENTION PLAN

A stormwater pollution prevention plan (SWPPP) shall be developed prior to the submission of a registration statement and implemented for the construction activity, including any support activity, covered by this general permit. SWPPPs shall be prepared in accordance with good engineering practices. Construction activities that are part of a larger common plan of development or sale and disturb less than one acre may utilize a SWPPP template provided by the department and need not provide a separate stormwater management plan if one has been prepared and implemented for the larger common plan of development or sale.

The SWPPP requirements of this general permit may be fulfilled by incorporating by reference other plans such as a spill prevention control and countermeasure (SPCC) plan developed for the site under § 311 of the federal Clean Water Act or best management practices (BMP) programs otherwise required for the facility provided that the incorporated plan meets or exceeds the SWPPP requirements of Part II A. All plans incorporated by reference into the SWPPP become enforceable under this general permit. If a plan incorporated by reference does not contain all of the required elements of the SWPPP, the operator must develop the missing elements and include them in the SWPPP.

Any operator that was authorized to discharge under the general permit issued in 2009, and that intends to continue coverage under this general permit, shall update its stormwater pollution prevention plan to comply with the requirements of this general permit no later than 60 days after the date of coverage under this general permit.

A. Stormwater pollution prevention plan contents. The SWPPP shall include the following items:

1. General information.

- a. A signed copy of the registration statement, if required, for coverage under the general VPDES permit for discharges of stormwater from construction activities;
- b. Upon receipt, a copy of the notice of coverage under the general VPDES permit for discharges of stormwater from construction activities (i.e., notice of coverage letter);
- c. Upon receipt, a copy of the general VPDES permit for discharges of stormwater from construction activities;
- d. A narrative description of the nature of the construction activity, including the function of the project (e.g., low density residential, shopping mall, highway, etc.);
- e. A legible site plan identifying:
 - (1) Directions of stormwater flow and approximate slopes anticipated after major grading activities;
 - (2) Limits of land disturbance including steep slopes and natural buffers around surface waters that will not be disturbed;
 - (3) Locations of major structural and nonstructural control measures, including sediment basins and traps, perimeter dikes, sediment barriers, and other measures intended to filter, settle, or similarly treat sediment, that will be installed between disturbed areas and the undisturbed vegetated areas in order to increase sediment removal and maximize stormwater infiltration;
 - (4) Locations of surface waters;

- (5) Locations where concentrated stormwater is discharged;
- (6) Locations of support activities, when applicable and when required by the VSMP authority, including but not limited to (i) areas where equipment and vehicle washing, wheel wash water, and other wash water is to occur; (ii) storage areas for chemicals such as acids, fuels, fertilizers, and other lawn care chemicals; (iii) concrete wash out areas; (iv) vehicle fueling and maintenance areas; (v) sanitary waste facilities, including those temporarily placed on the construction site; and (vi) construction waste storage; and
- (7) When applicable, the location of the on-site rain gauge or the methodology established in consultation with the VSMP authority used to identify measurable storm events for inspection purposes.

2. Erosion and sediment control plan.

- a. An erosion and sediment control plan approved by the VESCP authority as authorized under the Erosion and Sediment Control Regulations (9VAC25-840), an "agreement in lieu of a plan" as defined in 9VAC25-840-10 from the VESCP authority, or an erosion and sediment control plan prepared in accordance with annual standards and specifications approved by the department. Any operator proposing a new stormwater discharge from construction activities that is not required to obtain erosion and sediment control plan approval from a VESCP authority or does not adopt department-approved annual standards and specifications shall submit the erosion and sediment control plan to the department for review and approval.
- b. All erosion and sediment control plans shall include a statement describing the maintenance responsibilities required for the erosion and sediment controls used.
- c. A properly implemented approved erosion and sediment control plan, "agreement in lieu of a plan," or erosion and sediment control plan prepared in accordance with department-approved annual standards and specifications, adequately:
 - (1) Controls the volume and velocity of stormwater runoff within the site to minimize soil erosion;
 - (2) Controls stormwater discharges, including peak flow rates and total stormwater volume, to minimize erosion at outlets and to minimize downstream channel and stream bank erosion;
 - (3) Minimizes the amount of soil exposed during the construction activity;
 - (4) Minimizes the disturbance of steep slopes;
 - (5) Minimizes sediment discharges from the site in a manner that addresses (i) the amount, frequency, intensity, and duration of precipitation; (ii) the nature of resulting stormwater runoff; and (iii) soil characteristics, including the range of soil particle sizes present on the site;
 - (6) Provides and maintains natural buffers around surface waters, directs stormwater to vegetated areas to increase sediment removal, and maximizes stormwater infiltration, unless infeasible;
 - (7) Minimizes soil compaction and, unless infeasible, preserves topsoil;
 - (8) Ensures that stabilization of disturbed areas will be initiated immediately whenever any clearing, grading, excavating, or other land-disturbing activities have permanently ceased on any portion of the site, or temporarily ceased on any portion of the site and will not resume for a period exceeding 14 days; and

- (9) Utilizes outlet structures that withdraw stormwater from the surface (i.e., above the permanent pool or wet storage water surface elevation), unless infeasible, when discharging from sediment basins or sediment traps.

3. Stormwater management plan.

- a. New construction activities. A stormwater management plan approved by the VSMP authority as authorized under the Virginia Stormwater Management Program (VSMP) Regulation (9VAC25-870), or an "agreement in lieu of a stormwater management plan" as defined in 9VAC25-870-10 from the VSMP authority, or a stormwater management plan prepared in accordance with annual standards and specifications approved by the department. Any operator proposing a new stormwater discharge from construction activities that is not required to obtain stormwater management plan approval from a VSMP authority or does not adopt department-approved annual standards and specifications shall submit the stormwater management plan to the department for review and approval.
 - b. Existing construction activities. Any operator that was authorized to discharge under the general permit issued in 2009, and that intends to continue coverage under this general permit, shall ensure compliance with the requirements of 9VAC25-870-93 through 9VAC25-870-99 of the VSMP Regulation, including but not limited to the water quality and quantity requirements. The SWPPP shall include a description of, and all necessary calculations supporting, all post-construction stormwater management measures that will be installed prior to the completion of the construction process to control pollutants in stormwater discharges after construction operations have been completed. Structural measures should be placed on upland soils to the degree possible. Such measures must be designed and installed in accordance with applicable VESCP authority, VSMP authority, state, and federal requirements, and any necessary permits must be obtained.
4. Pollution prevention plan. A pollution prevention plan that addresses potential pollutant-generating activities that may reasonably be expected to affect the quality of stormwater discharges from the construction activity, including any support activity. The pollution prevention plan shall:
- a. Identify the potential pollutant-generating activities and the pollutant that is expected to be exposed to stormwater;
 - b. Describe the location where the potential pollutant-generating activities will occur, or if identified on the site plan, reference the site plan;
 - c. Identify all nonstormwater discharges, as authorized in Part I E of this general permit, that are or will be commingled with stormwater discharges from the construction activity, including any applicable support activity;
 - d. Identify the person responsible for implementing the pollution prevention practice or practices for each pollutant-generating activity (if other than the person listed as the qualified personnel);
 - e. Describe the pollution prevention practices and procedures that will be implemented to:
 - (1) Prevent and respond to leaks, spills, and other releases including (i) procedures for expeditiously stopping, containing, and cleaning up spills, leaks, and other releases; and (ii) procedures for reporting leaks, spills, and other releases in accordance with Part III G;
 - (2) Prevent the discharge of spilled and leaked fuels and chemicals from vehicle fueling and maintenance activities (e.g., providing secondary containment such as spill berms, decks, spill containment pallets, providing cover where appropriate, and having spill kits readily available);

- (3) Prevent the discharge of soaps, solvents, detergents, and wash water from construction materials, including the clean-up of stucco, paint, form release oils, and curing compounds (e.g., providing (i) cover (e.g., plastic sheeting or temporary roofs) to prevent contact with stormwater; (ii) collection and proper disposal in a manner to prevent contact with stormwater; and (iii) a similarly effective means designed to prevent discharge of these pollutants);
 - (4) Minimize the discharge of pollutants from vehicle and equipment washing, wheel wash water, and other types of washing (e.g., locating activities away from surface waters and stormwater inlets or conveyance and directing wash waters to sediment basins or traps, using filtration devices such as filter bags or sand filters, or using similarly effective controls);
 - (5) Direct concrete wash water into a leak-proof container or leak-proof settling basin. The container or basin shall be designed so that no overflows can occur due to inadequate sizing or precipitation. Hardened concrete wastes shall be removed and disposed of in a manner consistent with the handling of other construction wastes. Liquid concrete wastes shall be removed and disposed of in a manner consistent with the handling of other construction wash waters and shall not be discharged to surface waters;
 - (6) Minimize the discharge of pollutants from storage, handling, and disposal of construction products, materials, and wastes including (i) building products such as asphalt sealants, copper flashing, roofing materials, adhesives, and concrete admixtures; (ii) pesticides, herbicides, insecticides, fertilizers, and landscape materials; and (iii) construction and domestic wastes such as packaging materials, scrap construction materials, masonry products, timber, pipe and electrical cuttings, plastics, Styrofoam, concrete, and other trash or building materials;
 - (7) Prevent the discharge of fuels, oils, and other petroleum products, hazardous or toxic wastes, and sanitary wastes; and
 - (8) Address any other discharge from the potential pollutant-generating activities not addressed above; and
- f. Describe procedures for providing pollution prevention awareness of all applicable wastes, including any wash water, disposal practices, and applicable disposal locations of such wastes, to personnel in order to comply with the conditions of this general permit. The operator shall implement the procedures described in the SWPPP.
5. SWPPP requirements for discharges to impaired waters, surface waters with an applicable TMDL wasteload allocation established and approved prior to the term of this general permit, and exceptional waters. The SWPPP shall:
- a. Identify the impaired water(s), approved TMDL(s), pollutant(s) of concern, and exceptional waters identified in 9VAC25-260-30 A 3 c, when applicable;
 - b. Provide clear direction that:
 - (1) Permanent or temporary soil stabilization shall be applied to denuded areas within seven days after final grade is reached on any portion of the site;
 - (2) Nutrients shall be applied in accordance with manufacturer's recommendations or an approved nutrient management plan and shall not be applied during rainfall events; and
 - (3) A modified inspection schedule shall be implemented in accordance with Part I B 4 or Part I B 5.

6. Qualified personnel. The name, phone number, and qualifications of the qualified personnel conducting inspections required by this general permit.
7. Delegation of authority. The individuals or positions with delegated authority, in accordance with Part III K, to sign inspection reports or modify the SWPPP.
8. SWPPP signature. The SWPPP shall be signed and dated in accordance with Part III K.

B. SWPPP amendments, modification, and updates.

1. The operator shall amend the SWPPP whenever there is a change in the design, construction, operation, or maintenance that has a significant effect on the discharge of pollutants to surface waters and that has not been previously addressed in the SWPPP.
2. The SWPPP must be amended if, during inspections or investigations by the operator's qualified personnel, or by local, state, or federal officials, it is determined that the existing control measures are ineffective in minimizing pollutants in discharges from the construction activity. Revisions to the SWPPP shall include additional or modified control measures designed and implemented to correct problems identified. If approval by the VESCP authority, VSMP authority, or department is necessary for the control measure, revisions to the SWPPP shall be completed no later than seven calendar days following approval. Implementation of these additional or modified control measures must be accomplished as described in Part II G.
3. The SWPPP must clearly identify the contractor(s) that will implement and maintain each control measure identified in the SWPPP. The SWPPP shall be amended to identify any new contractor that will implement and maintain a control measure.
4. The operator shall update the SWPPP no later than seven days following any modification to its implementation. All modifications or updates to the SWPPP shall be noted and shall include the following items:
 - a. A record of dates when:
 - (1) Major grading activities occur;
 - (2) Construction activities temporarily or permanently cease on a portion of the site; and
 - (3) Stabilization measures are initiated;
 - b. Documentation of replaced or modified controls where periodic inspections or other information have indicated that the controls have been used inappropriately or incorrectly and where modified as soon as possible;
 - c. Areas that have reached final stabilization and where no further SWPPP or inspection requirements apply;
 - d. All properties that are no longer under the legal control of the operator and the dates on which the operator no longer had legal control over each property;
 - e. The date of any prohibited discharges, the discharge volume released, and what actions were taken to minimize the impact of the release;
 - f. Measures taken to prevent the reoccurrence of any prohibited discharge; and
 - g. Measures taken to address any evidence identified as a result of an inspection required under Part II F.

5. Amendments, modifications, or updates to the SWPPP shall be signed in accordance with Part III K.

C. Public Notification. Upon commencement of land disturbance, the operator shall post conspicuously a copy of the notice of coverage letter near the main entrance of the construction activity. For linear projects, the operator shall post the notice of coverage letter at a publicly accessible location near an active part of the construction project (e.g., where a pipeline crosses a public road). The operator shall maintain the posted information until termination of general permit coverage as specified in Part I F.

D. SWPPP availability.

1. Operators with day-to-day operational control over SWPPP implementation shall have a copy of the SWPPP available at a central location on-site for use by those identified as having responsibilities under the SWPPP whenever they are on the construction site.
2. The operator shall make the SWPPP and all amendments, modifications, and updates available upon request to the department, the VSMP authority, the EPA, the VESCP authority, local government officials, or the operator of a municipal separate storm sewer system receiving discharges from the construction activity. If an on-site location is unavailable to store the SWPPP when no personnel are present, notice of the SWPPP's location must be posted near the main entrance of the construction site.
3. The operator shall make the SWPPP available for public review in an electronic format or in hard copy. Information for public access to the SWPPP shall be posted and maintained in accordance with Part II C. If not provided electronically, public access to the SWPPP may be arranged upon request at a time and at a publicly accessible location convenient to the operator or his designee but shall be no less than once per month and shall be during normal business hours. Information not required to be contained within the SWPPP by this general permit is not required to be released.

E. SWPPP implementation. The operator shall implement the SWPPP and subsequent amendments, modifications, and updates from commencement of land disturbance until termination of general permit coverage as specified in Part I F.

1. All control measures must be properly maintained in effective operating condition in accordance with good engineering practices and, where applicable, manufacturer specifications. If a site inspection required by Part II F identifies a control measure that is not operating effectively, corrective action(s) shall be completed as soon as practicable, but no later than seven days after discovery or a longer period as established by the VSMP authority, to maintain the continued effectiveness of the control measures.
2. If site inspections required by Part II F identify an existing control measure that needs to be modified or if an additional control measure is necessary for any reason, implementation shall be completed prior to the next anticipated measurable storm event. If implementation prior to the next anticipated measurable storm event is impracticable, then alternative control measures shall be implemented as soon as practicable, but no later than seven days after discovery or a longer period as established by the VSMP authority.

F. SWPPP Inspections.

1. Personnel responsible for on-site and off-site inspections. Inspections required by this general permit shall be conducted by the qualified personnel identified by the operator in the SWPPP. The operator is responsible for insuring that the qualified personnel conduct the inspection.
2. Inspection schedule.
 - a. Inspections shall be conducted at a frequency of:

- (1) At least once every five business days; or
 - (2) At least once every 10 business days and no later than 48 hours following a measurable storm event. In the event that a measurable storm event occurs when there are more than 48 hours between business days, the inspection shall be conducted no later than the next business day.
- b. Where areas have been temporarily stabilized or land-disturbing activities will be suspended due to continuous frozen ground conditions and stormwater discharges are unlikely, the inspection frequency may be reduced to once per month. If weather conditions (such as above freezing temperatures or rain or snow events) make discharges likely, the operator shall immediately resume the regular inspection frequency.
- c. Representative inspections may be utilized for utility line installation, pipeline construction, or other similar linear construction activities provided that:
- (1) Temporary or permanent soil stabilization has been installed and vehicle access may compromise the temporary or permanent soil stabilization and potentially cause additional land disturbance increasing the potential for erosion;
 - (2) Inspections occur on the same frequency as other construction activities;
 - (3) Control measures are inspected along the construction site 0.25 miles above and below each access point (i.e., where a roadway, undisturbed right-of-way, or other similar feature intersects the construction activity and access does not compromise temporary or permanent soil stabilization); and
 - (4) Inspection locations are provided in the report required by Part II F.
3. Inspection requirements.
- a. As part of the inspection, the qualified personnel shall:
- (1) Record the date and time of the inspection and when applicable the date and rainfall amount of the last measurable storm event;
 - (2) Record the information and a description of any discharges occurring at the time of the inspection;
 - (3) Record any land-disturbing activities that have occurred outside of the approved erosion and sediment control plan;
 - (4) Inspect the following for installation in accordance with the approved erosion and sediment control plan, identification of any maintenance needs, and evaluation of effectiveness in minimizing sediment discharge, including whether the control has been inappropriately or incorrectly used:
 - (a) All perimeter erosion and sediment controls, such as silt fence;
 - (b) Soil stockpiles, when applicable, and borrow areas for stabilization or sediment trapping measures;
 - (c) Completed earthen structures, such as dams, dikes, ditches, and diversions for stabilization;

- (d) Cut and fill slopes;
 - (e) Sediment basins and traps, sediment barriers, and other measures installed to control sediment discharge from stormwater;
 - (f) Temporary or permanent channel, flume, or other slope drain structures installed to convey concentrated runoff down cut and fill slopes;
 - (g) Storm inlets that have been made operational to ensure that sediment laden stormwater does not enter without first being filtered or similarly treated; and
 - (h) Construction vehicle access routes that intersect or access paved roads for minimizing sediment tracking;
- (5) Inspect areas that have reached final grade or that will remain dormant for more than 14 days for initiation of stabilization activities;
- (6) Inspect areas that have reached final grade or that will remain dormant for more than 14 days for completion of stabilization activities within seven days of reaching grade or stopping work;
- (7) Inspect for evidence that the approved erosion and sediment control plan, "agreement in lieu of a plan," or erosion and sediment control plan prepared in accordance with department-approved annual standards and specifications has not been properly implemented. This includes but is not limited to:
- (a) Concentrated flows of stormwater in conveyances such as rills, rivulets or channels that have not been filtered, settled, or similarly treated prior to discharge, or evidence thereof;
 - (b) Sediment laden or turbid flows of stormwater that have not been filtered or settled to remove sediments prior to discharge;
 - (c) Sediment deposition in areas that drain to unprotected stormwater inlets or catch basins that discharge to surface waters. Inlets and catch basins with failing sediments controls due to improper installation, lack of maintenance, or inadequate design are considered unprotected;
 - (d) Sediment deposition on any property (including public and private streets) outside of the construction activity covered by this general permit;
 - (e) Required stabilization has not been initiated or completed on portions of the site;
 - (f) Sediment basins without adequate wet or dry storage volume or sediment basins that allow the discharge of stormwater from below the surface of the wet storage portion of the basin;
 - (g) Sediment traps without adequate wet or dry storage or sediment traps that allow the discharge of stormwater from below the surface of the wet storage portion of the trap; and
 - (h) Land disturbance outside of the approved area to be disturbed;
- (8) Inspect pollutant generating activities identified in the pollution prevention plan for the proper implementation, maintenance and effectiveness of the procedures and practices;
- (9) Identify any pollutant generating activities not identified in the pollution prevention plan; and

(10) Identify and document the presence of any evidence of the discharge of pollutants prohibited by this general permit.

4. Inspection report. Each inspection report shall include the following items:
- a. The date and time of the inspection and when applicable, the date and rainfall amount of the last measurable storm event;
 - b. Summarized findings of the inspection;
 - c. The location(s) of prohibited discharges;
 - d. The location(s) of control measures that require maintenance;
 - e. The location(s) of control measures that failed to operate as designed or proved inadequate or inappropriate for a particular location;
 - f. The location(s) where any evidence identified under Part II F 3 a (7) exists;
 - g. The location(s) where any additional control measure is needed that did not exist at the time of inspection;
 - h. A list of corrective actions required (including any changes to the SWPPP that are necessary) as a result of the inspection or to maintain permit compliance;
 - i. Documentation of any corrective actions required from a previous inspection that have not been implemented; and
 - j. The date and signature of the qualified personnel and the operator or its duly authorized representative.

The inspection report and any actions taken in accordance with Part II must be retained by the operator as part of the SWPPP for at least three years from the date that general permit coverage expires or is terminated. The inspection report shall identify any incidents of noncompliance. Where an inspection report does not identify any incidents of noncompliance, the report shall contain a certification that the construction activity is in compliance with the SWPPP and this general permit. The report shall be signed in accordance with Part III K of this general permit.

G. Corrective actions.

1. The operator shall implement the corrective action(s) identified as a result of an inspection as soon as practicable but no later than seven days after discovery or a longer period as approved by the VSMP authority. If approval of a corrective action by a regulatory authority (e.g., VSMP authority, VESCP authority, or the department) is necessary, additional control measures shall be implemented to minimize pollutants in stormwater discharges until such approvals can be obtained.
2. The operator may be required to remove accumulated sediment deposits located outside of the construction activity covered by this general permit as soon as practicable in order to minimize environmental impacts. The operator shall notify the VSMP authority and the department as well as obtain all applicable federal, state, and local authorizations, approvals, and permits prior to the removal of sediments accumulated in surface waters including wetlands.

PART III

CONDITIONS APPLICABLE TO ALL VPDES PERMITS

NOTE: Discharge monitoring is not required for this general permit. If the operator chooses to monitor stormwater discharges or control measures, the operator must comply with the requirements of subsections A, B, and C, as appropriate.

A. Monitoring.

1. Samples and measurements taken for the purpose of monitoring shall be representative of the monitoring activity.
2. Monitoring shall be conducted according to procedures approved under 40 CFR Part 136 or alternative methods approved by the U.S. Environmental Protection Agency, unless other procedures have been specified in this general permit. Analyses performed according to test procedures approved under 40 CFR Part 136 shall be performed by an environmental laboratory certified under regulations adopted by the Department of General Services (1VAC30-45 or 1VAC30-46).
3. The operator shall periodically calibrate and perform maintenance procedures on all monitoring and analytical instrumentation at intervals that will ensure accuracy of measurements.

B. Records.

1. Monitoring records and reports shall include:
 - a. The date, exact place, and time of sampling or measurements;
 - b. The individual(s) who performed the sampling or measurements;
 - c. The date(s) and time(s) analyses were performed;
 - d. The individual(s) who performed the analyses;
 - e. The analytical techniques or methods used; and
 - f. The results of such analyses.
2. The operator shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this general permit, and records of all data used to complete the registration statement for this general permit, for a period of at least three years from the date of the sample, measurement, report or request for coverage. This period of retention shall be extended automatically during the course of any unresolved litigation regarding the regulated activity or regarding control standards applicable to the operator, or as requested by the board.

C. Reporting monitoring results.

1. The operator shall update the SWPPP to include the results of the monitoring as may be performed in accordance with this general permit, unless another reporting schedule is specified elsewhere in this general permit.
2. Monitoring results shall be reported on a discharge monitoring report (DMR); on forms provided, approved or specified by the department; or in any format provided that the date, location, parameter, method, and result of the monitoring activity are included.

3. If the operator monitors any pollutant specifically addressed by this general permit more frequently than required by this general permit using test procedures approved under 40 CFR Part 136 or using other test procedures approved by the U.S. Environmental Protection Agency or using procedures specified in this general permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR or reporting form specified by the department.
4. Calculations for all limitations which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified in this general permit.

D. Duty to provide information. The operator shall furnish, within a reasonable time, any information which the board may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this general permit or to determine compliance with this general permit. The board, department, EPA, or VSMP authority may require the operator to furnish, upon request, such plans, specifications, and other pertinent information as may be necessary to determine the effect of the wastes from his discharge on the quality of surface waters, or such other information as may be necessary to accomplish the purposes of the CWA and the Virginia Stormwater Management Act. The operator shall also furnish to the board, department, EPA, or VSMP authority, upon request, copies of records required to be kept by this general permit.

E. Compliance schedule reports. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this general permit shall be submitted no later than 14 days following each schedule date.

F. Unauthorized stormwater discharges. Pursuant to § 62.1-44.5 of the Code of Virginia, except in compliance with a state permit issued by the department, it shall be unlawful to cause a stormwater discharge from a construction activity.

G. Reports of unauthorized discharges. Any operator who discharges or causes or allows a discharge of sewage, industrial waste, other wastes or any noxious or deleterious substance or a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under either 40 CFR Part 110, 40 CFR Part 117, 40 CFR Part 302, or § 62.1-44.34:19 of the Code of Virginia that occurs during a 24-hour period into or upon surface waters or who discharges or causes or allows a discharge that may reasonably be expected to enter surface waters, shall notify the Department of Environmental Quality of the discharge immediately upon discovery of the discharge, but in no case later than within 24 hours after said discovery. A written report of the unauthorized discharge shall be submitted to the department and the VSMP authority within five days of discovery of the discharge. The written report shall contain:

1. A description of the nature and location of the discharge;
2. The cause of the discharge;
3. The date on which the discharge occurred;
4. The length of time that the discharge continued;
5. The volume of the discharge;
6. If the discharge is continuing, how long it is expected to continue;
7. If the discharge is continuing, what the expected total volume of the discharge will be; and
8. Any steps planned or taken to reduce, eliminate and prevent a recurrence of the present discharge or any future discharges not authorized by this general permit.

Discharges reportable to the department and the VSMP authority under the immediate reporting requirements of other regulations are exempted from this requirement.

H. Reports of unusual or extraordinary discharges. If any unusual or extraordinary discharge including a "bypass" or "upset," as defined herein, should occur from a facility and the discharge enters or could be expected to enter surface waters, the operator shall promptly notify, in no case later than within 24 hours, the department and the VSMP authority by telephone after the discovery of the discharge. This notification shall provide all available details of the incident, including any adverse effects on aquatic life and the known number of fish killed. The operator shall reduce the report to writing and shall submit it to the department and the VSMP authority within five days of discovery of the discharge in accordance with Part III I 2. Unusual and extraordinary discharges include but are not limited to any discharge resulting from:

1. Unusual spillage of materials resulting directly or indirectly from processing operations;
2. Breakdown of processing or accessory equipment;
3. Failure or taking out of service of some or all of the facilities; and
4. Flooding or other acts of nature.

I. Reports of noncompliance. The operator shall report any noncompliance which may adversely affect surface waters or may endanger public health.

1. An oral report to the department and the VSMP authority shall be provided within 24 hours from the time the operator becomes aware of the circumstances. The following shall be included as information that shall be reported within 24 hours under this subdivision:
 - a. Any unanticipated bypass; and
 - b. Any upset that causes a discharge to surface waters.
2. A written report shall be submitted within five days and shall contain:
 - a. A description of the noncompliance and its cause;
 - b. The period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and
 - c. Steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

The department may waive the written report on a case-by-case basis for reports of noncompliance under Part III I if the oral report has been received within 24 hours and no adverse impact on surface waters has been reported.

3. The operator shall report all instances of noncompliance not reported under Part III I 1 or 2 in writing as part of the SWPPP. The reports shall contain the information listed in Part III I 2.

NOTE: The reports required in Part III G, H and I shall be made to the department and the VSMP authority. Reports may be made by telephone, email, or by fax. For reports outside normal working hours, leaving a recorded message shall fulfill the immediate reporting requirement. For emergencies, the Virginia Department of Emergency Management maintains a 24-hour telephone service at 1-800-468-8892.

4. Where the operator becomes aware of a failure to submit any relevant facts, or submittal of incorrect information in any report, including a registration statement, to the department or the VSMP authority, the operator shall promptly submit such facts or correct information.

J. Notice of planned changes.

1. The operator shall give notice to the department and the VSMP authority as soon as possible of any planned physical alterations or additions to the permitted facility or activity. Notice is required only when:
 - a. The operator plans an alteration or addition to any building, structure, facility, or installation that may meet one of the criteria for determining whether a facility is a new source in 9VAC25-870-420;
 - b. The operator plans an alteration or addition that would significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants that are not subject to effluent limitations in this general permit; or
2. The operator shall give advance notice to the department and VSMP authority of any planned changes in the permitted facility or activity, which may result in noncompliance with state permit requirements.

K. Signatory requirements.

1. Registration statement. All registration statements shall be signed as follows:
 - a. For a corporation: by a responsible corporate officer. For the purpose of this chapter, a responsible corporate officer means: (i) a president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy-making or decision-making functions for the corporation; or (ii) the manager of one or more manufacturing, production, or operating facilities, provided the manager is authorized to make management decisions that govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long-term compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for state permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;
 - b. For a partnership or sole proprietorship: by a general partner or the proprietor, respectively; or
 - c. For a municipality, state, federal, or other public agency: by either a principal executive officer or ranking elected official. For purposes of this chapter, a principal executive officer of a public agency includes: (i) the chief executive officer of the agency or (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency.
2. Reports, etc. All reports required by this general permit, including SWPPPs, and other information requested by the board or the department shall be signed by a person described in Part III K 1 or by a duly authorized representative of that person. A person is a duly authorized representative only if:
 - a. The authorization is made in writing by a person described in Part III K 1;
 - b. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the operator. (A duly authorized

representative may thus be either a named individual or any individual occupying a named position); and

- c. The signed and dated written authorization is included in the SWPPP. A copy must be provided to the department and VSMP authority, if requested.
3. Changes to authorization. If an authorization under Part III K 2 is no longer accurate because a different individual or position has responsibility for the overall operation of the construction activity, a new authorization satisfying the requirements of Part III K 2 shall be submitted to the VSMP authority as the administering entity for the board prior to or together with any reports or information to be signed by an authorized representative.
4. Certification. Any person signing a document under Part III K 1 or 2 shall make the following certification:

"I certify under penalty of law that I have read and understand this document and that this document and all attachments were prepared in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

L. Duty to comply. The operator shall comply with all conditions of this general permit. Any state permit noncompliance constitutes a violation of the Virginia Stormwater Management Act and the Clean Water Act, except that noncompliance with certain provisions of this general permit may constitute a violation of the Virginia Stormwater Management Act but not the Clean Water Act. Permit noncompliance is grounds for enforcement action; for state permit termination, revocation and reissuance, or modification; or denial of a state permit renewal application.

The operator shall comply with effluent standards or prohibitions established under § 307(a) of the Clean Water Act for toxic pollutants within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if this general permit has not yet been modified to incorporate the requirement.

M. Duty to reapply. If the operator wishes to continue an activity regulated by this general permit after the expiration date of this general permit, the operator shall submit a new registration statement at least 90 days before the expiration date of the existing general permit, unless permission for a later date has been granted by the board. The board shall not grant permission for registration statements to be submitted later than the expiration date of the existing general permit.

N. Effect of a state permit. This general permit does not convey any property rights in either real or personal property or any exclusive privileges, nor does it authorize any injury to private property or invasion of personal rights, or any infringement of federal, state or local law or regulations.

O. State law. Nothing in this general permit shall be construed to preclude the institution of any legal action under, or relieve the operator from any responsibilities, liabilities, or penalties established pursuant to any other state law or regulation or under authority preserved by § 510 of the Clean Water Act. Except as provided in general permit conditions on "bypassing" (Part III U) and "upset" (Part III V), nothing in this general permit shall be construed to relieve the operator from civil and criminal penalties for noncompliance.

P. Oil and hazardous substance liability. Nothing in this general permit shall be construed to preclude the institution of any legal action or relieve the operator from any responsibilities, liabilities, or penalties to which the operator is or may be subject under §§ 62.1-44.34:14 through 62.1-44.34:23 of the State Water Control Law or § 311 of the Clean Water Act.

Q. Proper operation and maintenance. The operator shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances), which are installed or used by the operator to achieve compliance with the conditions of this general permit. Proper operation and maintenance also includes effective plant performance, adequate funding, adequate staffing, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems, which are installed by the operator only when the operation is necessary to achieve compliance with the conditions of this general permit.

R. Disposal of solids or sludges. Solids, sludges or other pollutants removed in the course of treatment or management of pollutants shall be disposed of in a manner so as to prevent any pollutant from such materials from entering surface waters and in compliance with all applicable state and federal laws and regulations.

S. Duty to mitigate. The operator shall take all steps to minimize or prevent any discharge in violation of this general permit that has a reasonable likelihood of adversely affecting human health or the environment.

T. Need to halt or reduce activity not a defense. It shall not be a defense for an operator in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this general permit.

U. Bypass.

1. "Bypass," as defined in 9VAC25-870-10, means the intentional diversion of waste streams from any portion of a treatment facility. The operator may allow any bypass to occur that does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to ensure efficient operation. These bypasses are not subject to the provisions of Part III U 2 and 3.
2. Notice.
 - a. Anticipated bypass. If the operator knows in advance of the need for a bypass, the operator shall submit prior notice to the department, if possible at least 10 days before the date of the bypass.
 - b. Unanticipated bypass. The operator shall submit notice of an unanticipated bypass as required in Part III I.
3. Prohibition of bypass.
 - a. Except as provided in Part III U 1, bypass is prohibited, and the board or department may take enforcement action against an operator for bypass unless:
 - (1) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage. Severe property damage means substantial physical damage to property, damage to the treatment facilities that causes them to become inoperable, or substantial and permanent loss of natural resources that can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production;
 - (2) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass that occurred during normal periods of equipment downtime or preventive maintenance; and
 - (3) The operator submitted notices as required under Part III U 2.

- b. The department may approve an anticipated bypass, after considering its adverse effects, if the department determines that it will meet the three conditions listed in Part III U 3 a.

V. Upset.

1. An "upset," as defined in 9VAC25-870-10, means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based state permit effluent limitations because of factors beyond the reasonable control of the operator. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
2. An upset constitutes an affirmative defense to an action brought for noncompliance with technology-based state permit effluent limitations if the requirements of Part III V 4 are met. A determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is not a final administrative action subject to judicial review.
3. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventative maintenance, or careless or improper operation.
4. An operator who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs or other relevant evidence that:
 - a. An upset occurred and that the operator can identify the cause(s) of the upset;
 - b. The permitted facility was at the time being properly operated;
 - c. The operator submitted notice of the upset as required in Part III I; and
 - d. The operator complied with any remedial measures required under Part III S.
5. In any enforcement proceeding, the operator seeking to establish the occurrence of an upset has the burden of proof.

W. Inspection and entry. The operator shall allow the department as the board's designee, the VSMP authority, EPA, or an authorized representative of either entity (including an authorized contractor), upon presentation of credentials and other documents as may be required by law to:

1. Enter upon the operator's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this general permit;
2. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this general permit;
3. Inspect and photograph at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this general permit; and
4. Sample or monitor at reasonable times, for the purposes of ensuring state permit compliance or as otherwise authorized by the Clean Water Act or the Virginia Stormwater Management Act, any substances or parameters at any location.

For purposes of this section, the time for inspection shall be deemed reasonable during regular business hours, and whenever the facility is discharging. Nothing contained herein shall make an inspection unreasonable during an emergency.

X. State permit actions. State permits may be modified, revoked and reissued, or terminated for cause. The filing of a request by the operator for a state permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any state permit condition.

Y. Transfer of state permits.

1. State permits are not transferable to any person except after notice to the department. Except as provided in Part III Y 2, a state permit may be transferred by the operator to a new operator only if the state permit has been modified or revoked and reissued, or a minor modification made, to identify the new operator and incorporate such other requirements as may be necessary under the Virginia Stormwater Management Act and the Clean Water Act.
2. As an alternative to transfers under Part III Y 1, this state permit may be automatically transferred to a new operator if:
 - a. The current operator notifies the department at least 30 days in advance of the proposed transfer of the title to the facility or property;
 - b. The notice includes a written agreement between the existing and new operators containing a specific date for transfer of state permit responsibility, coverage, and liability between them; and
 - c. The department does not notify the existing operator and the proposed new operator of its intent to modify or revoke and reissue the state permit. If this notice is not received, the transfer is effective on the date specified in the agreement mentioned in Part III Y 2 b.
3. For ongoing construction activity involving a change of operator, the new operator shall accept and maintain the existing SWPPP, or prepare and implement a new SWPPP prior to taking over operations at the site.

Z. Severability. The provisions of this general permit are severable, and if any provision of this general permit or the application of any provision of this state permit to any circumstance, is held invalid, the application of such provision to other circumstances and the remainder of this general permit shall not be affected thereby.

DEFINITIONS

"Business day" means Monday through Friday excluding state holidays.

"Commencement of land disturbance" means the initial disturbance of soils associated with clearing, grading, or excavating activities or other construction activities (e.g., stockpiling of fill material).

"Construction site" means the land where any land-disturbing activity is physically located or conducted, including any adjacent land used or preserved in connection with the land-disturbing activity.

"Final stabilization" means that one of the following situations has occurred:

1. All soil disturbing activities at the site have been completed and a permanent vegetative cover has been established on denuded areas not otherwise permanently stabilized. Permanent vegetation shall not be considered established until a ground cover is achieved that is uniform (e.g., evenly distributed), mature enough to survive, and will inhibit erosion.
2. For individual lots in residential construction, final stabilization can occur by either:
 - a. The homebuilder completing final stabilization as specified in subdivision 1 of this definition; or
 - b. The homebuilder establishing temporary soil stabilization, including perimeter controls for an individual lot prior to occupation of the home by the homeowner, and informing the homeowner of the need for, and benefits of, final stabilization.
3. For construction projects on land used for agricultural purposes, final stabilization may be accomplished by returning the disturbed land to its preconstruction agricultural use. Areas disturbed that were not previously used for agricultural activities, such as buffer strips immediately adjacent to surface waters, and areas that are not being returned to their preconstruction agricultural use must meet the final stabilization criteria specified in subdivision 1 or 2 of this definition.

"Immediately" means as soon as practicable, but no later than the end of the next business day, following the day when the land-disturbing activities have temporarily or permanently ceased. In the context of this general permit, "immediately" is used to define the deadline for initiating stabilization measures.

"Impaired waters" means surface waters identified as impaired on the 2012 § 305(b)/303(d) Water Quality Assessment Integrated Report.

"Infeasible" means not technologically possible or not economically practicable and achievable in light of best industry practices.

"Initiation of stabilization activities" means:

1. Prepping the soil for vegetative or nonvegetative stabilization;
2. Applying mulch or other nonvegetative product to the exposed area;
3. Seeding or planting the exposed area;
4. Starting any of the above activities on a portion of the area to be stabilized, but not on the entire area;
or
5. Finalizing arrangements to have the stabilization product fully installed in compliance with the applicable deadline for completing stabilization.

This list is not exhaustive.

"Measurable storm event" means a rainfall event producing 0.25 inches of rain or greater over 24 hours.

"Stabilized" means land that has been treated to withstand normal exposure to natural forces without incurring erosion damage.

APPENDIX 2

Record of Land Disturbance

& SWPPP Modifications (Major Revisions)

Major Revisions

Major revisions that exit the permitted LOD will be submitted to VADEQ for review and approval prior to implementation of the change. Major revisions include (but are not limited to) the following:

- **Reroutes;**
- **Proposed access road additions; and**
- **Proposed additional temporary workspace (ATWS) areas**

The revision log documenting redline changes as well as the redline markup of ESC/SWM drawings will be located in each construction spread permit mailbox.

Certification of Stormwater Pollution Prevention Plan Revisions

Amendments, modifications, and updates will be made to the Stormwater Pollution Prevention Plan (SWPPP) whenever there is a change in the design, construction, operation, or maintenance that has a significant effect on the potential discharge of pollutants to surface waters. Revisions may include additional or modified control measures identified in the field during construction. These small field-approved changes will be documented and dated on the construction alignment sheets, site plans, and/or inspection reports. Revisions to the SWPPP narrative will be recorded below, as necessary:

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

Signature¹:		Date:
Printed Name:		Title:
Revision _____	Revision Description:	

¹ Certification will be signed by a *responsible corporate officer* or by a *duly authorized representative* of that person. Specific requirements and responsibilities of the responsible corporate officer or duly authorized representative as well as delegate of authority to SWPPP Coordinator are discussed in detail in below.

APPENDIX 3

Record of Site Inspections



Visual Site Inspection Report

Project Name		AFE		Spread	
Contractor				Report #	
Inspector	Tara Killen			Date/Time	1/9/2018 4:49 PM
Permit #		Inspection Type		Station Begin	
State		Inspection Area		Station End	
County		Ground		Temperature (°F)	
Municipality		Weather		Rain Gauge (in)	
GPS Location				Rain Accumulation Time (days)	

1. Are the approved (stamped) E&S Plan and PCSM Plan present on site?
2. Are there activities occurring outside of the limits of disturbance shown on the plan drawings? (If yes, notify the MVP Environmental Permitting Coordinator and explain in comments.)
3. Is Construction sequence outlined in the construction notes of the E&S plan set or PCSM plan set being followed? (If No, notify MVP Environmental Permitting Coordinator and explain in comments.)
4. **E&S BMPs** (List BMPs and note if installed and maintained as per the plan. If corrective action is needed, a picture is required.)

E&S BMPs	Compliance Level	Corrective Action	Corrective Time Frame

5. Site Conditions	
Is an unauthorized discharge (such as sediment, gravel, oil, HDD fluid, etc.) occurring to waters, wetlands, or beyond defined limits of disturbance resulting from earth disturbance activity or ineffective BMP? If yes, take a photo and immediately contact MVP Environmental Permitting Coordinator.	
Have inactive disturbed areas (stockpiles, final grade) been stabilized per state requirements?	
Are slopes 3:1 and greater stabilized with appropriate BMPs as per E&S plans?	
Has a new slip/slide been observed? (If yes, complete Slide Report Form)	

AFE		Date/Time	1/9/2018 4:49 PM	Report #	
6. PCSM BMPs (List BMPs and note if installed and maintained as per the plan. If corrective action is needed, a picture is required.)					
PCSM BMPs		Compliance Level	Corrective Action	Corrective Time Frame	
7. Identify all remedial measures that have been taken since the previous inspection was conducted.					
Comments (Reference above questions as appropriate.)					
Note: It is a condition of National Pollutant Discharge Elimination System and Erosion and Sediment permits that a maintenance program be conducted to provide for the operation and maintenance of all BMPs to be inspected on a weekly basis and after each stormwater event. Please list in the space provided comments to note if repairs or replacement are needed or have been made for BMPs as a result of the inspection. Failure to conduct the required inspection may result in permit suspension or the imposition of civil penalties. If supplemental monitoring is required as part of a permit condition this form may be used to meet those monitoring requirements.					

A/E		Date/Time	1/9/2018 4:49 PM	Report #	
Pictures					
Insert image here			Insert image here		
GPS Location		GPS Location			
Description		Description			
Insert image here			Insert image here		
GPS Location		GPS Location			
Description		Description			
Insert image here			Insert image here		
GPS Location		GPS Location			
Description		Description			

APPENDIX 4

Record of Contractor Certification

Contractor Certification

Contractors noted below have been trained in pollution prevention practices and are familiar with the procedures and information contained within this SWPPP.

Site: Mountain Valley Pipeline Project

SWPPP Measure	Company Name	Contact Name	Business Address	Phone Number
General Contractor				
Contractor Superintendent*				
E&S Controls				
Portable Toilets				
Trash Containers				
Concrete				
Karst Specialist 1				
Karst Specialist 2				
			*The contractor superintendent shall act as the Emergency Coordinator for the Contractor, per Section 5.2.1 of the SPCC Plan	

APPENDIX 5

Record of Inspector Certification

Mountain Valley Pipeline
Project Environmental Inspector
VADEQ Certifications Summary 3/23/18

Personnel	Company	VADEQ Certifications		
		VADEQ - ESC Inspector ID	VADEQ - SWM Inspector ID	Responsible Land Disturber ID
Tracy Hilbun	MVP-Contractor	DIN0848	DIN0848	-
Casey Lee McGaha	MVP-Contractor	DIN0847	DIN0847	-
Doug Davenport	MVP-Contractor	ESIN0835	SWIN1263	RLD07711
Randy Thomas Clark	MVP-Contractor	ESIN0856	-	RLD08559
Richard Kim McLeroy	MVP-Contractor	ESIN0857	conditional certification *	RLD08782
Dennis Lamar Evans	MVP-Contractor	ESIN0864	-	RLD08775
Patrick Davis	MVP-Contractor	conditional certification *	-	RLD08783
Charles Robertson	MVP-Contractor	ESIN0809	conditional certification *	RLD08075
Rayla Marical	MVP-Contractor	DIN0856	DIN0856	-
Frank Weaver	MVP-Contractor	conditional certification *	conditional certification *	-
Brian Clauto	EQT	conditional certification *	conditional certification *	-
Tim Bowen	MVP-Contractor	conditional certification *	conditional certification *	-
Garrett Barclay	MVP-Contractor	conditional certification *	conditional certification *	-
Bradley Ingram	MVP-Contractor	conditional certification *	conditional certification *	-
David Burkhart	MVP-Contractor	conditional certification *	-	-
Kyle Eubanks	MVP-Contractor	conditional certification *	-	-
Gavin Sherburne	Precision Pipeline	conditional certification *	-	-
Jason Stromburg	Precision Pipeline	conditional certification *	-	-
James L. Pierce	MVP-Contractor	conditional certification *	-	-
Mike Ruchti	MVP-Contractor	conditional certification *	conditional certification *	-
Tara Killen	MVP-Contractor	conditional certification *	conditional certification *	-
Stephen Fisher	WSSI	DCA0345	DCA0345	
Marshall Willis	WSSI	DCA0327	DCA0327	
Ben Farmer	WSSI	DIN0882	DIN0882	
Terry Willard	WSSI	ESIN0769	SWIN1292	

* Conditional certification indicates individual has attended the required VADEQ ESC or SWM Inspector certification training sessions.

APPENDIX 6

Temporary BMP Location Tracking Table

Minor field-approved revisions that do not increase the LOD or that will increase the effectiveness of ESC and SWM BMPs will be 'red-lined' on a set of plans that will remain on site for the duration of the Project to allow MVP and VADEQ to ensure compliance with the approved plan and applicable regulatory requirements. MVP will maintain a log documenting all red-lined per construction spread. The log will be presented to the VADEQ Inspector during project inspections for signoff. Minor redline revisions include (but are not limited to) the following:

- ❖ Adjustment of BMP orientation to ensure proper function and protection of the adjacent resource;
- ❖ Implementation of additional measures to meet changing site conditions or to address areas of potential concern;
- ❖ Adjusting the location of pipeline centerline within the permitted LOD;
- ❖ Adjusting/lengthening the Temporary Stone Construction Entrance to address weather conditions; and
- ❖ Additional reduction of LOD where necessary.

Temporary BMP Location Tracking

Each time a temporary BMP (concrete washout, porta-john, dumpsters, fuel storage, etc.) is relocated on site, the current location should be listed on this document.

*BMP locations may also be tracked on a site map/plan located with SWPPP

[illegible]

APPENDIX 7

Plan Sheet Excerpts

APPENDIX 9

Spill Prevention Control and Countermeasure Plan (SPCC)



**Spill Prevention, Control, and Countermeasure (SPCC) Plan
and
Unanticipated Discovery of Contamination Plan
for Construction Activities in Virginia**

Submitted By:

Mountain Valley Pipeline, LLC
555 Southpointe Boulevard, Suite 200
Canonsburg, PA 15317

By means of this certification , this Plan has been prepared in accordance with good engineering practice, including consideration of applicable industry standards, and with the requirements of 40 CFR §112.3(d)

Contents

1.0	OVERVIEW	1
2.1	WASTE MANAGEMENT.....	1
2.2	Material and Waste Inventory	1
2.3	Hazardous Materials and Waste Inspections.....	3
3.1	SPILL PLAN	7
3.2	Spill and Leak Preparedness and Prevention	7
3.2.1	Employee Training	7
3.2.2	Security.....	7
3.2.3	Prevention and Preparedness	7
3.2.4	Tanks	8
3.2.5	Containers.....	9
3.2.6	Loading and Unloading Areas	10
3.2.7	Concrete Coating Areas for Field Joints	11
3.2.8	Equipment Inspections	11
3.2.9	Emergency Equipment.....	11
3.2.10	Contractor's Site Map	12
3.3	Housekeeping Program	12
4.1	KARST AREA EROSION AND SEDIMENTATION CONTROL.....	12
4.2	Regulatory Oversight	13
4.3	Objectives	13
4.4	Considerations for Surface Water Management and E&S Control	13
5.1	CONTINGENCY PLAN AND EMERGENCY PROCEDURES	15
5.2	Responsibilities of MVP and Contractor Personnel	15
5.3	First Responder	15
5.3.1	Contractor EC Responsibilities	16
5.3.2	MVP Responsibilities.....	16
5.3.3	MVP EC Responsibilities.....	16
5.4	Emergency Equipment	17
5.5	Spill Clean-Up / Waste Disposal Procedures	18
5.5.1	Oil and/or Fuel Spills	18
5.5.2	Hazardous Substance Releases.....	19
5.5.3	Unanticipated Release of Hydrostatic Test Water.....	19
5.6	Disposal of Contaminated Materials and/or Soils	20
5.7	Equipment Cleaning / Storage	20
6.0	REGULATORY COMPLIANCE	21

Tables

- 2-1 List of Oil and Fuel to be Used or Stored On-Site during Construction
- 2-2 List of Commercial Chemicals to be Used or Stored On-Site during Construction 2-
- 3 List of Hazardous and Non-Hazardous Wastes to be Used or Stored On-Site during Construction
- 2-4 List of Incompatible Materials to be Used or Stored On-Site during Construction
- 2-5A List of Large Spill Sources
- 2-5B List of Large Spill Sources
- 3-1 Areas Where Potential Spills and Leaks Might Occur
- 3-2 Tank and Container Storage Exception Areas
- 5-1 Spill Response Equipment
- 5-2 Fire Response Equipment
- 5-3 Personal Protective Equipment

Attachments

- Appendix A Unanticipated Discovery of Contamination Plan
- Appendix B Key Emergency Contacts
- Appendix C Petroleum and Hazardous Material Spill Report

Acronyms and Abbreviations

A	acceptable
ABACT	anti-degradation best available combination of technologies
BMP	best management practice
CFR	Code of Federal Regulations
DEQ	Virginia Department of Environmental Quality
EC	Emergency Coordinator
EPA	U.S. Environmental Protection Agency
MVP	Mountain Valley Pipeline, LLC
ESCP	Erosion and Sediment Control Plan
HDD	Horizontally Directional Drilling
ID	Identification
PCB	Polychlorinated Biphenyl
Plan	Preparedness, Prevention, and Contingency and Spill Prevention Control and Countermeasures Plan
PPC	Preparedness, Prevention, and Contingency
PPE	Personal Protective Equipment
Ppm	parts per million
Project	MVP Pipeline Project
ROW	right-of-way
SDS	Safety Data Sheet
SOP	standard operation procedure
SPCC	Spill Prevention Control and Countermeasures
SPRP	Spill Prevention and Response Plan
U	unacceptable

1.0 OVERVIEW

Mountain Valley Pipeline, LLC (MVP), a joint venture between EQT Midstream Partners, LP and affiliates of NextEra Energy, Inc.; Con Edison Gas Midstream LLC; WGL Holdings, Inc.; and RGC Midstream, LLC (collectively referred to as MVP), is seeking a Certificate of Public Convenience and Necessity (Certificate) from the Federal Energy Regulatory Commission (FERC) pursuant to Section 7(c) of the Natural Gas Act authorizing it to construct and operate the proposed Mountain Valley Pipeline Project (Project) located in 17 counties in West Virginia and Virginia. MVP plans to construct an approximately 303-mile, 42-inch-diameter natural gas pipeline to provide timely, cost-effective access to the growing demand for natural gas for use by local distribution companies, industrial users, and power generation in the Mid-Atlantic and southeastern markets, as well as potential markets in the Appalachian region. Construction is anticipated to begin in 2017 and conclude in the fourth quarter of 2018. Construction on National Forest System lands will occur in 2018.

The proposed pipeline will extend from the existing Equitrans, L.P. transmission system and other natural gas facilities in Wetzel County, West Virginia to Transcontinental Gas Pipe Line Company, LLC's (Transco) Zone 5 compressor station 165 in Pittsylvania County, Virginia. In addition to the pipeline, the Project will include approximately 171,600 horsepower of compression at three compressor stations currently planned along the route, as well as measurement, regulation, and other ancillary facilities required for the safe and reliable operation of the pipeline. The pipeline is designed to transport up to 2.0 million dekatherms per day of natural gas.

A 3.5-mile long segment of the Project will cross portions of the Jefferson National Forest (JNF) in Monroe County in southern West Virginia and in Giles, Craig, and Montgomery counties in southwestern Virginia. The JNF is managed by the U.S. Forest Service (USFS) of the U.S. Department of Agriculture. Another 60-foot segment of the Project will cross the Weston and Gauley Bridge Turnpike Trail (Weston and Gauley Turnpike) in Braxton County, West Virginia, which is administered by the U.S. Army Corps of Engineers (USACE). Approval to cross land managed by two or more federal agencies is the responsibility of the U.S. Department of the Interior, Bureau of Land Management (BLM) through issuance of a right-of-way grant. Project-wide construction environmental compliance will be the responsibility of the FERC. The USFS and USACE will also ensure compliance across lands managed or administered by those agencies. Because the majority of federal lands crossed are managed by the USFS, this plan focuses on the JNF, noting any additional or different requirements that are specific to the crossing of the Weston and Gauley Turnpike.

The USFS will be responsible for enforcement of the terms and conditions of the BLM's right-of-way grant on National Forest System lands during the term of the right-of-way grant for the Project. Compliance will be monitored on the JNF portion of this Project by the USFS Project Manager and the Authorized Officer's designated compliance monitors. USFS will have stop-work authority per terms outlined in the BLM right-of-way grant. USFS will also have stop-work authority if unsafe work conditions are encountered during construction.

The FERC will utilize a third-party Compliance Inspection Contractor (CIC) contracted to MVP to act on behalf of the agency to provide Project-wide construction oversight and monitor compliance. The CIC will inspect and monitor preconstruction and construction activities and enforce requirements related to the National Historic Preservation Act (NHPA), the Endangered Species Act (ESA), and other applicable laws and regulations. The Project will adhere to all federal, state, and local permits. The CIC will coordinate with the USFS Project Manager and designated compliance monitors.

The Project has potential to impact sensitive environmental resources and, as a result, environmental protection measures have been developed to minimize potential impacts on these resources and will be applied, as applicable, to the Project.

2.0 WASTE MANAGEMENT

This waste management section provides an overview and checklist to be used before each phase of construction begins at each spread. Each job might require different chemicals and equipment with different fuel requirements that must be documented, accounted for, and contained. Also included at the end of this section are the Weekly Hazardous Materials and Waste Inspection Log for weekly inspection of hazardous materials and waste.

2.1 Material and Waste Inventory

Prior to each phase of construction at each spread, the material and waste inventory must be completed. The inventory must be provided in the Tables 2-1 to 2-4 below and will, depending on the specific circumstances of the planned construction activity, include the following:

- Nutrients, such as fertilizers and sanitary wastes;
- Solid waste, such as scrap metals, masonry products, and other raw construction materials and debris;
- Construction chemicals, such as paints, soils additives, and acids for cleaning;
- Petroleum products, such as fuels and lubricants; and
- Other materials, including concrete wash from mixers and explosives.

The list must include oils and fuels, commercial chemicals, hazardous and nonhazardous wastes, and incompatible materials to be used or stored on site during construction.

TABLE 2-1
List of Oil and Fuel to be Used or Stored On-Site During Construction

Type	Quantity	Containment Method	Location
Notes: A Safety Data Sheet (SDS) for all hazardous substances listed in the above tables shall be provided by the contractor. All containers shall have secondary containment.			

TABLE 2-2
List of Commercial Chemicals to be Used or Stored On-Site during Construction

Type	Quantity	Containment Method	Location
Notes: A SDS for all hazardous substances listed in the above tables shall be provided by the contractor. All containers shall have secondary containment.			

TABLE 2-3
List of Hazardous and Nonhazardous Wastes to be Used or Stored On-Site during Construction

Type	Quantity	Containment Method	Location
Notes: A SDS for all hazardous substances listed in the above tables shall be provided by the contractor. All containers shall have secondary containment.			

TABLE 2-4
List of Incompatible Materials to be Used or Stored On-Site during Construction

Type	Quantity	Containment Method	Location
Notes: A SDS for all hazardous substances listed in the above tables shall be provided by the contractor. All containers shall have secondary containment.			

Incompatible materials shall be stored in separate areas in accordance with nationally recognized standards. Incompatible materials shall not be consecutively placed into a container or tank. Additionally, sources of ignition are prohibited in hazardous materials and wastes areas.

The Contractor shall identify and list all sources of potential large spills, including tank overflow, rupture, or leakage. SPCC information must be included for all containers greater than 55 gallons with a cumulative capacity of 1,320 gallons or greater that contain oil, including petroleum, fuel oil, sludge, oil refuse, and oil mixed with waste, as required in Code of Federal Regulations, Title 40, Part 112 (40 CFR Part 112). The Contractor shall list large spill sources in **Table 2-5A**. Additional sources of large spills can be listed in **Table 2-5B**. Additional tables shall be provided as needed.

TABLE 2-5A
List of Large Spill Sources

Product	Total Quantity Storage Size, Type		Potential Direction of Flow	Maximum Rate of Flow	Structures or Equipment to Contain Spills	Location of Use
	Present	Location				
Note: All containers shall have secondary containment.						

TABLE 2-5B
List of Large Spill Sources

Product	Total Quantity Storage Size, Type		Potential Direction of Flow	Maximum Rate of Flow	Structures or Equipment to Contain Spills	Location of Use
	Present	Location				
Note: All containers shall have secondary containment.						

2.2 Hazardous Materials and Waste Inspections

The Contractor shall inspect weekly hazardous materials and waste and associated storage areas. These weekly inspections shall document the condition of the hazardous materials and waste and the associated storage containers. The Contractor shall file all inspection records with the Chief Inspector and Environmental Inspector on a weekly basis. The weekly inspection form is at the end of this section and is titled *Weekly Hazardous Materials and Waste Inspection Log*.

Weekly Hazardous Materials and Waste Inspection Log

For each item listed below, the Contractor shall indicate whether existing conditions are acceptable (A) or unacceptable (U). Resolution of all unacceptable conditions must be documented. Contractor shall inspect all storage facilities on a regular basis, but not less than weekly. Contractor shall file all inspection records with the Chief Inspector and Environmental Inspector on a weekly basis.

I. STORAGE AREAS FOR FUELS, LUBRICANTS, AND CHEMICALS

General

A/U

- ☐ Construction yard or storage areas secured
- ☐ National Fire Protection Association symbol posted in storage area or at yard entrance
- ☐ Storage areas properly prepared and signed
- ☐ Safety Data Sheets available
- ☐ Hazardous Materials Management Plan and Spill Prevention and Countermeasure Plan available

Hazardous Materials Management

A/U

- ☐ No evidence of spill or leaking materials
- ☐ Incompatible materials separated
- ☐ All containers labeled properly
- ☐ All containers securely closed
- ☐ All containers upright
- ☐ No evidence of container bulging, damage, rust, or corrosion

Secondary Containment Areas

A/U

- ☐ Containment berm intact and capable of holding 110 percent of material stored plus precipitation
- ☐ Lining intact
- ☐ No materials overhanging berms
- ☐ No materials stored on berms
- ☐ No flammable materials used for berms

Compressed Gases

A/U

- ☐ Cylinders labeled with contents
- ☐ Cylinders secured from falling
- ☐ Oxygen stored at least 25 feet away from fuel
- ☐ Cylinders in bulk storage are separated from incompatible materials by fire barriers or by appropriate distance

II. HAZARDOUS WASTE MANAGEMENT

Waste Container Storage

A/U

- ☐ No evidence of spilled or leaking wastes
- ☐ Adequate secondary containment for all wastes
- ☐ Separate containers for each waste watercourse (no piles)
- ☐ Waste area not adjacent to combustibles or compressed gases
- ☐ All containers securely closed
- ☐ Bungs secured tightly
- ☐ Open-top drum hoops secured
- ☐ All containers upright
- ☐ No evidence of container bulging or corrosion
- ☐ No severe damage or rust
- ☐ Containers are compatible with waste (e.g., plastic liner for corrosives, metal liner for solvents)
- ☐ No smoking and general danger and/or warning signs posted

Waste Container Labeling

A/U

- ☐ Containers properly labeled

--

Name, address, and U.S. Environmental Protection Agency identification (ID) number or ID number of generator listed (Not required if Contractor is an exempt small quantity generator)

- ☐ Accumulation start date listed
- ☐ Storage start date listed
- ☐ Chemical and physical composition of waste listed
- ☐ Hazardous property listed

Nonhazardous Waste Areas

A/U

- ☐ No litter in yard
- ☐ No hazardous wastes or used oil mixed with trash (e.g., contaminated soil, oily rags, diapers, or other oily materials)
- ☐ Empty oil and aerosol containers for disposal are completely emptied

III. EMERGENCY RESPONSE EQUIPMENT

A/U

- ☐ Shovels
- ☐ Absorbent materials (e.g., booms, pads, pillows, socks, "Speedy Dry")
- ☐ Personal protective equipment (e.g., goggles, gloves)
- ☐ Fire-fighting equipment
- ☐ First aid supplies (e.g., medical supplies, squeeze bottle eye wash)
- ☐ Department-of-Transportation-approved containers
- ☐ Plastic sheeting, bags, and ties
- ☐ Communication equipment
- ☐ Bung wrench (non-sparking)

IV. CORRECTIVE ACTIONS TAKEN (Required for all unacceptable conditions)

Enter information here

Date:

Contractor Name:

Inspected by (Contractor's Inspector):

Signature:

3.0 SPILL PLAN

This section of the SPCC Plan describes spill preparedness, prevention, and containment. Spill preparedness and prevention training is also discussed in this section.

3.1 Spill and Leak Preparedness and Prevention

3.1.1 Employee Training

Prior to construction, contractors and MVP personnel shall be trained in hazardous waste management procedures that will enable them to respond effectively to emergencies by familiarizing them with emergency procedures, equipment, and communication systems. Personnel who handle, sample, or come in direct contact with oils or hazardous matter shall undergo basic training that stresses the importance of pollution control. Spill prevention control procedures shall be thoroughly explained during the training briefings, which will be conducted by the Contractor Superintendent, the MVP Chief Inspector, and the MVP Environmental Inspector or their designated representative on the job site. The MVP EC shall maintain training verification.

Prior to construction, all Project Chief and Environmental Inspectors shall receive a copy of this SPCC Plan and an approved list of emergency response contractors. Inspectors shall be trained on equipment maintenance, fuel and hazardous material handling, spill prevention procedures, and spill response.

All personnel involved in constructing the proposed facilities shall be aware of the SPCC and the Preparedness, Prevention, and Contingency Plan. Regular training briefings shall be conducted on an as-required basis by the Contractor Superintendent and the MVP Chief Inspector on the job site. These briefings shall include the following:

- Precautionary measures to prevent spills
- Potential sources of spills, including equipment failure and malfunction
- Standard operating procedures (SOPs) in the event of a spill
- Applicable notification requirements
- Equipment, materials, and supplies available for spill clean-up

3.1.2 Security

Hazardous wastes and waste containing polychlorinated biphenyls (PCBs) greater than 50 parts per million (ppm) shall be stored in a secured location (i.e., fenced, locked). Fuel storage areas shall be located to minimize, as much as possible, tampering by unauthorized personnel during nonoperational hours.

3.1.3 Prevention and Preparedness

A discharge from the construction site into waters of the state is unlikely to occur. The construction site shall have on-site spill prevention and control facilities and routinely inspect tank and container storage areas (inspection form: Weekly Hazardous Materials/Waste Inspection Log included Section 2), which will mitigate the potential for oil and hazardous material to be released to soil or surface waters. In areas where hazardous materials are required to be stored or used within a wetland, the Contractor

shall prepare and submit for approval a secondary containment plan before working in the wetland area.

Spill or overflow of petroleum that results in a release to the environment that exceeds 25 gallons or that causes a sheen on nearby surface water must be reported immediately. Generally, minor spills or leaks shall be contained within secondary containment areas. In Virginia, spills or overfills must be reported to the DEQ State Water Control Board within 24 hours in the following cases (Virginia Water Control Law, Article 11, 62.1-44.34:19):

- Spill or overflow of a hazardous substance that results in a release to the environment that equals or exceeds its reportable quantity under the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (40 CFR Part 302).
- Oil spills less than 25 gallons to lands that cannot be cleaned up within 24 hours

TABLE 3-1
Areas Where Potential Spills and Leaks Might Occur

Location\Use or Equipment	Quantity/Reportable Quantity	Containment Method	Product
	/		
	/		
	/		
	/		

Note: All containers shall have secondary containment.

3.1.4 Tanks

The Contractor shall take the following precautions to prevent a spill from occurring within tank storage areas:

- Only those tanks for fuel and material storage that meet MVP's approval shall be operated.
- Single-wall tanks shall be provided with temporary secondary containment that will hold at least 110 percent of the tank capacity of the largest tank inside the containment area.
- Precipitation shall be inspected first for evidence of oil, including a sheen, or other contaminants. If a sheen or other indicators of oil or contamination is present, then the material shall be collected for proper disposal off site. Any precipitation shall be removed from the containment area to maintain the available containment volume at 110 percent of the volume of material stored.
- Only self-supporting tanks constructed of carbon steel or other materials compatible with the contents of each tank shall be used.
- PCB (50 ppm or greater) storage tanks shall be double-walled or have secondary containment that will hold 200 percent of the tank capacity.
- Elevated tanks shall be a maximum of two feet above grade.
- Tank storage shall be located in areas that are at least 100 feet from all waterbodies, wetlands, and designated municipal watershed areas.
- All tanks shall be inspected daily for leaks and deterioration by the Contractor EC or designee. The results of all inspections shall be recorded on the Weekly Hazardous Materials and Waste

Inspection Log (included at the end of Section 2). Copies of the log for unsatisfactory storage area inspections shall be distributed to MVP's EC and the Project Manager. Leaking and/or deteriorated tanks shall be repaired or replaced as soon as the condition is first detected.

- Tanks and secondary containment drains shall remain closed when not in use.
- Vehicle-mounted tanks shall be equipped with flame and/or spark arrestors on all vents to prevent self-ignition.
- Incompatible materials shall not be stored in sequence in tanks prior to decontamination. A list of incompatible materials is listed in Section 2, Waste Management, Table 2-4.
- Tanks used to store hazardous materials shall be decontaminated before they are used at a different construction location if they could contaminate the next material to be placed in the tank. The tanks shall be decontaminated if they are to be returned to a vendor. The tanks shall also be decontaminated if they are being returned to an MVP yard and no immediate specific same service use is scheduled.
- If a tank contains hazardous material, then the MVP EC shall be contacted, and transportation shall follow the steps outlined in MVP's Environmental SOP regarding Waste Transportation.

TABLE 3-2
Tank and Container Storage Exception Areas

Material	Quantity	Containment Method	Location
Note: Exception areas must be approved by the EC.			

3.1.5 Containers

The Contractor shall take the following precautions to prevent a spill from occurring within container storage areas:

- For drum storage, reference MVP's Environmental SOPs; MVP EC shall have a copy of the current Environmental SOPs.
- Containers shall remain closed when not in use.
- All containers shall have temporary containment. A list of temporary containment is listed in Section 2, Waste Management, Tables 2-1 through 2-4.
- Small cans of gasoline, diesel, solvents, and other hazardous materials shall be stored within the temporary containment or within secured trailers or vehicles when not in use.
- Incompatible materials shall not be in sequence in containers before decontamination. A list of incompatible materials is included in Section 2, Waste Management, Table 2-4.
- Containers used to store hazardous materials shall be decontaminated before they are used at a different construction location if they could contaminate the next material to be placed in the

container. The containers shall always be decontaminated if they are being returned a MVP yard and no immediate specific same service use is scheduled.

- If a container contains a hazardous material, then transportation shall follow the steps outlined in MVP's Environmental SOPs regarding Waste Transportation.
- No incompatible material shall be stored together in the same containment area.
- Leaking and/or deteriorated containers shall be replaced as soon as the condition is first detected.
- Containers shall be stored in areas that are at least 100 feet from all waterbodies, wetlands, and designated municipal watershed areas, with certain exceptions as approved by the Contractor EC as listed in Table 3-2.
- All container storage and containment areas shall be used to store waste or products according to the guidelines described in MVP's Environmental SOPs regarding Facility Inspections.

3.1.6 Loading and Unloading Areas

The Contractor shall take the precautions listed below to prevent a spill from occurring within loading and unloading areas when those areas are located at the construction site; MVP personnel shall be present during loading and unloading activities:

- Liquids shall be transferred and refueling shall only occur in predesignated and preapproved locations that are at least 100 feet from all waterbodies and wetlands. Exceptions might be approved by the Environmental Inspector if no reasonable alternatives are available and secondary containment is used. Certain exceptions are listed in Table 3-2.
- All loading and unloading areas shall be closely monitored to prevent any leaks and spills.
- The area beneath loading and unloading locations shall be inspected for spills before and after each use.
- All hose connections shall use drip pans at the hose connections while loading and unloading liquids. If a leak or spill occurs, then the loading and unloading operation shall be stopped and the spill shall be contained, cleaned up, and collected before operations continue.
- All tank truck outlets shall be inspected before trucks leave the loading and unloading area to prevent possible leakage from the truck while in transit.
- Each refueling vehicle shall have a sufficient number of shovels, brooms, 10-millimeter polyethylene sheeting, and fire protection equipment to contain a moderate oil and/or fuel spill.
- Any service vehicle used to transport lubricants and fuel shall be equipped with an emergency response kit, and this kit, at a minimum, must include the following:
 - 25 pounds of granular oil absorbent
 - Ten 48-inch x 3-inch oil socks
 - Five 17-inch x 17-inch oil pillows
 - One 10-inch x 4-inch oil boom
 - Twenty 24-inch x 24-inch x 3/8-inch oil mats
 - Garden-size, 6-millimeter polyethylene bags
 - Ten) pair of latex gloves
 - One 55-gallon polyethylene open-head drum

In addition, a smaller chemical response kit shall be available that contains the following:

- One bag of loose chemical pulp
- Two to three (2 to 3) 17-inch x 17-inch chemical pillows
- Two 48-inch x 3-inch chemical socks
- Five 18-inch x 18-inch x 3/8-inch absorbent mats
- Garden-size, 6-millimeter, polyethylene bags
- Ten pair of latex gloves
- One 30-gallon polyethylene open-head drum
- Hazardous waste labels

3.1.7 Concrete Coating Areas for Field Joints

Concrete coating of field joints shall be performed **at least 100 feet from the edge of all waterbodies**. Where topographic conditions and/or work space limitations necessitate applying concrete coating within 100 feet of a watercourse, sufficient containment measures shall be implemented to eliminate the spill of any concrete coating materials into a wetland or watercourse. Containment such as the following (or equivalent as approved by the MVP EC in a secondary containment plan to be submitted by the Contractor) shall be used:

- Concrete coating materials shall be temporarily stored in an earthen berm with a polyethylene lining of 10-millimeter thickness or in a portable containment tray constructed of steel plate measuring a minimum of 4-feet-square by 1-foot-deep.
- Portable-mechanical mixing equipment, if required, shall be operated within a containment area constructed of temporary earthen berms and polyethylene lining a minimum of 10-millimeter thickness.
- Concrete materials in a portable container (such as a 55-gallon drum cut in half or equivalent) shall be mixed within an earthen berm with polyethylene lining of 10-millimeter thickness or within a portable containment tray constructed of steel plate, measuring a minimum of 4-feet-square by 1-foot-deep.

3.1.8 Equipment Inspections

All construction equipment in use on the pipeline right-of-way (ROW) shall be inspected daily. Any leaks shall be repaired immediately or the piece of equipment shall be removed from service, removed from the ROW, and repaired prior to returning to service. All inspections shall be documented on a daily leak report submitted to MVP.

3.1.9 Emergency Equipment

The construction site and/or contractor yard shall have adequate manpower and equipment necessary to divert any spilled material from waterbodies and wetland areas. Emergency equipment shall include, but is not limited to, shovels, backhoes, dozers, front-end loaders, oil-absorbent booms, pillows, socks and/or mats, granular oil absorbent, and chemical absorbent pulp. A list of emergency response equipment and personal protective equipment (PPE) is provided in Section 4.3.

3.1.10 Contractor's Site Map

The Contractor shall prepare a site map before construction begins. At a minimum, the Contractor's site map shall include the following:

- Orientation and scale
- Total land area in square feet
- Access and egress points
- Buildings and/or temporary trailers
- Parking lots
- Adjacent land uses (if business, indicate business name)
- Surrounding roads, storm drains, and waterways (e.g., waterbodies and wetlands)
- Locations of hazardous materials and waste storage
- Underground and aboveground tanks
- Containment or diversion structures (e.g., dikes, berms, retention ponds)
- Shutoff valves and/or circuit breakers
- Location of emergency response materials and equipment
- Location of MSDS and SPCC Plan
- Location of emergency assembly area

3.2 Housekeeping Program

The construction area shall be maintained in a neat and orderly manner. Solid wastes, such as food wrappings, cigarette butts and packets, Styrofoam cups and plates, and similar wastes, shall be disposed of offsite and not in any construction excavation area. Any spills or leaks shall be cleaned up as expeditiously as possible. Trash shall be routinely collected for offsite disposal. Container storage areas shall be maintained in a neat and orderly manner.

4.0 KARST AREA EROSION AND SEDIMENTATION CONTROL

The following discussion outlines erosion and sediment control (ESC) measures to support MVP construction in karst terrain. Karst terrain underlies portions of the proposed MVP route from West Virginia/Virginia State line into Roanoke County, Virginia. Karst terrain is a landscape formed from the dissolution of soluble rocks. It is characterized by underground drainage systems with sinkholes, dolines, and caves.

MVP completed a Karst Hazards Assessment that identifies karst features in the vicinity of the Project. MVP also completed a Karst Mitigation Plan that serves as a guidance document for protecting and mitigating karst features during MVP construction. Karst-specific ESC measures are a critical component for protecting karst features and local water bodies during construction and after land reclamation for post-pipeline installation.

4.1 Regulatory Oversight

Virginia codified a law for protecting caves (the Virginia Cave Protection Act, Code of Virginia Section 10.1-1000 to 1008); there is no corresponding law that specifically protects karst.

The Virginia Department of Conservation and Recreation, a division of the Department of Environmental Quality, includes a Karst Protection Coordinator branch. Coordination with the Karst Protection Coordinator is described in more detail in this plan.

4.2 Objectives

The primary objectives for karst-specific ESC are to prevent erosion, overland flow, and sediment transport to water bodies and karst features during pipeline construction, and to prevent erosion, sedimentation, and flooding problems in karst areas after pipeline construction and land reclamation. The primary means to reduce risks for erosion, sedimentation, and flooding in karst terrain is to restore land surface grades to pre-construction characteristics and not significantly change the volume of surface water that enters a karst feature. This can be accomplished by preventing direct impact to karst features and water bodies during construction, and minimizing to the extent practical land surface alterations after pipeline installation and land reclamation. Enhanced Best Management Practices (BMPs) and construction planning in karst terrain are presented herein to accomplish these objectives.

4.3 Considerations for Surface Water Management and Erosion & Sediment

Unlike typical construction and development activities, the Project will not result in large swaths of impervious land, or large swaths of altered grade. The Project is primarily a relatively narrow linear subsurface construction project that will be regraded to pre-construction characteristics, and revegetated.

To minimize the potential for impacts to a karst feature (e.g., sinkhole, cave opening, etc.) or a water resource (e.g., well, spring, stream, pond) from pipeline construction in karst areas, industry-standard ESC practices will be supplemented with enhanced BMPs, and implemented by MVP and its contractors, to accomplish the following objectives:

- Minimize the volume of stormwater and other construction-related surface water run-off;
- Minimize the permanent alteration of land surface characteristics and surface runoff patterns (existing drainage patterns and features should be taken into consideration to minimize changes to the rate that water enters the subsurface through a karst feature);
- Promote broad and shallow surface water flow dispersion with suitable spreading or diversion techniques;
- Prevent uncontrolled release of surface water and sediment to a water body or karst feature;
- Prevent artificial routing of storm water to karst features;
- Prevent blockage or filling of karst features;

- Do not construct artificial storm water structures within karst features;
- Prevent disposal of materials into a karst feature that will degrade the quality of water entering the subsurface through karst feature;
- Install double lines of sediment control fencing and straw bales upslope of a water body or karst feature;
- Stock pile excavated material at least 100 feet from a water body so that the material cannot slough back into these areas;
- Monitor ESC and stormwater management structures periodically during construction, and particularly after precipitation events (stormwater and ESC structures include sediment control fencing, straw bales, temporary detention basins, diversion berms, or containerization - clean, repair, and replace structures as necessary);
- Do not discharge hydrostatic test water in karst areas;
- Establish staging areas for the crew, equipment, hazardous materials, chemicals, fuels, lubricating oils, etc., at least 100 feet from a water body or karst feature;
- Install ESC and stormwater management structures surrounding staging areas to prevent run-on to, and then run-off and sediment migration from these sites;
- Store construction waste materials, debris, and excess materials at least 100 feet from a water body or karst features;
- Refuel and maintain construction equipment at least 100 feet from a water body or karst feature;
- Limit the removal of riparian vegetation to only when it is necessary;
- Re-vegetate all disturbed areas as soon as possible after construction using only native plants to reduce soil erosion. Annual species, such as rye or wheat, may initially be planted along with native species in areas subject to immediate soil loss, such as a steep slope, to provide rapid erosion control. Final re-vegetation should use native species only;
- Replace woody riparian vegetation unavoidably lost using native riparian plants to help prevent the spread of invasive plants;
- Where possible and practical, leave a minimum of 100-foot wide natural vegetated buffer area around a water body or karst feature. Plant a vegetative buffer of at least 100 feet around a water body or karst feature if the vegetation was previously cleared;
- Apply fertilizers, herbicides, pesticides, or other chemicals no closer than 100 feet of a water body or karst feature;

- Evaluate the establishment of vegetation after project completion and inspect all sediment control structures at one month intervals for at least 3 months. Retain sediment control structures until site stabilization is achieved;
- Remove and dispose of all debris and excess construction materials properly upon project completion;
- Remove temporary sediment/erosion control structures upon final site stabilization;
- Clay dams or breakers should be included in pipeline installation design and constructed at appropriate intervals along the trench excavation to impede subsurface flow along the trench.

5.0 CONTINGENCY PLAN AND EMERGENCY PROCEDURES

Emergency response procedures have been developed for the project to guide responses to fires, explosions, releases of oils or hazardous waste to the air, land, or waters of the state regardless of the quantity involved in the incident. For unanticipated release of hydrostatic test waters, MVP shall utilize best management practices (BMPs), as described in the Erosion and Sediment Control Plan (E&SCP) as soon as possible after the release.

5.1 Responsibilities of MVP and Contractor Personnel

If notification is given that an evacuation is necessary, all personnel shall evacuate the construction area via the primary evacuation route (site-specific map with evacuation route to be attached for plant projects) and await further instructions from the EC. If direct access to the primary evacuation route is restricted by fire, spill, smoke, or vapor, facility personnel shall evacuate the facility via alternate evacuation routes to the nearest accessible open area.

5.2 First Responder

Any individual who first observes a spill or any other imminent or actual emergency situation shall take the following steps:

1. Assess the situation to determine if the situation poses an immediate threat to human health or the environment.
2. Identify hazardous substances involved, if any.
3. Report the emergency or spill to the MVP and Contractor EC(s) immediately.
4. Standby at a safe distance and keep others away.
5. Activate emergency shutdown, if necessary.

The Contractor Superintendent shall act as the Emergency Coordinator for the Contractor. The Chief Inspector shall act as the Emergency Coordinator for MVP. The responsibilities of the Emergency Coordinator are presented in the remainder of this section.

5.2.1 Contractor EC Responsibilities

The Contractor EC shall coordinate the response to all spills that occur as a result of Contractor operations. The Contractor shall not coordinate the response of spills of pipeline liquids, hazardous wastes, or the unanticipated release of hydrostatic test waters; these spills shall be coordinated by the MVP EC.

Following are specific Contractor EC responsibilities:

1. Determine any immediate threat to human health, the environment, and the neighboring community.
2. Ensure personnel safety and evacuate, if necessary.
3. Identify source, character, amount, and extent of release.
4. Determine if hazardous substances are involved.
5. Inform the MVP EC and follow instructions.
6. Direct and document remediation efforts to contain and control spill release.
7. Document remedial efforts.
8. Coordinate cleaning and disposal activities.

5.2.2 MVP EC Responsibilities

The MVP Emergency Coordinator shall coordinate clean-up of all spills of pipeline liquids, hazardous wastes, and any unanticipated release of hydrostatic test water.

Upon notification of pipeline liquid spills, hazardous materials spills, or the unanticipated release of hydrostatic test waters, the MVP EC shall be responsible for the following:

1. Assess situation for potential threat to human health, environment, and the neighboring community
2. Implement evacuation, if necessary
3. Ensure personnel safety
4. Control source as conditions warrant
5. Immediately notify supervisory personnel immediately for spills that meet one or more of the following criteria:
 - a. One pound or more of a solid material (excluding horizontal directional drilling mud spilled on land)
 - b. Five gallons or more of a liquid spilled on land
 - c. Any substance that creates a sheen on water
 - d. Air pollution incidents where there might be a release of a toxic substance
 - e. Unanticipated release of hydrostatic test water
6. If necessary, notify the local fire department, law enforcement authority, or health authority as appropriate, and provide the following information:
 - a. Name of the caller and call-back number

- b. The exact location and nature of the incident
 - c. The extent of personnel injuries and damage
 - d. The extent of release
 - e. The material involved and appropriate safety information
7. Ensure that any waste or product that might be incompatible with a released material is kept away from the affected area.
 8. Keep any potential ignition source away from emergency area, if spilled material is flammable.
 9. Minimize affected area with appropriate containment or diking.
 10. Assemble required spill response equipment as required (e.g., protective clothing, gear, heavy equipment, pumps, absorbent material, and empty drums).
 11. Place spilled material in appropriate containers, in accordance with the MVP Environmental SOPs.
 12. Label and store containers in accordance with the MVP Environmental SOPs.
 13. Coordinate waste disposal and equipment decontamination.
 14. Terminate response.
 15. Ensure that all emergency response equipment is fully functional. Any equipment that cannot be reused shall be replaced.
 16. For PCB spills, follow special spill response requirements related to PCB spills.
 17. Assist with the coordination of clean-up and disposal activities as described in Sections 4.4, 4.5, and 4.6.
 18. If necessary, contact outside remediation services to assist with clean-up.
 19. Complete Waste Removal Storage and Disposal Record Form to track waste generated during this project.
 20. Complete Field Spill Report (included at the end of this section) and distribute accordingly.
 21. For unanticipated release of hydrostatic test waters, notify state contact if required by state permit in accordance with timeframes required by state permit.
 22. As required by permit, arrange for immediate sampling of the test water (from the pipe or a representative sample of released water where possible) or soil where the test water was released and water from adjacent watercourse if test water was released into the watercourse. Samples shall be analyzed in accordance with hydrostatic test discharge permit criteria.
 23. Ensure that an MVP representative notifies the municipal manager and/or mayor, as required.

5.3 Emergency Equipment

The construction site and Contractor yards shall have adequate personnel and equipment necessary to divert any spill from waterbodies and wetland areas. Emergency equipment shall include, but is not limited to, shovels, backhoes, dozers, front-end loaders, oil absorbent booms, pillows, socks and/or mats, granular oil absorbent, and chemical absorbent pulp. Table 5-1 lists emergency response equipment and PPE (to be completed by Contractor).

TABLE 5-1
Spill Response Equipment

Equipment	Quantity	Location

TABLE 5-2
Fire Response Equipment

Equipment	Quantity	Location

TABLE 5-3
Personal Protective Equipment

Equipment	Quantity	Location

5.4 Spill Clean-Up/Waste Disposal Procedures

The following identifies the clean-up and control measures to be used in the event of a spill of oil, fuel, or hazardous substance or unanticipated release of hydrostatic test water.

5.4.1 Oil and/or Fuel Spills

- Ensure no immediate threat to surrounding landowners or environment.
- Remediate small spills and leaks as soon as feasible. Use absorbent pads whenever possible to reduce the amount of contaminated articles.
- Restrict the spill by stopping or diverting flow to the oil and/or fuel tank.
- If the release exceeds the containment system capacity, immediately construct additional containment using sandbags or fill material. Every effort must be made to prevent the seepage of oil into soils and waterways.

- If a release occurs into a facility drain or nearby watercourse, immediately pump any floating layer into drums. For high-velocity watercourses, place oils booms or hay bales between the release area and the site boundary and downstream of affected area. As soon as possible, excavate contaminated soils and sediments.
- After all recoverable oil has been collected and drummed, place contaminated soils and articles in containers.
- For larger quantities of soils, construct temporary waste piles using plastic liners and place the contaminated soils on top of the plastic and covered by plastic. Plastic-lined, roll-off bins should be leased for storing this material as soon as feasible.
- Label the drum following the procedures outlined in the MVP's Environmental SOPs.
- Move drum to secure staging or storage area.
- Document and report clean-up activities of the MVP EC as soon as feasible.
- If environmentally sensitive resources (e.g., wetlands, waterbodies) exist in the area, ensure that BMPs as described in the ESCP are used to minimize impact to these resources.

5.4.2 Hazardous Substance Releases

- Ensure no immediate threat to surrounding landowners or environment.
- Identify the material and quantity released.
- Block off drains and containment areas to limit the extent of the spill. Never wash down a spill with water.
- Ensure that PPE and containers are compatible with the substance.
- Collect and reclaim as much of the spill as possible using a hand pump or similar device. Containerize contaminated soils in an appropriate Department-of-Transportation approved container in accordance with the MVP's Environmental SOPs. (Note: Environmental SOP's are located in all division and area offices and kept by all engineering teams.) Never place incompatible materials in the materials in the same drum.
- Sample the substances for analysis and waste profiling.
- Decontaminate all equipment in a contained area and collect fluids in drums.
- Label the drum.
- Move the drum to secure staging or storage area.
- Document and report activities to the MVP EC as soon as feasible.
- If environmentally sensitive resources (wetlands, waterbodies) exist in the area, then ensure that BMPs as described in the ESCP are used to minimize impacts to these resources.

5.4.3 Unanticipated Release of Hydrostatic Test Water

- Ensure no immediate threat to surrounding landowners or environment.
- If environmentally sensitive resources (wetlands, waterbodies) exist in the area, then ensure that BMPs as described in the ESCP are used to minimize impacts to these resources.

5.5 Disposal of Contaminated Materials and/or Soils

- The Contractor shall work with the MVP EC to characterize waste generated during this project. All wastes generated as a result of spill response activities shall be analyzed to determine if hazardous or if PCBs are greater than 1 ppm. Knowledge of the contaminant(s) might be applied to classify the waste and spill materials as determined by the MVP EC.
- The Contractor is responsible for properly disposing of wastes generated during this project that is determined by the MVP EC to be nonhazardous and to contain PCBs less than 1 ppm; this includes obtaining applicable authorizations and registrations for waste disposal.
- The MVP EC is responsible for properly disposing of hazardous and PCB-containing wastes containing greater than 1 ppm generated during this project, including obtaining applicable U.S. Environmental Protection Agency ID numbers.
- Hazardous and PCB-containing waste shall be stored in a secured location (i.e. fenced, locked) until the material is transported off site. At no time shall hazardous waste be stored for more than 90 days or a waste containing PCBs with more than 50 ppm be stored for more than 30 days.

5.6 Equipment Cleaning/Storage

- Upon completion of remedial activities, the Contractor shall decontaminate emergency response equipment used to remediate a spill resulting from its operations. MVP shall be responsible if the spill is hazardous material.
- The Contractor shall be responsible for disposing of any contaminated waste or non-PCB containing waste generated as a result of the decontamination process.
- MVP shall be responsible for disposing of any contaminated Hazardous Waste or PCB Containing Material generated as a result of the decontamination process.
- The Contractor shall replace all spent emergency response equipment prior to resuming construction activities if spill resulted from their operations.
- The Contractor shall test and inventory reusable PPE prior to being placed back into service.

6.1 REGULATORY COMPLIANCE

This section provides the reader with a high-level overview of the regulatory requirements addressed in this SPCC Plan. This section is arranged by activity, in typical order or occurrence by job, with the corresponding regulation.

Regulatory Compliance by Activity			
Activity Type	Federal Regulation Citation	State Regulation Citation	SPCC Plan Section
General Applicability			
Is facility under purview of regulations?	40 CFR Part 112	9 VAC 25-91	
Does facility comply with applicable regulations?	40 CFR Part 112	9 VAC 25-91	
Materials Storage and Handling			
Material and Waste Inventory	40 CFR Part 112	9 VAC 25-91 ₁	Spill Plan (Section 3)Waste Management (Section 2)
Material Transport and Disposal	40 CFR Part 112	9 VAC 25-91 ₁	Contingency Plan (Section 5)
Spill Prevention and Containment			
Emergency Response Contacts	40 CFR Part 112	9 VAC 25-91 ₁	Spill Plan (Section 3)
Training	40 CFR Part 112	9 VAC 25-91 ₁	
Security	40 CFR Part 112	9 VAC 25-91 ₁	
Prevention and Preparedness	40 CFR Part 112	9 VAC 25-91 ₁	
Facility Information	40 CFR Part 112	9 VAC 25-91 ₁	
Facility Drainage and Routes of Flow	40 CFR Part 112	9 VAC 25-91 ₁	
Inspections and Reporting			
Emergency Response Contacts	40 CFR Part 112	9 VAC 25-91 ₁	Spill Plan (Section 3) Contingency Plan (Section 5)
Inspections, Tests, and Records	40 CFR Part 112	9 VAC 25-91 ₁	
Discharge Reporting	40 CFR Part 112	9 VAC 25-91 ₁	

*SPILL PREVENTION, CONTROL, AND COUNTERMEASURE (SPCC) PLAN AND
UNANTICIPATED DISCOVERY OF CONTAMINATION PLAN*

Regulatory Compliance by Activity			
Activity Type	Federal Regulation Citation	State Regulation Citation	Plan Section
Spills and Response			
Emergency Procedures and Response	40 CFR Part 112	9 VAC 25-91 ¹	Spill Plan (Section 3) Contingency Plan (Section 5)
Discharge Notification	40 CFR Part 112	9 VAC 25-91	
Clean-up	40 CFR Part 112	9 VAC 25-91 ¹	
Wastewater Discharge			
Facility Drainage	40 CFR Part 112	9 VAC 25-91 ¹	Spill Plan (Section 3)
¹ if an oil discharge contingency plan is required			

Appendix A

Unanticipated Discovery of Contamination Plan

Unanticipated Discovery of Contamination Plan Introduction

The purpose of this Unanticipated Discovery of Contamination Plan (Plan) is to provide work, investigation, and reporting procedures for responding to the unanticipated discovery of contamination in soil, groundwater, or sediment during excavation, construction, or maintenance activities associated with construction of the MVP Pipeline Project.

Consistent with this purpose, the objectives of this Plan are to protect the health and safety of project personnel and the environment and to prevent the spread of contamination during and after an unanticipated discovery of contamination.

The greatest potential for the discovery of unanticipated contamination will occur during the excavation of the pipeline trench and horizontal boring procedures. The following response plan will be executed if any Project personnel detects potential contamination such as:

- Odor;
- Visible staining on soil;
- Sheen on ground or purge water;
- Unidentified underground service tank; or
- Potential cultural resources, including human remains.

Unanticipated Discovery Response Plan

Stage 1 – Suspend Work Activities

All construction and/or maintenance work in the immediate area of the discovery shall stop. Personnel shall move to upwind areas as necessary.

Stage 2 – Identify Immediate Threats

If an immediate threat is detected, emergency response (i.e., 911) shall be notified. The area shall be evacuated.

Stage 3 – Identify and Secure Area

If safe to do so, the area immediately around the potential contamination shall be secured with safety fencing or flagging. Site personnel shall remain on site to restrict access as appropriate.

Stage 4 – Conduct Notifications

Appropriate MVP environmental professionals and officials shall be notified of the potential contamination. It shall be the decision of the MVP environmental professional (TBD) to determine environmental agency or public official notification requirements. Primary points of contact are:

MVP: Megan Neylon, Environmental Permitting Supervisor, 724-873-3645

Virginia DEQ:VA Department of Emergency Management Watch Center, 800-468-8892USFS : Jefferson National Forest Supervisor, 540-265-5118

Stage 5 – Discovery Documentation Protocol

An appropriate MVP employee or designee will document the unanticipated contamination utilizing the attached Worksheet 1. Worksheet 1 includes instructions for the appropriate MVP employee or designee to record the site name, locations, and how suspected contamination was determined. The MVP employee or designee will coordinate with the construction contractor(s) who identified the contamination to assist in completing Worksheet 1.

Stage 6 – Remedial Action Planning

An onsite meeting (if appropriate) will be conducted among site personnel, MVP environmental professionals, and any appropriate contamination response contractors to determine remediation requirements and methodologies. If remediation activity is appropriate, an environmental consultant (if appropriate) should be contacted to assist with the remedial activity. Remedial activities should be conducted according to the following general sequence of events. This is a general plan and is not meant to apply to all contamination situations. A more robust, site-specific remedial action plan should be completed by an environmental consultant prior to completing remedial activities.

Step 1: Sampling – Representative samples should be collected and submitted to an environmental laboratory for analysis and/or waste classification. Results of this analysis may dictate notification requirements. An environmental consultant can assist in the determination of these requirements.

Step 2: Remedial Action Determination – Following laboratory analysis, the MVP environmental professional and/or the environmental consultant will evaluate the analysis results and, if appropriate, identify the type of remediation (in-situ, removal, etc.) to be completed.

Step 3: Remedial Action – MVP will mobilize an appropriate contractor, and remediation activities will be conducted. Any soil and/or groundwater suspected of containing contamination will be segregated from clean soil and/or water using plastic sheets, fractionation tanks, or other appropriate methodologies. Containers will be clearly labeled. Known hazardous wastes will be labeled and separated with orange construction fencing.

Step 4: Disposal – Wastes will be disposed of properly at a permitted facility. MVP environmental professional or its environmental consultant will determine disposal requirements.

Stage 7 – Record Keeping

A record of the sequence of events from the beginning (unanticipated discovery) to the end (disposal) of the incident will be recorded and kept on file with the MVP environmental professional in accordance with all mandated record keeping requirements.

Worksheet 1 – Unanticipated Discovery of Contamination Documentation Worksheet

Instructions: Complete this worksheet to document an unanticipated discovery of contamination event.
Use a separate sheet (copy) for each occurrence.

A. Site Name, Physical Location, and Milepost

B. How Suspected Contamination was Determined (odor, stain, sheen, etc.). Include photographs as appropriate.

C. List dates, times, and officials notified

Environmental Response Contact Sheet

Primary points of contact are:

MVP:	Megan Neylon, Environmental Permitting Supervisor, 724-873-3645
Virginia DEQ:	Virginia Department of Emergency Management, 800-468-8892

Additional points of contact may be identified prior to construction

Appendix B

Key Emergency Contacts

Following are the key personnel who shall be contacted in the event of an emergency or spill incident.

	Contact Name	Phone Number
1.	MVP Emergency Contacts MVP Emergency Coordinator (within 15 minutes of incident)	To be provided prior to construction
2.	Contractor Emergency Contact Contractor Emergency Coordinator	To be provided prior to construction
3.	Local Authorities (as necessary) State Police Local Police Local Fire Department Hospital Ambulance	To be provided prior to construction
4.	Environmental Agencies Notification to be made by an MVP representative. Virginia Department of Emergency Management Watch Center (800)-468-8892 (24 hours)	
5.	Potential Environmental Remedial Service Contractors (verify before issuing project-specific SPCC Plan) Clean Harbors Environmental Services, Inc.: 800-645-8265 Safety- Kleen (FS), Inc.: Edward A. Mitchell, 713-750- 5800 U.S.A. Environment: Cesar Garcia, 713-425-6925 or 832-473-5354 (cell phone) WRS Infrastructure and Environment, Inc.: Steve Maxwell, 281-731-0886	

Appendix C

Petroleum and Hazardous Material Spill Report

The Contractor must complete this for any petroleum or hazardous material spill regardless of size, and submit the form to the MVP EC within 48 hours of the occurrence.

Date of Spill _____ Incident No.: _____ Date of spill discovery

Time of Spill _____ Time of Spill Recovery _____

Location Name: _____ Spread: _____ County _____

Section _____ Township _____ Range _____

Name and title of discoverer: _____

Type of material spilled and product name

Manufacturer's name: _____

Legal description of spill location _____

Directions from nearest community:

Estimated volume of spill:

Weather conditions: _____

Topography and surface conditions of spill site:

Spill medium (e.g., pavement, sandy soil, water):

Proximity of spill to surface waters or wetland:

Did the spill reach a watercourse? ☐ Yes ☐ No

If so, was a sheen present? ☐ Yes ☐ No

Direction and time of travel (if in watercourse): _____

Name and telephone number of responsible party: _____

Causes and circumstances resulting in the spill: _____

*SPILL PREVENTION, CONTROL, AND COUNTERMEASURE (SPCC) PLAN AND
UNANTICIPATED DISCOVERY OF CONTAMINATION PLAN*

Extent of observed contamination, both horizontal and vertical (e.g., spill-stained soil in a 5-inch radius to a depth of 1 inch):

Potentially affected resources and installations: _____

Potential impact on human health:

Immediate spill control and/or clean-up methods used and implementation schedule: _____

Current status of clean-up actions: _____

Name, company, address, and telephone number for the following:

Construction Superintendent: _____

Spill Coordinator: _____

Person who reported the spill: _____

Environmental Inspector: _____


On-Scene Agency Coordinator (where applicable): _____

Form completed by: _____ Date _____

APPENDIX 10

Miscellaneous

[i.e. Maps, Impaired Water Fact Sheets, etc.]

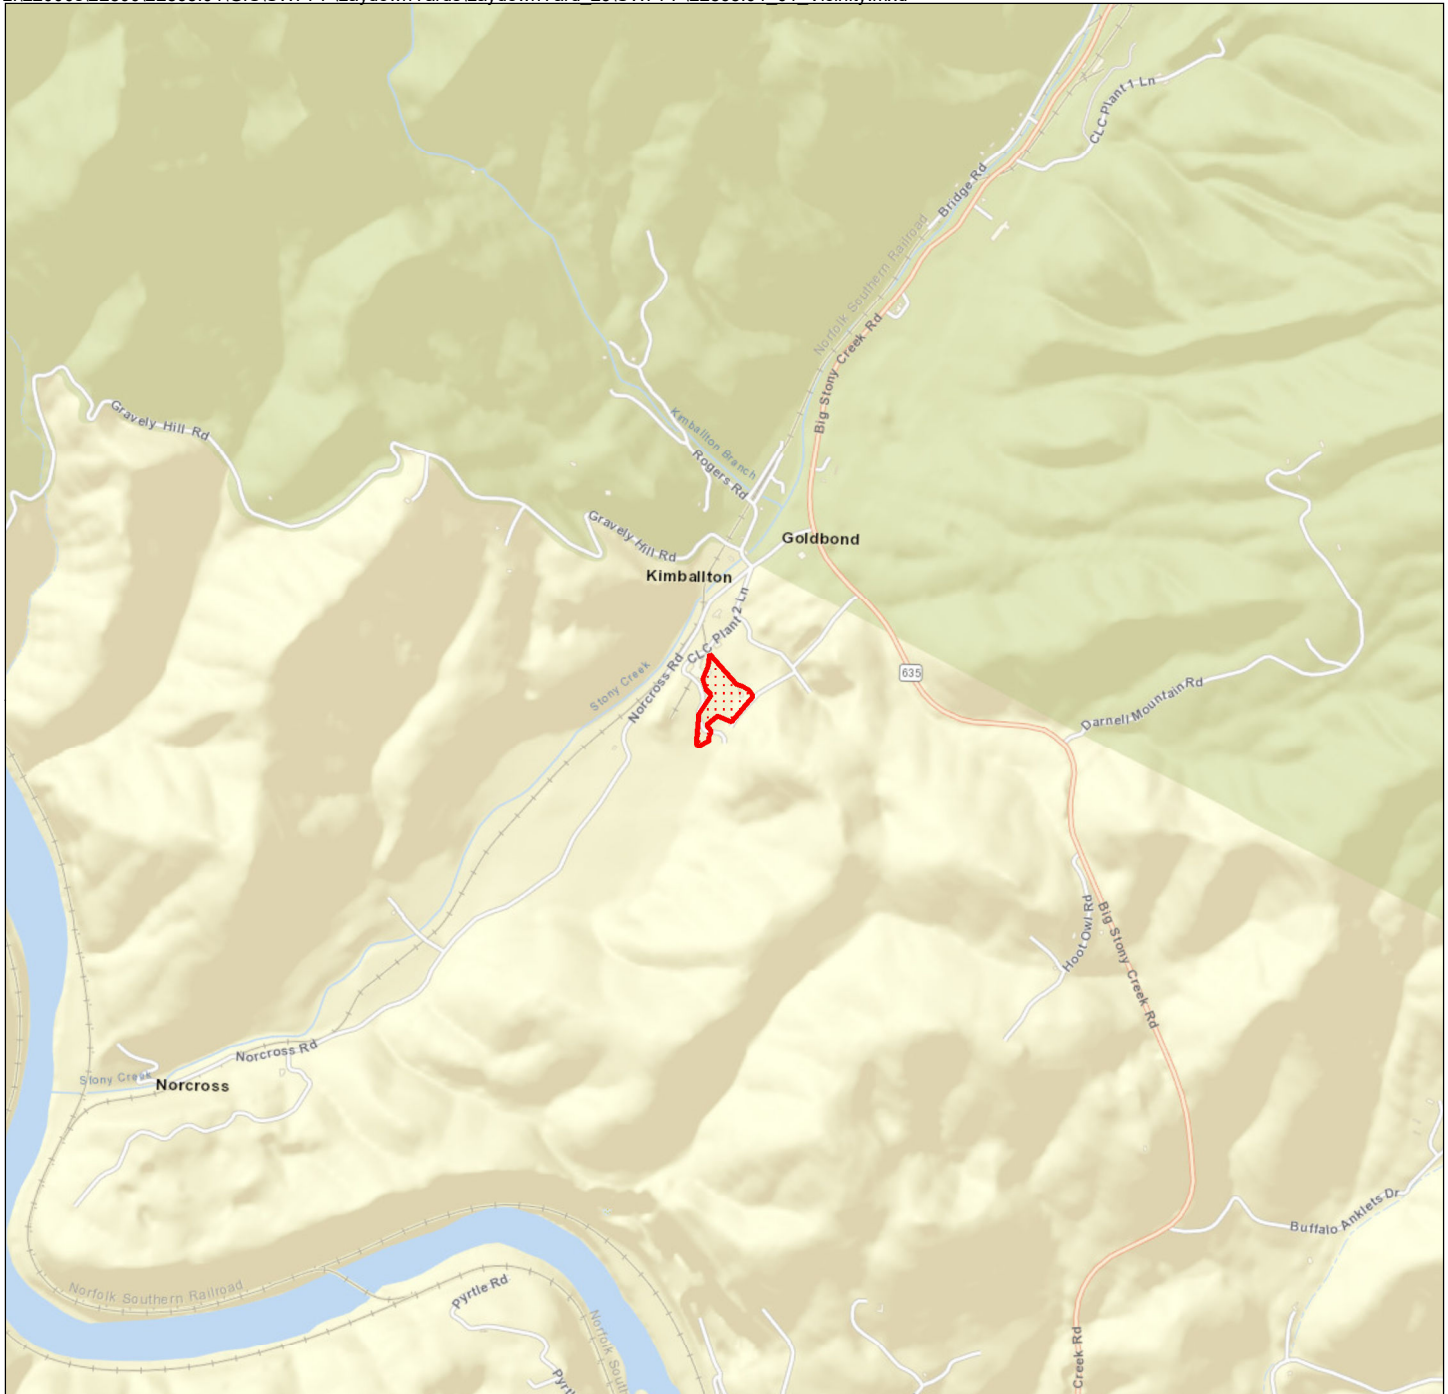



Base Map Source: ESRI

 Laydown Yard 29



Vicinity Map
Mountain Valley Pipeline - Laydown Yard 29
WSSI #22865.01
Original Scale: 1" = 2000'




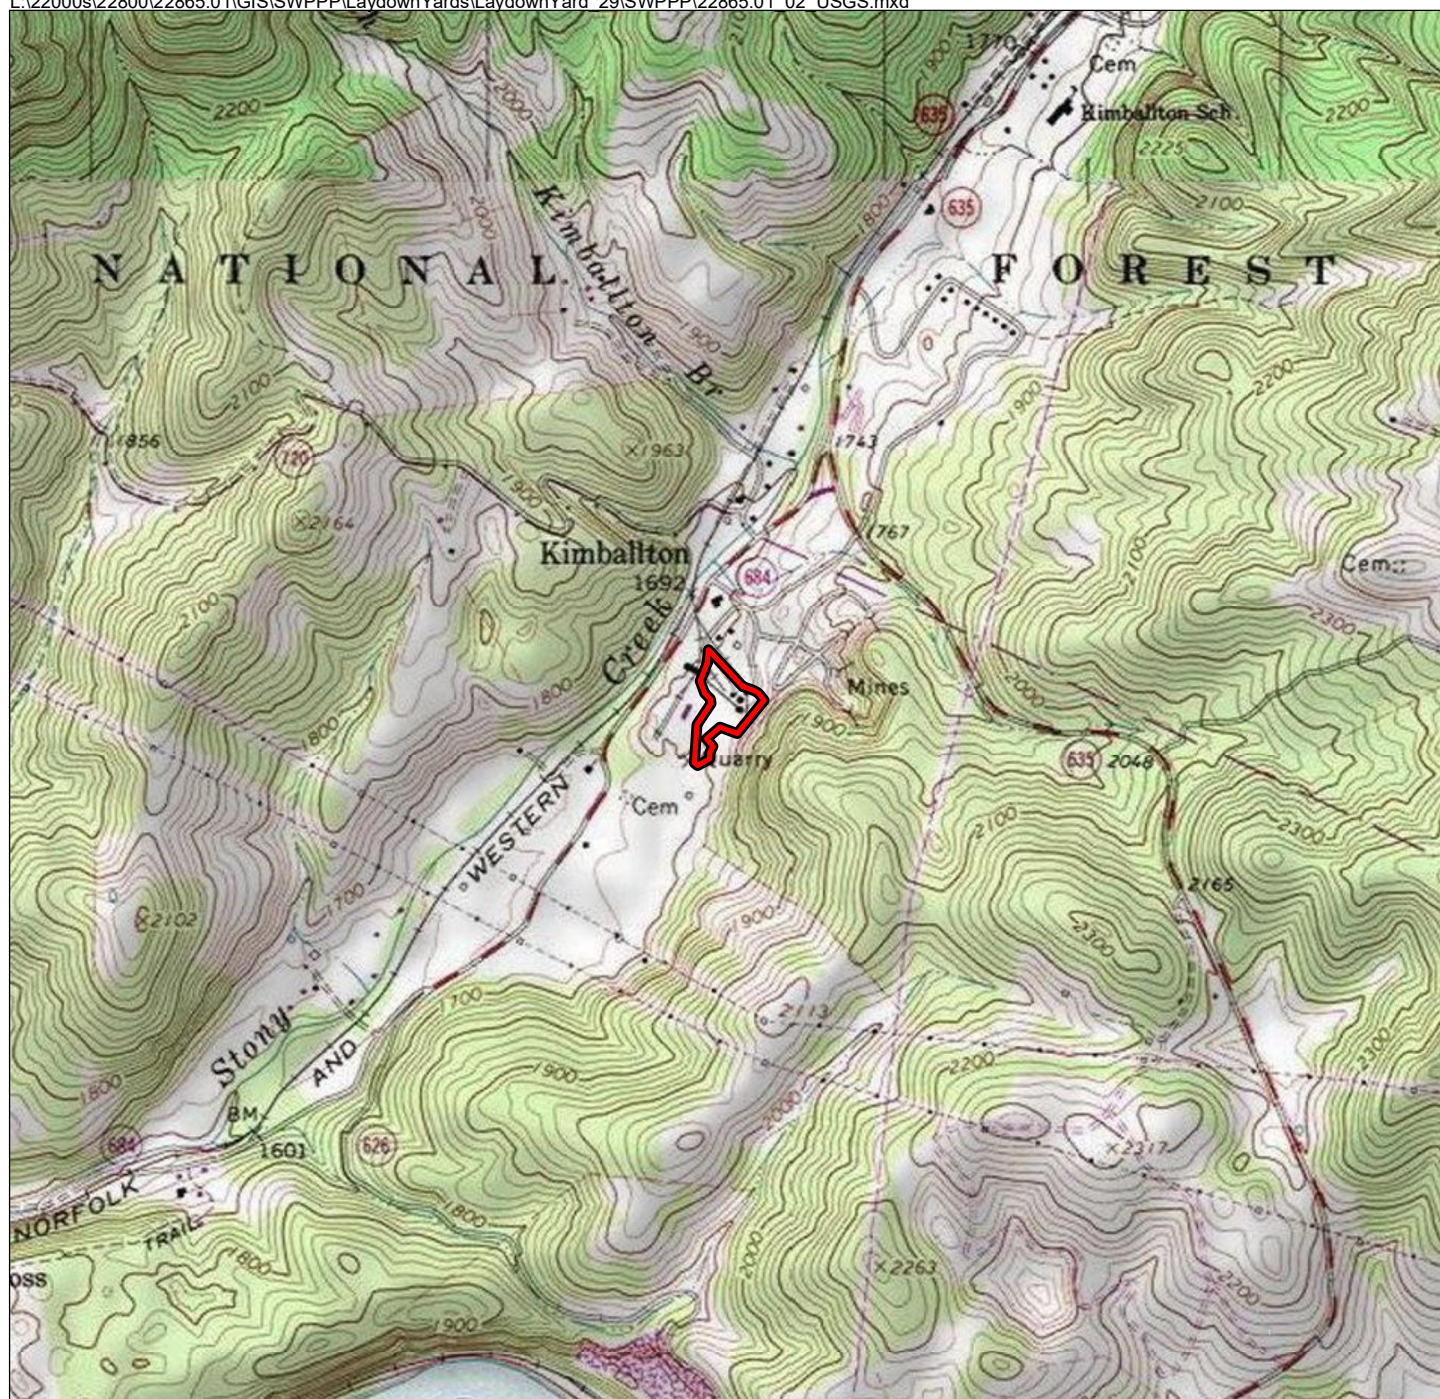


**USGS Quad Map - ESRI USA Topo
Giles County, VA
Mountain Valley Pipeline - Laydown Yard 29
WSSI #22865.01
Original Scale: 1" = 2000'**



Latitude: 37° 21' 47" N (37.363133°)
Longitude: -80° 40' 36" W (-80.676804°)
Hydrologic Unit Code (HUC): 050500020305
HUC 12 Name: Stony Creek
COE Region: Eastern Mountains & Piedmont



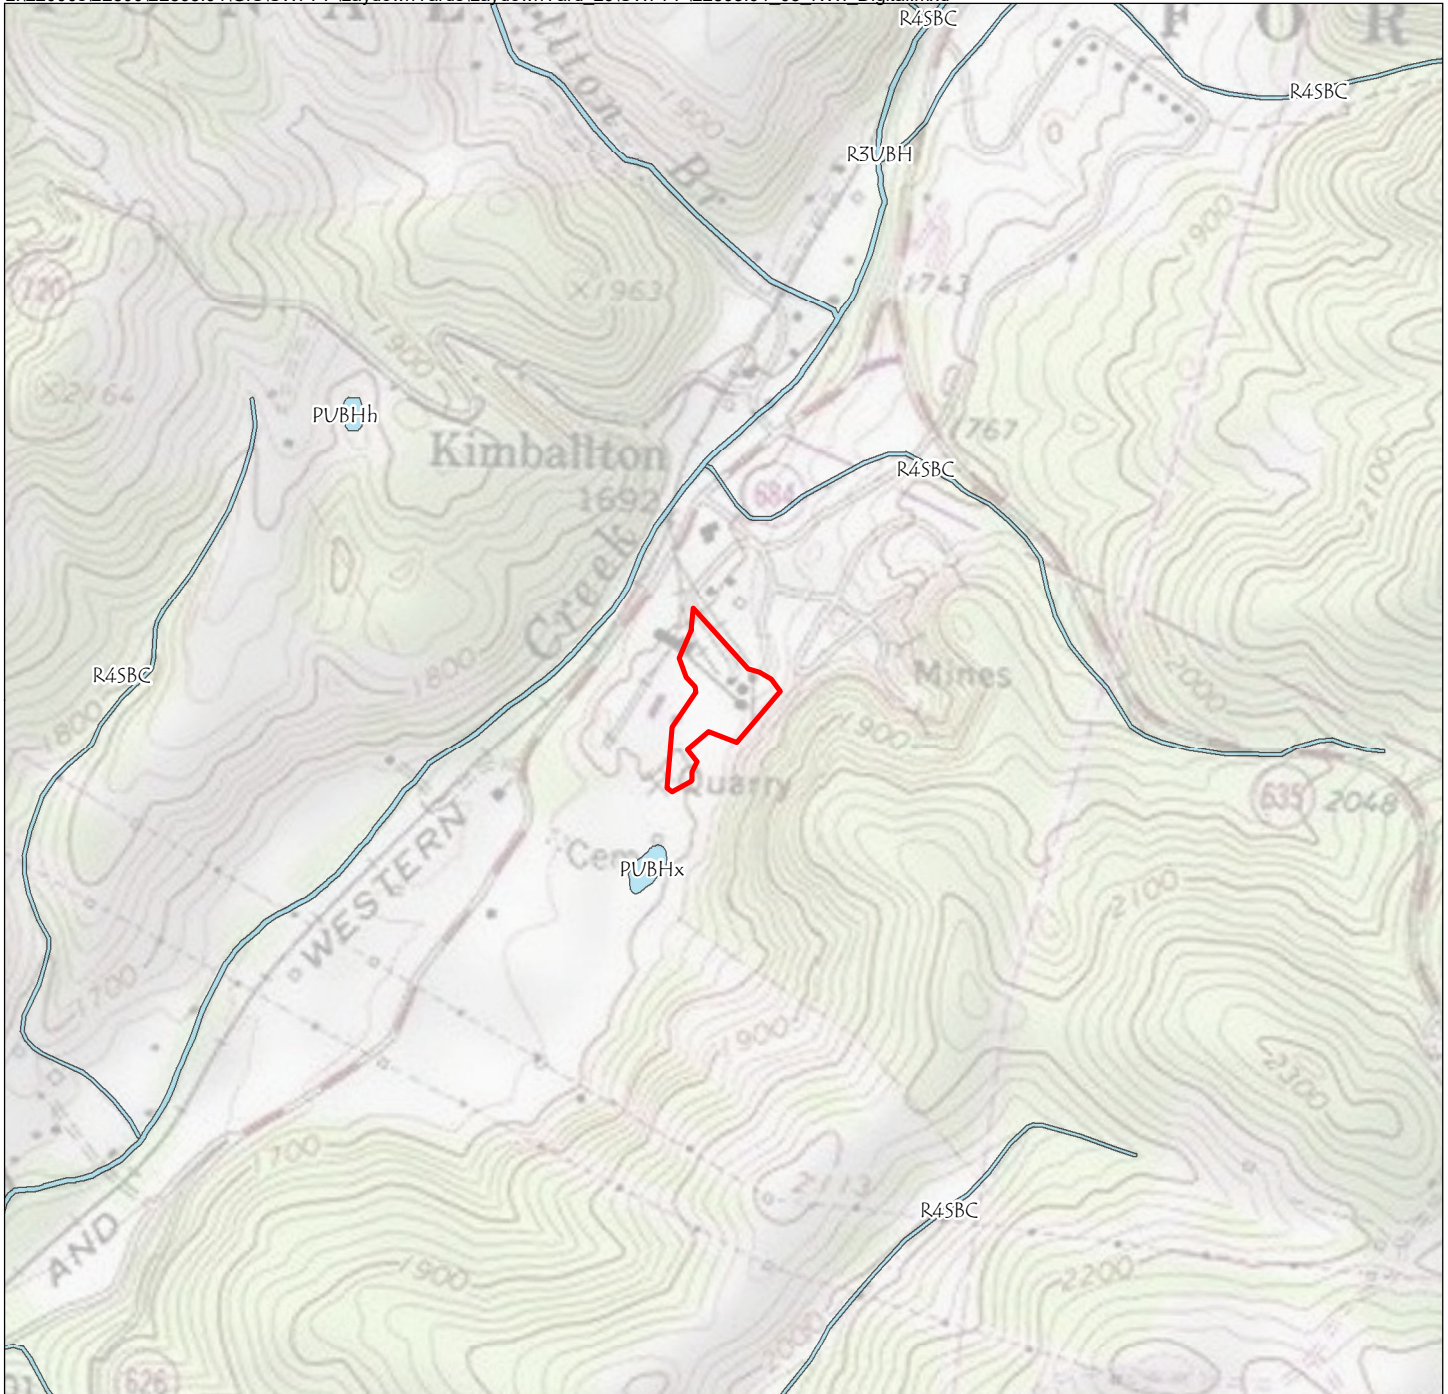


Laydown Yard 29

Wetland Type

- Open Water
- Estuarine and Marine Wetland
- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Other Wetland

Digital National Wetlands Inventory Map
Mountain Valley Pipeline - Laydown Yard 29
WSSI #22865.01
Original Scale: 1" = 1000'



Data Updated: May 2016
 Source: <http://www.fws.gov/wetlands/Data/State-Downloads.html>



Spring 2015 Natural Color Imagery
Mountain Valley Pipeline - Laydown Yard 29
WSSI #22865.01
Original Scale: 1" = 200'

 Laydown Yard 29





Photo Source: Virginia Base Mapping Program (VBMP).

Mountain Valley Pipeline - Watershed with TMDLs (DEQ)



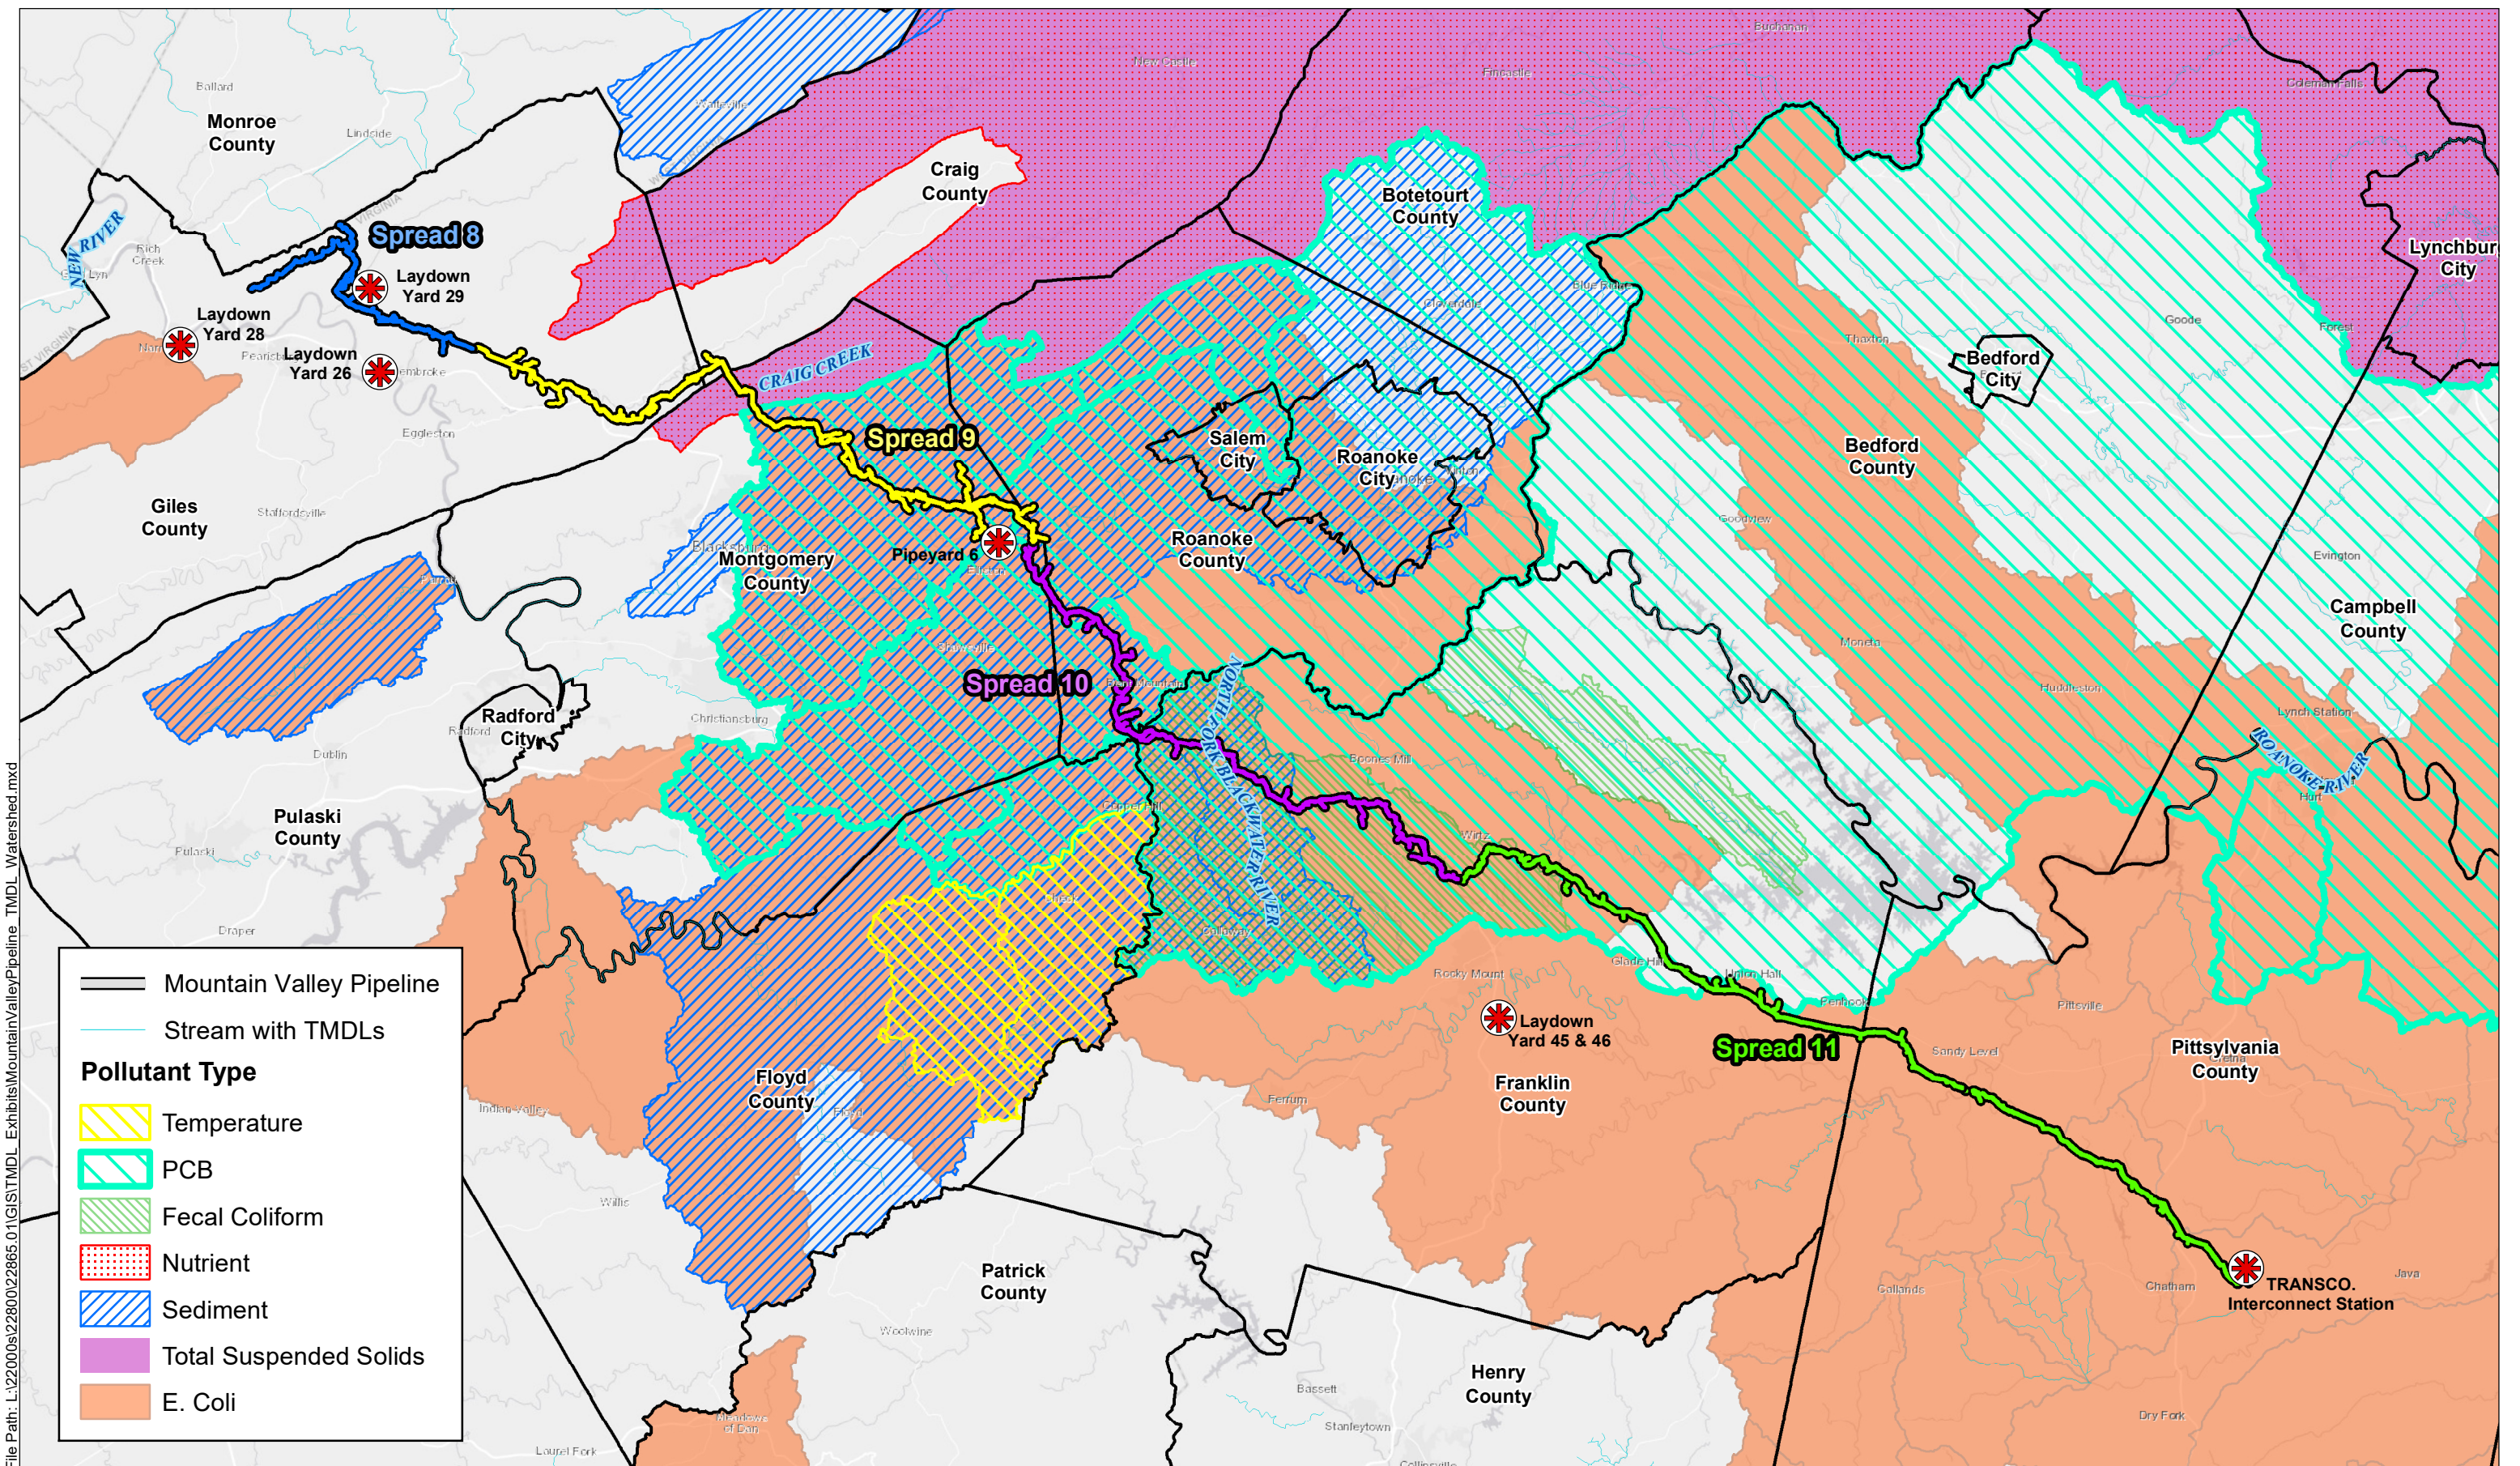

2016 Impaired Waters

Category 4 & 5 by Impaired Area ID*

New River Basin

Cause Group Code: **N29R-01-PCB - New River, Reed Creek, Claytor Lake, Peak Creek, Stony Creek, Walker Creek, And Unknown Tributary XAG.**

Location:	The impairment begins at the I-77 bridge crossing the New River and extends downstream to the VA/WV State Line and includes the tributaries Peak Creek and Reed Creek as described below.
City/County	Giles Co., Montgomery Co., Pulaski Co., Radford City, Wythe Co.
Use(s):	Fish Consumption
Cause(s) / VA Category:	PCB in Fish Tissue / 5A

The Virginia Department of Health (VDH) issued a fish consumption advisory on August 6, 2001 for polychlorinated biphenyls (PCBs) for the lower portion of the New River (Rt. 114 Bridge downstream to the VA / WV State Line - 52.0 miles) based on fish tissue collections from Carp. An Advisory extension to Claytor dam was issued 8/06/2003 (11.47 miles) recommends that no carp be consumed in these waters and no more than two meals per month of flathead and channel catfish. The VDH PCB Fish Consumption Advisory was further extended upstream on the New River (13 miles) to the I-77 Bridge to include the lower portions of Peak Creek (4.02 miles), Reed Creek (16.35 miles) and Claytor Lake (4,287 acres) on 12/02/2004. The VDH advises consumption should not exceed two meals per month for carp and smallmouth bass. Stony Creek is a 2010 Integrated Report (IR) addition to the original 2002 303(d) Listing. An unnamed tributary (XAG) is an addition with the 2016 IR. The VDH level of concern is 50 parts per billion (ppb) in fish tissue.

Water column data from 2010 thru 2016 are listed below where excursions of the WQS water column criterion of 640 pg/L are contravened causing an Observed Effect (OE) or 303(d) Listing for 'PCBs in Water Column'. Water column data collection is in support of TMDL development for PCBs in the New River drainage. Sample collections are made in both wet weather (WW) and dry weather (DW) conditions.

2012 & 2014 Fish tissue and water column data follow reporting exceedances of the WQS based 20 ppb fish tissue value (TV) (VDH Lower Level of Concern 50 ppb). And excursions of the WQS water column criterion of 640 pg/L. Fish tissue data are in addition to previous years collections. Fish tissue data are reviewed by the VDH in making an advisory determination. A complete listing of fish tissue collection sites and associated fish tissue data are available at <http://www.deq.virginia.gov>. A more detailed presentation of the data can also be found using an interactive mapping application at <http://www.deq.virginia.gov>. The VDH Advisory information is also available via the web at <http://www.vdh.virginia.gov>.

9-RDC009.00 (Near Rt. 619 at Grahams Forge) 2012 two species analyzed - Carp exceeds WQS TV of 20 ppb (5 fish composite [62.6 - 69.4 cm] at 68.24 ppb. Remaining species analyzed Smallmouth Bass (5 fish composite [21.8 - 26.6 cm] at 3.04 ppb.

2014 two species analyzed - Carp composites exceed WQS TV of 20 ppb (4 fish composite [67.9 - 76.5 cm] at 75.67 ppb and (5 fish composite [64.5 - 69.8] at 85.77. Remaining species analyzed Smallmouth Bass (5 fish composite [23.1 - 30.3 cm] at 2.46 ppb.

9-NEW107.51 (New River near Allisonia) 2014 fish tissue WQS TV of 20 ppb: Three species analyzed - Channel Catfish exceeds WQS TV of 20 ppb; 3 fish composite [61.2 - 69.5 cm] at 23.02 ppb; Smallmouth Bass (3 fish composite [40.1 - 49.6 cm]) at 2.45 ppb; Carp exceeds (5 fish composite [56.5 - 70.4 cm]) at 45.12 ppb; and Carp (5 fish composite [55.3 - 71.3 cm] at 8.79 ppb.

9-NEW098.32 (Rt. 672 Bridge, Lighthouse) 2012 four species analyzed - Channel Catfish exceeds WQS TV of 20 ppb; (2 fish composite [70.5 - 71.5 cm] at 65.15 ppb. Remaining species analyzed Largemouth Bass (5 fish composite [34.5 - 43.1]) at 7.76 ppb; Spotted Bass (5 fish composite [34.2 - 38.2 cm]) at 11.00 ppb; and Carp (3 fish composite [45.8 - 56.5]) at 6.04 ppb.

9-PKC009.53 (Upstream of XAG confluence) 2014 water column DW 197.02 pg/L- 'FS'; WW 799.75 pg/L- 'OE'.

9-XAG000.01 (Mouth of X-Trib XAG near former Allied Site) 2014- Water column PCB WQS criterion of 640 pg/L: DW 1,458.87 pg/L (7/31/2014); WW 1,754.02 pg/L (10/15/2014).

9-XFQ000.77 (Off Pierce Ave. near Calfee Park) 2014 water column PCB WQS criterion of 640 pg/L: DW 194.99 pg/L- 'FS'; WW 686.76 pg/L- 'OE'.

9-PKC007.82 (Route 99 Bridge) 2012 three species analyzed - Stoneroller exceeds WQS criterion of 20 ppb (15 fish comp. [14.3 - 16.0 cm] at 33.18 ppb. Remaining species analyzed Rock Bass (5 fish comp. [16.7 - 18.6 cm]); at 10.49 ppb) and Redbreast Sunfish (5 fish comp. [14.3 - 18.1 cm]; at 3.01 ppb).

2013 PCB water column excursions are DW 1,193.64 pg/L; WW 2,436.73 pg/L and 2014 one sample 'FS DW 389.51 pg/L and one excursion of the WQS 640 pg/L criterion at WW 1,252.42 pg/L.

9-PKC004.65 (Rt. 100 Bridge) 2012 four species analyzed. Channel catfish exceeds WQS criterion of 20 ppb (2 fish composite [63.1 - 69.0 cm] at 33.15 ppb. Remaining species analyzed Largemouth Bass (5 fish composite [33.4 - 40.8 cm]; at 2.68 ppb), Carp 2 sizes (4 fish composite [54.6 - 62.0 cm]; at 2.32 ppb) and (4 fish composite [54.6 - 62.0 cm]; at 9.16 ppb) and Smallmouth Bass (3 fish composite [35.3 - 42.6 cm]; at 6.90 ppb).

One 2014 water column sample exceeds the WQS criterion of 640 pg/L at 1,075.73 pg/L.

9-NEW088.86 (New River Claytor Lake at Dam) 2012 six species analyzed - Flathead Catfish exceeds WQS criterion of 20 ppb (2 fish composite [83.0 - 87.5 cm]) at 86.67 ppb. Remaining species analyzed Carp (4 fish composite [56.5 - 67.0 cm] at 2.05 ppb; Channel Catfish (1 fish [58.8 cm]) at 7.43 ppb; Largemouth Bass (5 fish composite [32.5 - 34.5 cm] at 0.36 ppb; Smallmouth Bass (4 fish composite [27.0 - 32.2 cm] at 0.88 ppb; Spotted Bass (3 fish composite [28.8 - 36.8 cm] at 0.00 ppb.

9-NEW085.94 (New River downstream of Claytor Dam) 2012 two species analyzed - Flathead Catfish exceeds WQS criterion of 20 ppb (5 fish composite [57.5 - 70.3 cm]) at 33.74 ppb. Remaining species analyzed Carp (5 fish composite [62.6 - 81.0 cm] at 11.27 ppb.

9-NEW081.72- (Route 11 Bridge - at Radford) 2010 water column PCB WQS criterion of 640 pg/L: DW 320 pg/L - 'FS'; WW exceeds at 4,739 - 'OE'. 2011 water column WW 243.70 pg/L - 'FS'. 2013 water column WW exceeds at 647.88 pg/L- 'OE'.

9-NEW079.19 (New River below Radford University) 2012 one species two exceeding composites analyzed - Carp exceeds WQS criterion of 20 ppb (2 fish composite [67.5 - 76.5 cm] at 53.28 ppb and Carp exceeding (2 fish composite [76.8 - 83.6 cm] at 94.85 ppb.

9-NEW066.90 (New River at Whitethorne) 2012 one species analyzed exceeds WQS criterion of 20 ppb Carp (1 fish [72.0 cm] at 125.58 ppb.

9-LWK000.77 (Rt. 100 Bridge) 2011 PCB water column WW 642.4 pg/L- 'OE'; 2014 water column DW 39.79 pg/L- 'FS'.

9-WLK004.34 (Route 622 Bridge - Giles Co.) Water column samples find two excursions of the WQS criterion of 640 pg/L. 2010 WW at 1,706 pg/L and 2011 WW at 648.8 pg/L. And a third sample 2014 DW at 60.12 pg/L 'FS'.

9-NEW050.70 (New River near Pembroke) 2012 three species analyzed Carp exceeds WQS criterion of 20 ppb (2 fish composite [67.5 - 71.6 cm] at 419.87 ppb and Channel Catfish (1 fish [58.1 cm]) at 23.26 ppb. Remaining species analyzed Flathead Catfish (1 fish [51.4 cm] at 9.60 ppb.

9-SNC000.20- 2004 fish tissue finds with application of the new WQS TV for PCB (20 ppb) the addition of 3 species exceeding the new TV criterion. Rock Bass (10 fish composite [size 16-20 cm] at 25.21, Smallmouth Bass (3 fish composite [size 28.6 - 30.5 cm] at 22.13 and White sucker (1 fish [38.4 cm] at -0.08 ppb. Stony Creek is therefore a 2010 addition based on the new WQS PCB tissue value of 20 ppb.

9-NEW038.71 (New River below Celeanse) 2012 two species analyzed - Each of the following exceed the WQS criterion of 20 ppb. Carp (2 fish composite [68.1 - 69.0 cm] at 355.63 ppb and Flathead Catfish (1 fish [56.0 cm] at 25.39 ppb. 2010 water column PCB DW- 129 pg/L- 'FS'; Wet 784 pg/L- 'OE' and 2011 water column PCB Wet- 222 pg/L- 'FS'

9-WFC003.69 (Route 724 Bridge at Gage) 2014 water column DW 114.7 pg/L- 'FS'; WW 1,527.45 pg/L- 'OE'.

9-WFC000.20 (Route 61 Bridge) 2011 water column WW 1,220.1 pg/L- 'OE'; 2013 water column WW 201.31 pg/L- 'FS'. 2014 water column WW 163.39 pg/L- 'FS'; DW 117.93 pg/L- 'FS'.

9-NEW030.15 (Route 460 Bridge at Glen Lyn) 2012 one species analyzed - Each of the following exceed the WQS criterion of 20 ppb. Carp 1 (1 fish [85.0 cm] at 234.01 ppb; Carp 2 (2 fish composite [72.5 - 74.8 cm]) at 448.15 ppb.

9-NEW031.00 (Above Glen Lyn) 2010 water column PCB DW- 66 pg/L 'FS'; WW- 841 pg/L 'OE'.

9-NEW028.95 (New River below Glen Lyn) 2010 water column PCB DW 177.5 pg/L- 'FS'; WW- 709.9 pg/L 'OE'. 2011 water column PCB DW- 110.4 pg/L 'FS'; WW- 399.6 pg/L 'FS'. 2013 water column WW 284.08 pg/L- 'FS'; NA 116.76 pg/L- 'FS'. 2014 water column WW 529.48 pg/L- 'FS'; DW 121.59 pg/L- 'FS'.

Assessment Unit	Water name	Location Description	Cause Category	Cause Name	Cycle First Listed	TMDL Schedule	Size
VAW-N28R_SNC01A00	Stony Creek	Stony Creek mainstem waters from its mouth on the New River upstream to Chemical Lime Company's outfall on Stony Creek (NE75).	5A	PCB in Fish Tissue	2010	2014	1.36
VAW-N28R_SNC02A00	Stony Creek	Stony Creek mainstem waters from the Chemical Lime Company outfall on Stony Creek upstream to the Kimbalton Branch confluence on Stony Creek (NE75).	5A	PCB in Fish Tissue	2010	2014	0.63
VAW-N28R_SNC03A00	Stony Creek	Stony Creek mainstem waters from the confluence of Kimbalton Branch upstream to the mouth of Laurel Branch (NE75).	5A	PCB in Fish Tissue	2010	2014	1.69
VAW-N28R_SNC04A00	Stony Creek	Stony Creek mainstem from the confluence of Laurel Branch upstream to the mouth of Pine Swamp Branch (NE75).	5A	PCB in Fish Tissue	2010	2014	4.69

New River, Reed Creek, Claytor Lake, Peak Creek, Stony Creek, Walker Creek, And Unknown Tributary XAG.

Estuary (sq. miles) Reservoir (acres) River (miles)

PCB in Fish Tissue / 5A

Total impaired size by water type:

8.37

Impaired area ID: VAW-N28R-01

Fish Consumption

Sources:

- Source Unknown

* Narrative descriptions, location and city/county describe the entire extent of the impairment. Sizes may not represent the total size of the impairment.